INCH-POUND

MS27291E(USAF)

31 January 1994

SUPERSEDING
MS27291D(USAF)
14 NOVEMBER 1977

MILITARY SPECIFICATION SHEET

SUPPORT, CABLE, ELECTRICAL CONNECTOR

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-26500.

Inactive for Air force New Design equipment or modification of existing equipment after 14 Nov 1977. Use MIL-C-83723, Series III, which are interchangeable.

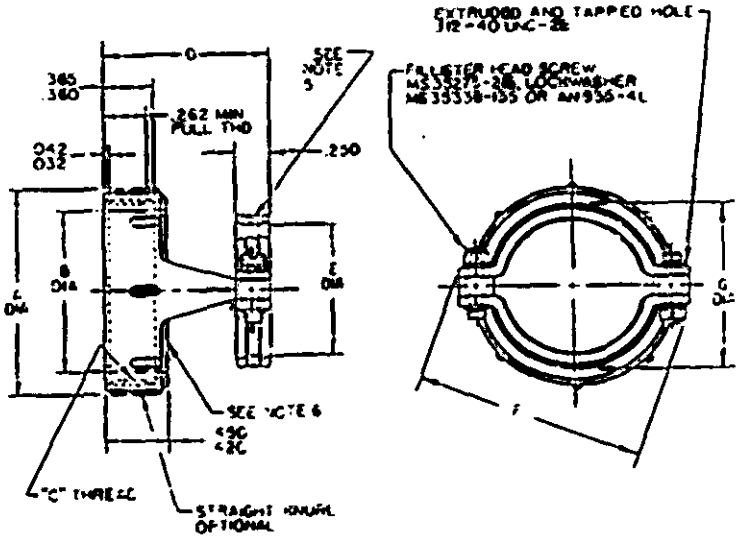


FIGURE 1. Dimensions and configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are .005 three place decimals and .02 for two place decimals.
3. All threads are in accordance with FED-STD-H28 (1969) Screw-thread-Standards for Federal Services.
4. Remove all burrs and sharp edges.
5. Material: Cable strap; aluminum alloy in accordance with QQ-A-367 or QQ-A-250 or stainless steel type, 300 or 216 series. Cable strap for use with class R and F connectors. For aluminum alloy, anodize in accordance with MIL-A-8625 or suitable hard anodizing process to meet the performance requirements of MIL-C-26500 and MIL-C-83723. For stainless steel the finish shall be black oxide or equivalent. Cable strap for use with class G connectors; for stainless steel, chromium plating in accordance with QQ-C-320, class 2a, type II, .0002 minimum thickness.
6. Cable support; aluminum alloy in accordance with QQ-A-591 composition 13, A13, A380 or 380. Cable support use with class R and F connectors; for aluminum alloy, in accordance with MIL-A-8625 or suitable hard anodizing process to meet the performance requirements of MIL-C-26500 and MIL-C-83723. Cable support for use with class G connectors; for aluminum alloy, chromium plating in accordance with QQ-C-320, class 2a, type II, .0002 minimum thickness.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

MS PART NUMBER	FOR USE WITH CLASS CONNECTOR	SHELL SIZE	A MAX DIA	B DIA ±.005	"C" NOM UNEF-2B THREAD	D ±.015	E DIA ±.005	F MAX	G DIA MAX.
MS27291-1	R, F	10	.731	.459	.5625-24	.935	.270	.914	.435
MS27291-101	G	10	.731	.459	.5625-24	.935	.270	.914	.435
MS27291-2	R, F	12	.919	.636	.750	.935	.400	1.026	.565
MS27291-201	G	12	.919	.636	.750	.935	.400	1.026	.565
MS27291-3	R, F	14	.981	.698	.8125	1.170	.460	1.090	.625
MS27291-301	G	14	.981	.698	.8125	1.170	.460	1.090	.625
MS27291-4	R, F	16	1.106	.823	.9375	1.170	.610	1.250	.775
MS27291-401	G	16	1.106	.823	.9375	1.170	.610	1.250	.775
MS27291-5	R, F	18	1.231	.941	1.0625	1.170	.690	1.358	.855
MS27291-501	G	18	1.231	.941	1.0625	1.170	.690	1.358	.855
MS27291-6	R, F	22	1.481	1.191	1.3125	1.170	.940	1.604	1.105
MS27291-601	G	22	1.481	1.191	1.3125	1.170	.940	1.604	1.105
MS27291-13	R, F	8	.606	.334	.4375	.935	.186	.789	.351
MS27291-701	G	8	.606	.334	.4375	.935	.186	.789	.351
MS27291-14	R, F	20	1.356	1.066	1.1875	1.170	.816	1.481	.981
MS27291-801	G	20	1.356	1.066	1.1875	1.170	.816	1.481	.981
MS27291-15	R, F	24	1.606	1.316	1.4375	1.170	1.066	1.729	1.231
MS27291-901	G	24	1.606	1.316	1.4375	1.170	1.066	1.729	1.231

MS PART NUMBER	FOR USE WITH CLASS CONNECTOR	SHELL SIZE	A MAX DIA	B DIA ±.005	"C" THREAD -36NS-2A	D ±.015	E DIA. ±.015	F MAX	G DIA MAX.
MS27291-702	E	08	.606	.334	.4340	.935	.186	.769	.351
MS27291-102	E	10	.731	.459	.5634	.935	.270	.914	.435
MS27291-202	E	12	.919	.631	.7334	.935	.400	1.026	.565
MS27291-302	E	14	.981	.698	.8032	1.170	.460	1.090	.625
MS27291-402	E	16	1.106	.823	.9302	1.170	.610	1.250	.775
MS27291-502	E	18	1.231	.941	1.0362	1.170	.690	1.358	.855
MS27291-802	E	20	1.356	1.066	1.1611	1.170	.816	1.481	.981
MS27291-602	E	22	1.481	1.191	1.2862	1.170	.940	1.604	1.105
MS27291-902	E	24	1.606	1.316	1.4111	1.170	1.066	1.729	1.231

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material: See notes 5 and 6

CONCLUDING MATERIAL

Custodian:
Air Force - 85

Review activities:
Air Force -11, 15, 17, 99
DLA - ES

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5935-F512)

Source: https://assist.dla.mil 4 Downloaded: 2026-10-23T15:21Z
Check the source to verify that this is the current version before use.