


FED SUP CLASS
5935

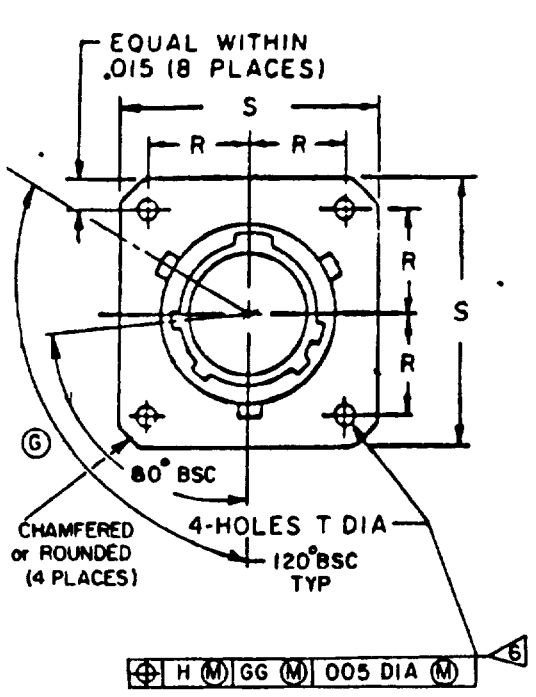

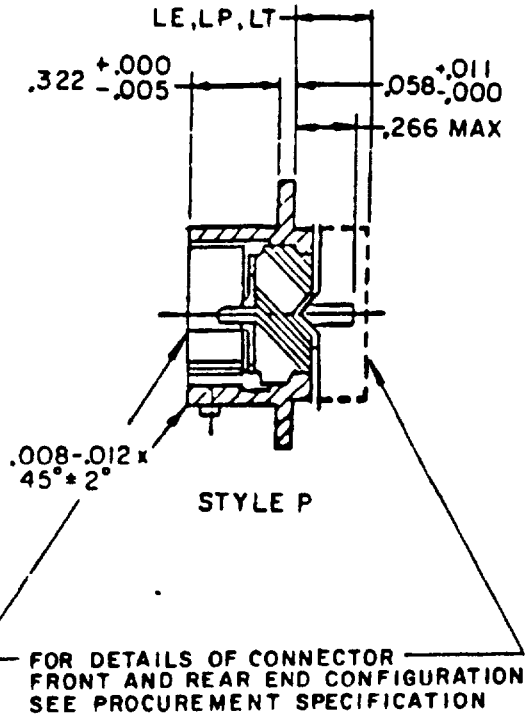

FOR DETAILS OF CONNECTOR
FRONT AND REAR END CONFIGURATION
SEE PROCUREMENT SPECIFICATION

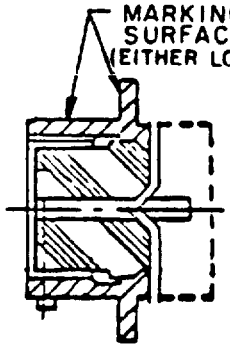

STYLE S

1/ Class E inactive for new design

2/ Class P inactive for new design for Air Force.

EXAMPLE OF PART NUMBER

MS27472 T 24 F 61 P A

MS NO	CLASS	SHELL SIZE	FINISH (COLOR)	INSERT ARR NUMBER	STYLE (P OR S)	POLARIZATION NO LETTER REQUIRED FOR NORMAL

G FOR CHANGES SEE SHEETS 1 & 2

P A AF-85 Other Cust ARMY-CR NAVY-AS	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, CRIMP TYPE BAYONET COUPLING, SERIES II	MILITARY STANDARD MS27472
Procurement Specification MIL-C-38999		SUPERSEDES: MS27472 (USAF)	SHEET 1 OF 2

DD FORM 1 SEP 83 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-3367-3

APPROVED 8 SEP 66 REVISED (E) 13 AUG 74 (F) 2 JAN 1976, (G) 15 JUNE 1984

Reviewer activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

User activities: Army -
Navy -
Air Force -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Class E, 1/ T and P 2/

Ⓖ

SHELL SIZE	LE MAX LENGTH	LP MAX LENGTH	LT MAX LENGTH
8	.562	641	391
10			
12			
14			
16			
18			
20			
22			
24		703	469

SHELL SIZE	R BSC	S MAX	T +.010 -.005
8	.297	.828	120
10	.3595	954	
12	406	1 047	
14	.453	1.141	
16	4845	1 234	
18	531	1 328	
20	578	1 453	
22	625	1 578	
24	6875	1.703	147

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
005	13	266	6 76	625	15 88	1 391	35 33
007	18	297	7 54	641	16 28	1 453	36 91
008	20	322	8 18	6875	17 46	1 516	38 51
010	25	3595	9 13	703	17 86	1 578	40 08
011	28	391	9 93	828	21 03	1 641	41 68
012	30	406	10 31	954	24 23	1 703	43 26
015	38	453	11 51	1 047	26 59	1 766	44 86
058	1 47	469	11 91	1 078	27 38	1 891	48 03
120	3 05	.4845	12 31	1 141	28 98	2 016	51 21
139	3 53	531	13 49	1 234	31 34	2 204	55 98
.147	3 73	562	14 27	1 266	32 16		
223	5 66	578	14 68	1 328	33 73		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For main keyway and keyway positions, see MIL-C-38999.
4. For design feature purposes this standard takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on date of invitations for bid.
6. The gage feature for GG shall be .010 (.25 mm) smaller than the MMC size at basic location.

APPROVED 8 SEP 66 REVISED 15 JUNE 1984 Ⓖ FOR CHANGES SEE SHEETS 1 & 2

P A. AF-85
Other Cust ARMY-CR NAVY-AS
International Interest
TITLE CONNECTOR, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, CRIMP TYPE BAYONET COUPLING, SERIES II
MILITARY STANDARD
MS27472
Procurement Specification MIL-C-38999
SUPERSEDES:
SHEET 2 OF 2
DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA - ES

User activities: Army -
Navy -
Air Force -

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.