This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES


User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


P.A AF-85
Other Cust ARMY-CR NAVY-AS
Procurement Specification MIL-C-38999
International Interest
SUPERSEDES: MS27510(USAF)
TITLE COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II (E)
MILITARY STANDARD
MS27510
PAGE 1 OF 3


(E) Denotes Changes

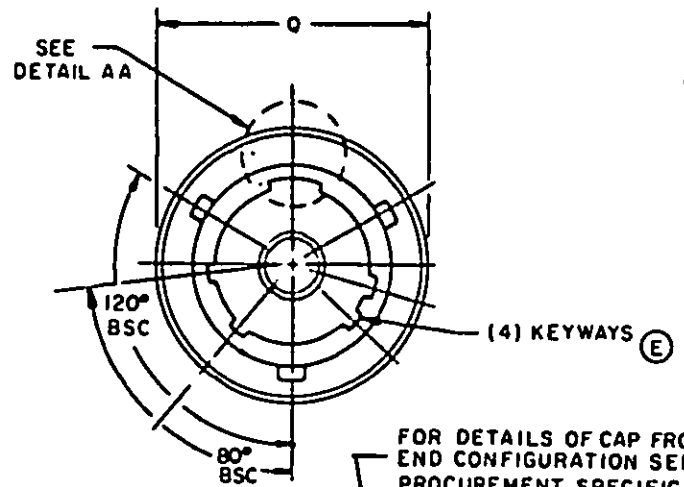

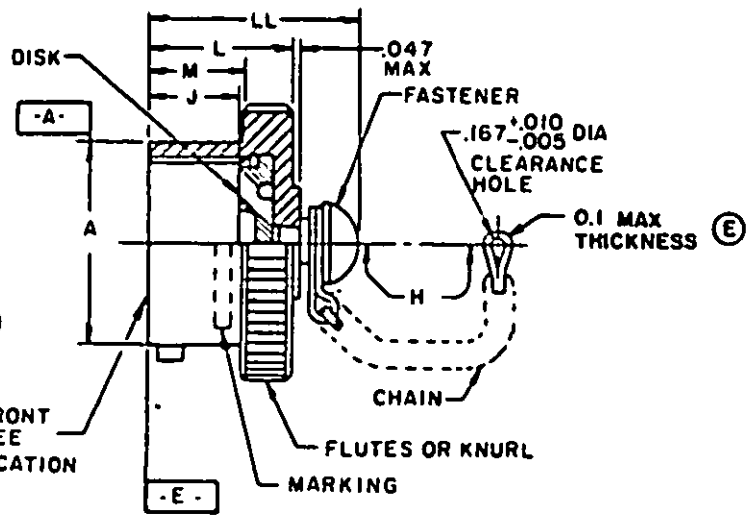

FOR DETAILS OF CAP FRONT END CONFIGURATION SEE PROCUREMENT SPECIFICATION

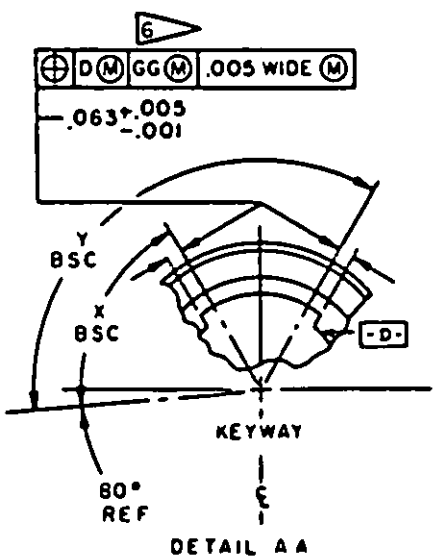

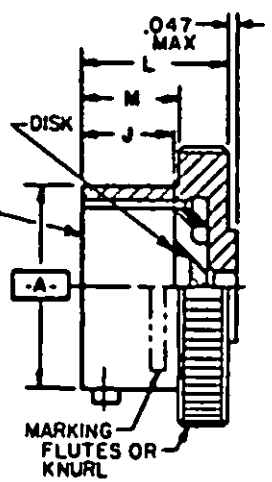

STYLE A

STYLE C

EXAMPLE OF PART NUMBER

MS27510 A 10 C L

MS27510	A	10	C	L
MS NO	FINISH	SHELL SIZE	STYLE C-CHAIN A-WITHOUT CHAIN	LENGTH L-5.00 CHAIN IN LIEU OF STD LENGTH

(TOLERANCE + .500 - .250)

M - 6.00 CHAIN IN LIEU OF STD LENGTH

N - 7.00 CHAIN IN LIEU OF STD LENGTH

FED. SUP CLASS 5935

APPROVED 27 DEC 77 REVISED (E) 23 OCT 84

5935-3449

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A AF-85
Other Cust ARMY-CR NAVY-AS
International Interest
Procurement Specification MIL-C-38999
SUPERSEDES:
TITLE
COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II (E)
MILITARY STANDARD
MS27510
PAGE 2 OF 3
FED. SUP CLASS 5935

Shell Size	A +.001 -.005 DIA	H +.500 -.250 Std Chain Length	J +.015 -.010	L MAX	M MIN	Q MAX DIA	X BSC DEG	Y BSC DEG	LL MAX
8	.473	3.00	.222	.57	.31	.72	82°	118°	.82
10	.590					.85	72°	128°	
12	.750	3.50				1.00	68°	132°	
14	.875					1.13	66°	134°	
16	1.000					1.25	70°	130°	
18	1.125					1.38			
20	1.250	4.00				1.50			
22	1.375					1.63	74°	126°	
24	1.500					1.75			

APPROVED 27 DEC 77 REVISED (E) FOR CHANGES SEE PAGES 1, 2 AND 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - MI, AR
Navy - EC, MC, OS
Air Force - 11, 15, 17, 99
DLA-ES

User activities: Army -
Navy -
Air Force -

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

P.A AF-85

Procurement Specification: MIL-C-38999

Other Cust: ARMY-CR NAVY-AS

International Interest:

SUPERSEDES:

TITLE: COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING, SERIES II (E)

MILITARY STANDARD

MS27510

PAGE 3 OF 3

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.31	7.9	.875	22.22	1.75	44.4
.005	.13	.473	12.01	1.00	25.4	3.00	76.2
.010	.25	.500	12.70	1.125	28.58	3.50	88.9
.015	.38	.57	14.5	1.13	28.7	4.00	101.6
.047	1.19	.59	15.0	1.25	31.8	5.00	127.0
.063	1.60	.72	18.3	1.375	34.92	6.00	152.4
.167	4.24	.75	19.0	1.38	35.1	7.00	177.8
.222	5.64	.82	20.8	1.50	38.1		
.25	6.4	.85	21.6	1.63	41.4		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Material - Cap: Impact extruded or machined aluminum alloy.
   Disk: Silicone elastomer.
   Chain: Stainless steel, passivated, conforming to RR-C-271, type II, class 3.
   Fastener: Stainless steel, passivated.
4. Finish - See MIL-C-38999.
5. BSC dimensions apply at maximum material condition (MMC).
6. The gage features for GG shall be .004 (0.10 mm) smaller than the MMC size at basic location.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
8. Referenced documents shall be of the issue in effect on date of invitation for bid.
9. Applicable connectors: MIL-C-27599 and MIL-C-38999.
10. Fastener tensile strength shall be 5 pounds.

FED. SUP CLASS 5935

APPROVED 27 DEC 77 REVISED (E) FOR CHANGES SEE PAGES 1,2 AND 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.