FED SUP CLASS
5340

FAST PIN

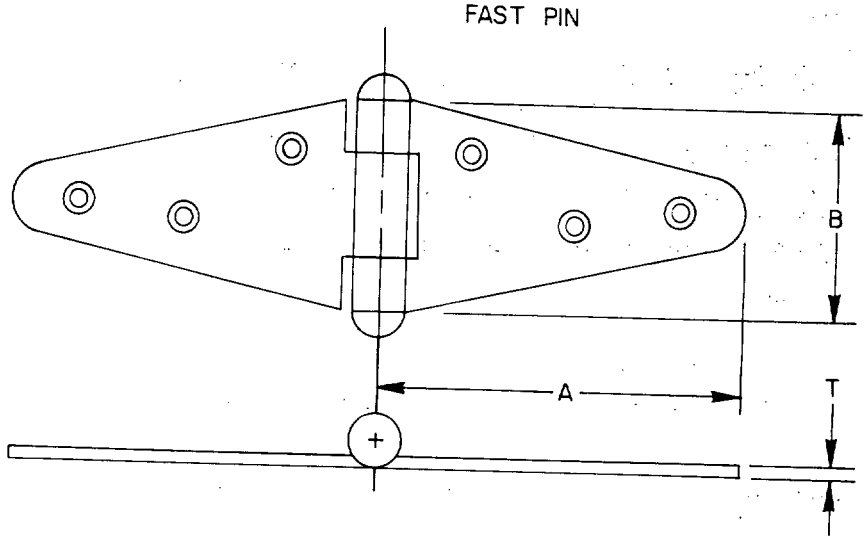


TABLE I. DASH NUMBER AND DIMENSIONS

DASH NUMBER	LENGTH CLOSED A	WIDTH AT JOINT B	THICKNESS MIN T	NUMBER OF SCREW HOLES	SIZE 1/ OF SCREWS (REF)
LIGHT					
-2	2.00	1.00	.058	6	#5 X 5/8
-3	3.00	1.09	.065	6	#6 X 3/4
-4	4.00	1.19	.074	6	#7 X 3/4
-5	5.00	1.34	.083	8	#8 X 3/4
-6	6.00	1.56	.089	8	#9 X 7/8
-8	8.00	1.87	.101	8	#10 X 1
-10	10.00	2.09	.104	8	#10 X 1-1/4
HEAVY					
-20	4.00	1.56	.080	6	#9 X 7/8
-22	6.00	2.50	.115	8	#10 X 1-1/4
-24	8.00	3.19	.125	8	#12 X 1-1/4
-26	10.00	3.62	.139	8	#14 X 1-1/2
-28	12.00	4.50	.156	10	#16 X 1-1/2
-30	14.00	4.75	.156	10	#16 X 1-1/2

1/ SEE NOTE 1.

Ⓑ ENTIRE STANDARD REVISED

APPROVED 24 FEB 61 REVISED Ⓑ 21 DEC 87

USER ACTIVITIES:
ARMY — AV, ME
NAVY — MC

REVIEWER ACTIVITIES:
ARMY — EA, GL
NAVY — SH
AIR FORCE — 82
DLA — IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY — AR Other Cust NAVY — YD AIR FORCE-99		HINGE ,STRAP	MS27972
PROCUREMENT SPECIFICATION ANSI-A156.2	SUPERSEDES: SHDX1, SHDX2, MQ125A		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1725

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:54Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

REQUIREMENTS:

1. MATERIAL:
   BODY: STEEL, IN ACCORDANCE WITH ASTM A506, LOW CARBON, COLD ROLLED
   PIN: BRASS, IN ACCORDANCE WITH QQ-B-626, COMPOSITION 11, HARD OR CORROSION RESISTANT
   STEEL, IN ACCORDANCE WITH ASTM A666.

2. PROTECTIVE COATING: ZINC COATED IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn 13 OR MIL-C-81562, TYPE II, CLASS 2.

3. TOLERANCE: SLIGHT VARIATION IN DIMENSIONS TO CONFORM TO MANUFACTURER'S PATTERNS IS PERMISSIBLE.

4. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I.

   EXAMPLE: MS27972-2
   - DASH NUMBER
   - BASIC MS NUMBER

   MS27972-2 INDICATES: HINGE, STRAP, STEEL; LENGTH CLOSED, 2.00; WIDTH AT JOINT, 1.00; THICKNESSK, .058.

NOTES:

1. SCREWS: HINGES ARE FURNISHED WITH WOOD SCREWS. THE SIZES SPECIFIED ARE THOSE NORMALLY FURNISHED BY THE SUPPLIER.

2. ALL DIMENSIONS ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.

3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THEEXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY – AV, ME
NAVY – MC

REVIEWER ACTIVITIES:
ARMY – EA, GL
NAVY – SH
AIR FORCE – 82
DLA – IS

APPROVED 24 FEB 61 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY – AR Other Cust NAVY – YD AIR FORCE-99		HINGE ,STRAP	MS27972
PROCUREMENT SPECIFICATION ANSI–AI56.2	SUPERSEDES: SHDXI, SHDX2, MQI25A		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1725

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:54Z
Check the source to verify that this is the current version before use.