INCH-POUND

MS28041H
24 August 2010
SUPERSEDING
MS28041G
11 July 1988

DETAIL SPECIFICATION SHEET

INDICATOR, TURN AND SLIP, 28V DC, 1-7/8 INCH DIAL

Inactive for new design after 15 March 1996.


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-7627, "Indicator, Turn and Slip, 28V DC".

REQUIREMENTS:

This specification implements STANAG 7140. When amendment, revision, or cancellation of this specification is proposed, the preparing activity must coordinate the action with the U.S. National Point of Contact for the international standardization agreement, as identified in the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.

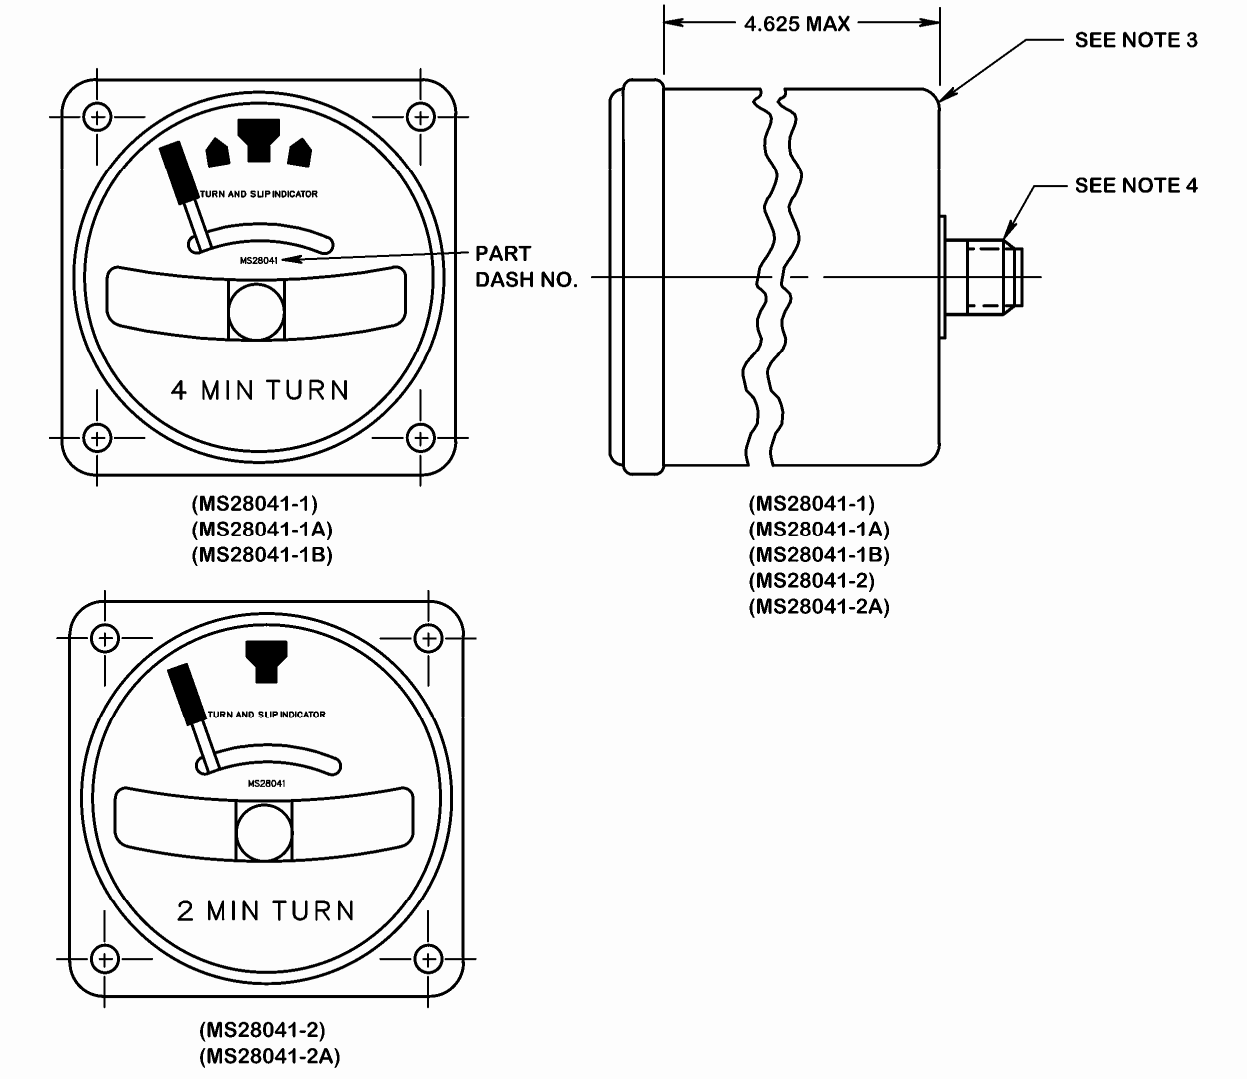


MS part no.	Sensitivity	Ball color	Case	Color of dial marking
MS28041-1	4 min turn	Dark	Hermetical	Fluorescent
MS28041-1A	4 min turn	White		Lusterless white
MS28041-1B	4 min turn	Dark		Lusterless white
MS28041-2	2 min turn	Dark		Lusterless white
MS28041-2A	2 min turn	White		Fluorescent

NOTES:
1. All dimensions are in inches.
2. For design feature purposes, this document takes precedence over documents referenced herein.
3. Hermetically sealed case shall be in accordance with MS33638.
4. Hermetically sealed receptacle shall be in accordance with MS33678 10SL-3P.
5. All cases shall be hermetically sealed.
6. Dial and pointer shown for reference only. For additional details, see procurement specification.

FIGURE 1. Indicator, turn and slip, 28V DC, 1-7/8 inch dial.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.

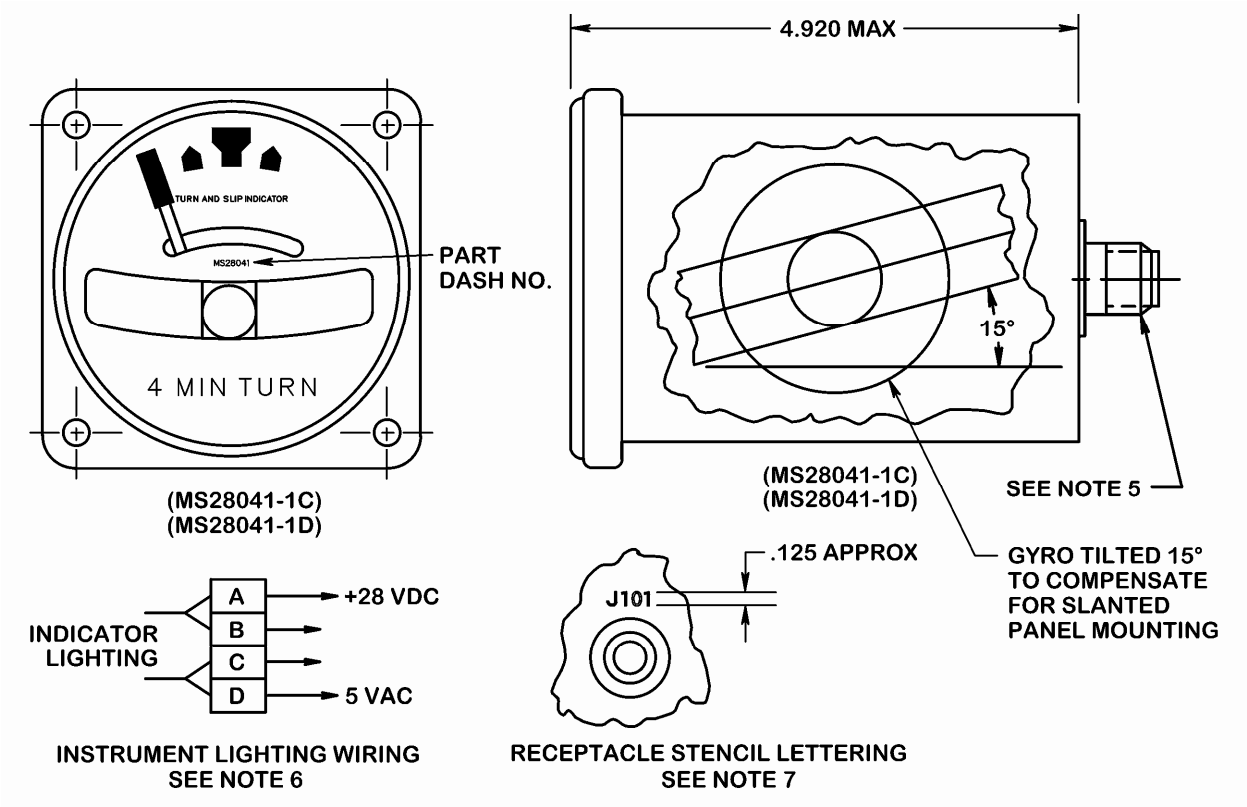

MS part no.	Sensitivity	Ball color	Case	Color of dial marking
MS28041-1C	4 min turn	Dark	Hermetical	Fluorescent
MS28041-1D	4 min turn	Dark		Lusterless white

NOTES:
1. All dimensions are in inches.
2. For design feature purposes, this document takes precedence over documents referenced herein.
3. Hermetically sealed case shall be in accordance with MS33638.
4. All cases shall be hermetically sealed.
5. Hermetically sealed receptacle shall mate with Amphenol 67-06P14-5S or equivalent.
6. Indicator lighting shall be in accordance with MIL-L-25467.
7. Stencil lettering shall utilize insignia white acrylic lacquer color ANA 601 with silk screen.
8. Dial and pointer shown for reference only. For additional details, see procurement specification.

FIGURE 2. Indicator, turn and slip, 28V DC, 1-7/8 inch dial, slanted panel mount.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - AV
Navy - AS
Air Force - 99
DLA - GS

Review Activity:
Air Force - 71

Preparing Activity:
DLA - GS1

(Project 6610-2010-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:55Z
Check the source to verify that this is the current version before use.