FED. SUP CLASS
5935

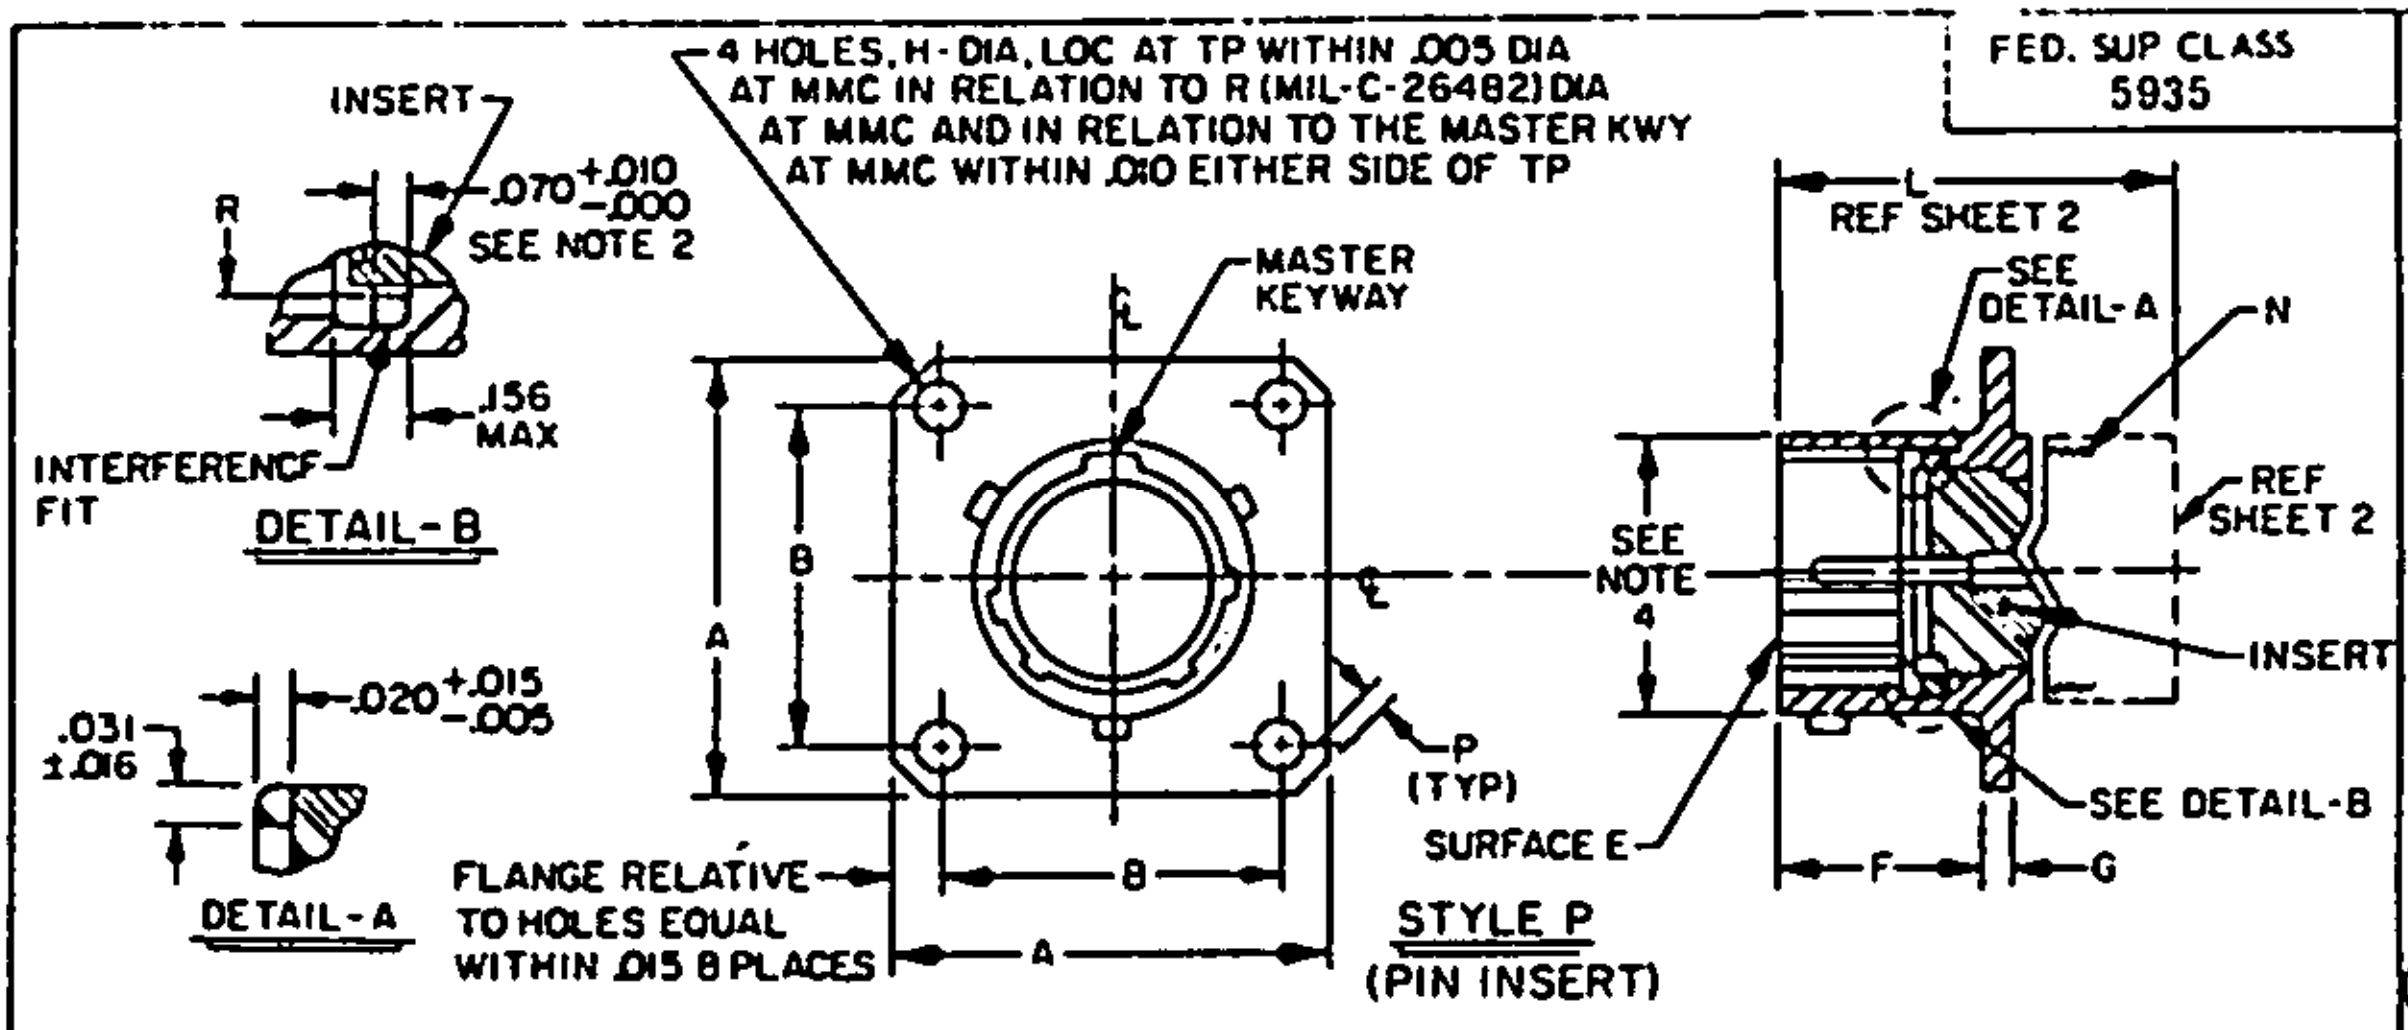

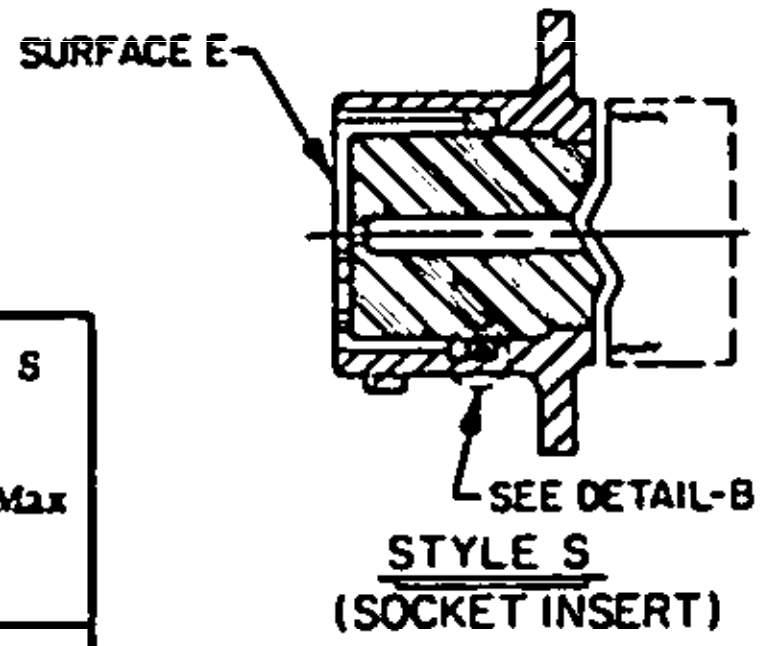

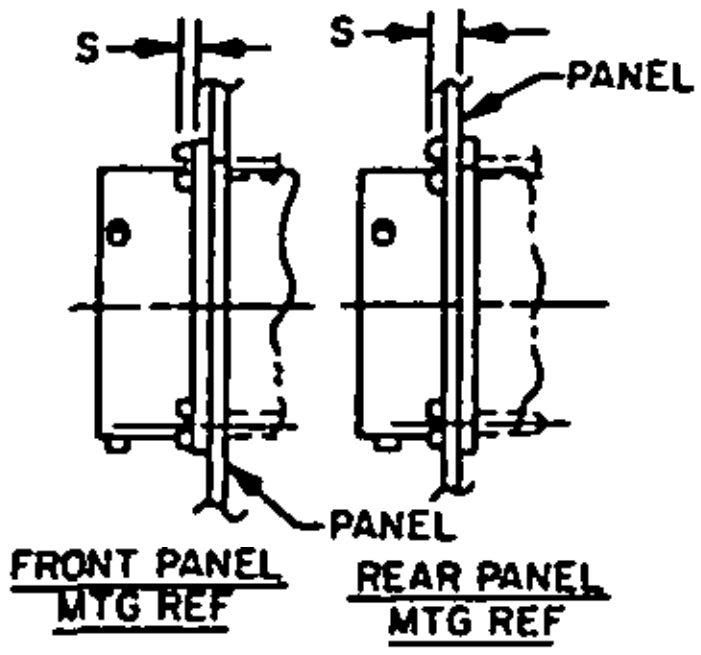

Classes E, F, J and P receptacles

Size	A Max length side	B (TP) Mtg holes	F +.031 −.000 Mtg flange location	G ±.016 Thk mtg flange	H +.005 Dia mtg holes	N UNEF-2A accessory thread	P Min edge dist	R Max ID gasket	S Max
8	.828	.594	.431	.062	.120	.4375-28	.035	.329	.087
10	.954	.719				.5625-24		.457	
12	1.047	.812				.6875-24		.564	
14	1.141	.906				.8125-20		.689	
16	1.234	.969				.9375-20		.814	
18	1.328	1.062				1.0625-18		.907	
20	1.453	1.156	.556	.094		1.1875-18	.050	1.039	.212
22	1.578	1.250				1.3125-18		1.164	
24	1.703	1.375	.589		.147	1.4375-18		1.289	

NOTES:

1. Dimensions are in inches.
2. Packing material shall meet the requirements of MIL-STD-417.
3. True position (TP) tolerances specified are in accordance with ANSI Y14.5-1973.
4. Intermateability dimensions shall be in accordance with MIL-C-26482.
5. For insert arrangements see MIL-STD-1669.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.
8. Example of part number:

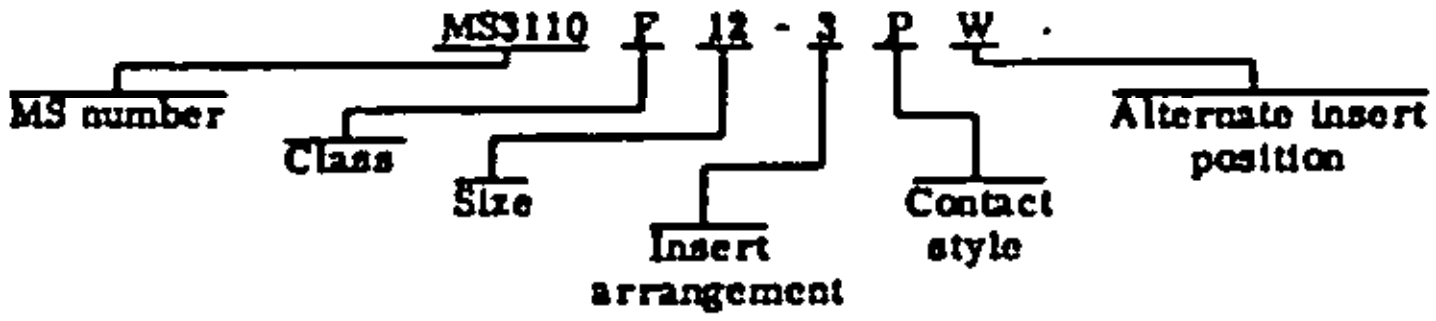

9. NOT FOR AIR FORCE USE. USE MS3470.

Ⓓ FOR CHANGES SEE SHEET 2

User activities: Army AV
Navy
Air Force

Reviewer activities: Army EL, MI, MU
Navy EC, SH
Air Force 11, 17

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 14 May 59
REVISED Ⓐ 24 Aug 62 Ⓑ 15 Feb 67 Ⓒ 5 SEPT 1975 Ⓓ 19 Aug 76

P.A Navy - AS

International interest

Other Cust
Army - EL
AF - 85

Procurement Specification
MIL-C-26482

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC,
SERIES 1, SOLDER TYPE, WALL MOUNTING,
FLANGE, BAYONET COUPLING

SUPERSEDES:

MILITARY STANDARD

MS 3110

SHEET 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T12:58Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army EL, MI, MU
Navy EC, SH
Air Force 11, 17

User activities: Army AV
Navy
Air Force



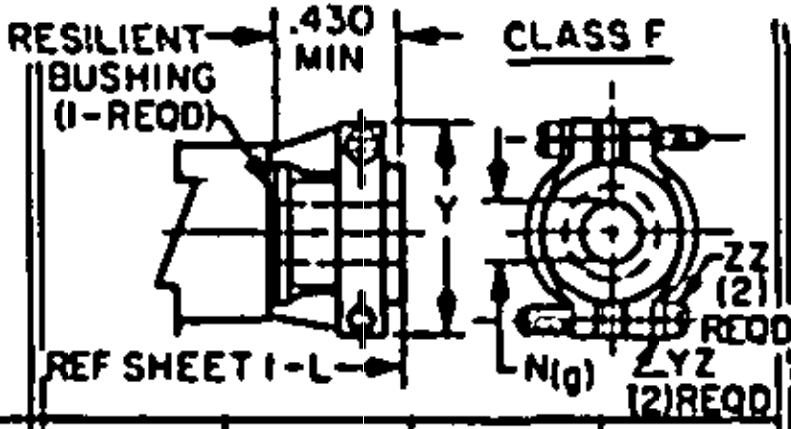

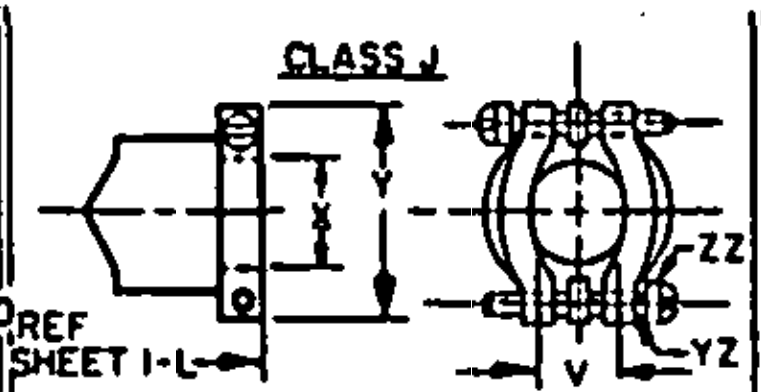

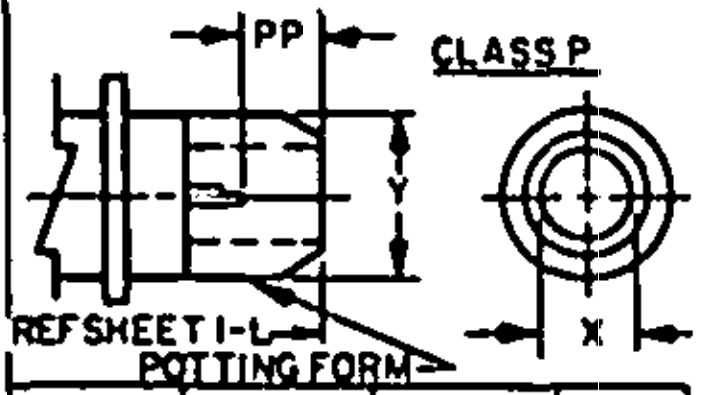

Ⓓ

SIZE	L	X	Y	L	X	Y	V	L	V	X ID GLAND SEAL		Y	L	X	Y	PP
	MAX OVER-ALL LENGTH	DIA MIN ID	DIA MAX OD	MAX OVER-ALL LENGTH	DIA MIN OPEN	MAX	MAX CLOSED	MAX OVER-ALL LENGTH	MAX CLOSED	MIN. RANGE CLOSED	MIN. RANGE OPEN	DIA MAX	MAX OVER-ALL LENGTH	DIA MIN	DIA MAX	MIN
8	1.328	.259	.608	1.922	.734	.828	.187	2.271	.157	.160	.230	.828	1.653	.327	.608	.750
10		.359	.734		.797	.891	.187		.187	.205	.318	.891		.434	.734	
12		.469	.858		.622	1.016	.281	2.411	.281	.318	.462	1.016		.548	.858	
14		.589	.984		.547	1.141	.325	2.599	.325	.416	.539	1.141		.673	.984	
16		.727	1.110	2.047	.609	1.203	.356	2.943	.356	.550	.616	1.203		.798	1.110	
18		.779	1.234	2.078	.734	1.469	.456	3.172	.456	.600	.672	1.469		.899	1.234	
20	1.531	.901	1.360	2.344			.519	3.610	.519	.635	.787		1.672	1.024	1.360	
22		1.009	1.484		.922	1.656		3.766		.670	.866	1.656		1.149	1.484	
24	1.594	1.123	1.610	2.406	.984	1.750	.657	3.985	.657	.760	.854	1.750	1.734	1.274	1.610	

Size		N (g) ±.010 FREE DIA	ZZ SCREW THREADS	YZ LOCKWASHERS AN935 OR AN936 TYPES (h)
8		.125	6-32UNC	AN935 B6L OR -6L AN936-A6B OR -A6
10		.188		
12		.312		
14		.375		
16		.500		
18		.625	8-32UNC	AN935 B8L OR -8L AN936-A8B OR -A8
20		.625		
22		.750		
24		.800		

DIMENSIONS WITH BUSHING REMOVED

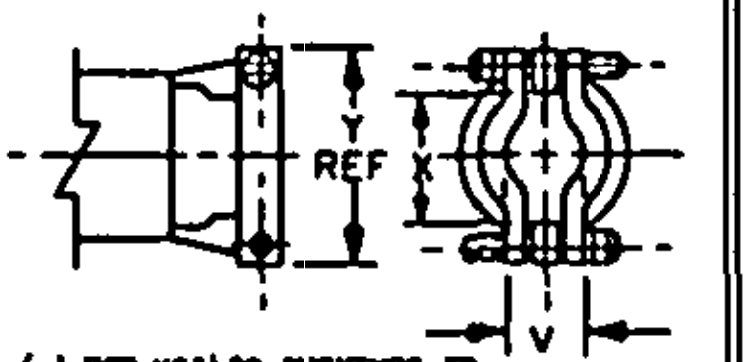

(g) USE MS3420 BUSHINGS IF REDUCED OPENING IS REQUIRED

(h) LOCKWASHERS MAY BE CAPTIVE

FED. SUP CLASS
5935

APPROVED 14 May 59 REVISED Ⓒ Entire standard revised Ⓓ FOR CHANGES SEE SHEET 2

P.A. Navy - AS

Other Cust
Army - EL
AF - 85

International interest

Procurement Specification
MIL-C-26482

TITLE
CONNECTORS, RECEPTACLE, ELECTRIC, SERIES 1, SOLDER TYPE, WALL MOUNTING, FLANGE, BAYONET COUPLING

SUPERSEDES:

MILITARY STANDARD

MS 3110

SHEET 2 OF 2

DD FORM 1 SEP 63 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-2070-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.