
AREA MEDC
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

USER ACTIVITIES: ARMY - MD, EM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
AIR FORCE - 82

FED. SUP CLASS
6640

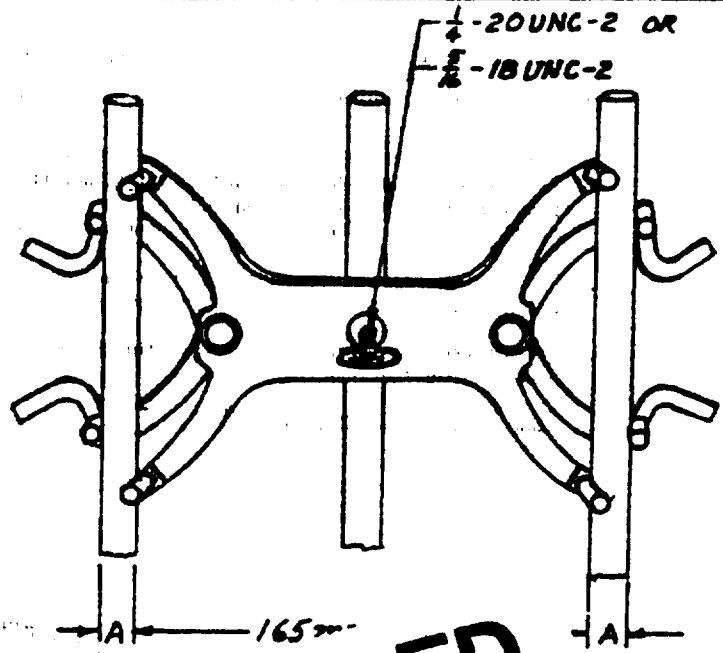

CANCELLED
CANCELLED AFTER 29 OCT 1991
NO SUPERSEDING STANDARD

PART	BURET SIZES ACCOMMODATED (mL)
	Micro to 100

MATERIAL: ...oy in accordance ...ASTM B80 or zinc-base alloy in ...-Z-363, Composition A.

...ronze in accordance with Federal Specification ...position A or corrosion-resisting steel in accordance ... specification QQ-S-763, Class 202 or 302.

Sleeves shall be of rubber in accordance with MIL-STD-417, Type R or plastic formed by hot dipping the clamp jaw in a vinyl plastisol conforming to Military Specification MIL-P-20689, Type II or high quality non-raveling asbestos yarn.

Thumbscrew shall be forged aluminum in accordance with Federal Specification QQ-A-367, Composition 2017 or chemical resisting zinc alloy. Zinc-base alloy clamps and clamp holders may have copper alloy fittings in accordance with Federal Specification QQ-C-523 or QQ-C-525.

DESIGN: Holder shall be constructed of a one piece H-frame with vertical arms curved outward. The ends of each arm shall have a curved finger at right angle to the frame. Two spring actuated gripping arms each with a curved finger at right angle to the arm shall be attached to each side of the H-frame and aligned with the curved frame arms to form double clamps. Each side of the holder shall operate separately. Holder shall have a finger type clamp jaw to accommodate the buret and a V type holder jaw to accommodate a maximum of 11/16 inch diameter support rod.

(D) CANCELLATION

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 9 Dec 1975 (C) 4 OCT 1983 (D) 29 OCT 1991

P.A.	EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MS 99		HOLDER, BURET, DOUBLE	MS36017
Procurement Specifications: MMM-C-460		SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. CANCELLATION

Project Number 6640-1740-05

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6640

Threads shall be in accordance with Federal Handbook H28, Unified National Coarse Thread Series. Thumbscrew shall have 25 to 38 mm of thread.

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 20512, 22527, and 59728.

CANCELLED
CANCELLED AFTER 29 OCT 1991
NO SUPERSEDING STANDARD

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive ordering must be made from this document.

REVISED

APPROVED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust			MS36017
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE Project Number 8840-1740-05

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.