
FED. SUP CLASS
6640

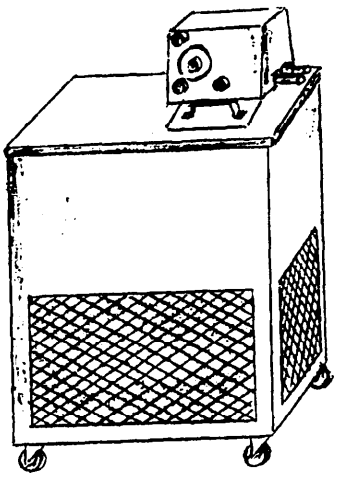

MATERIAL: The bath shall have a stainless steel top and tank. All other components shall be made of materials that will function as required for reliable service.

DESIGN: The bath shall be housed in a single console which contains an air cooled compressor system and a four gallon stainless steel tank with foamed polyurethane insulation. The refrigeration coils, heater, pump and control sensor are located to the rear of the bath tank leaving a work space of 17.8 x 14.3 x 22.8 cm deep. The console shall have a stainless steel top and tank cover.

Specifications are as follows:

Temperature range: +10 to -80°C
Control stability: ±0.03°C
Cooling ability: at +10°C: 600 watts 516 Kcal/hr.
at -70°C: 300 watts 258 Kcal/hr.
Pumping ability: (water, 0-head); continuously adjustable to 13 Lpm
Volume: 15.1 L
Dimensions: 68.6 cm wide x 46.9 cm deep x 95.2 cm high
Power: 208/230 volts, 60Hz single phase, 18 amp.

All electrical components shall conform to the standards of Underwriters Laboratories, Incorporated.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 82

APPROVED 30 JUN 1983 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA / Other Cust MS 99	INTERNATIONAL INTEREST	TITLE: CIRCULATOR, LOW TEMPERATURE BATH	MILITARY STANDARD MS36412
Procurement Specifications: NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1181

Source: https://assist.dla.mil -- Downloaded: 202640-23T17:40Z
Check the source to verify that this is the current version before use.