INCH-POUND


MS39133J
7 October 2019
SUPERSEDING
MS39133H
28 April 2015

DETAIL SPECIFICATION SHEET

ADAPTER, STRAIGHT, PIPE TO HOSE-AUTOMOTIVE AIR BRAKE HOSE

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

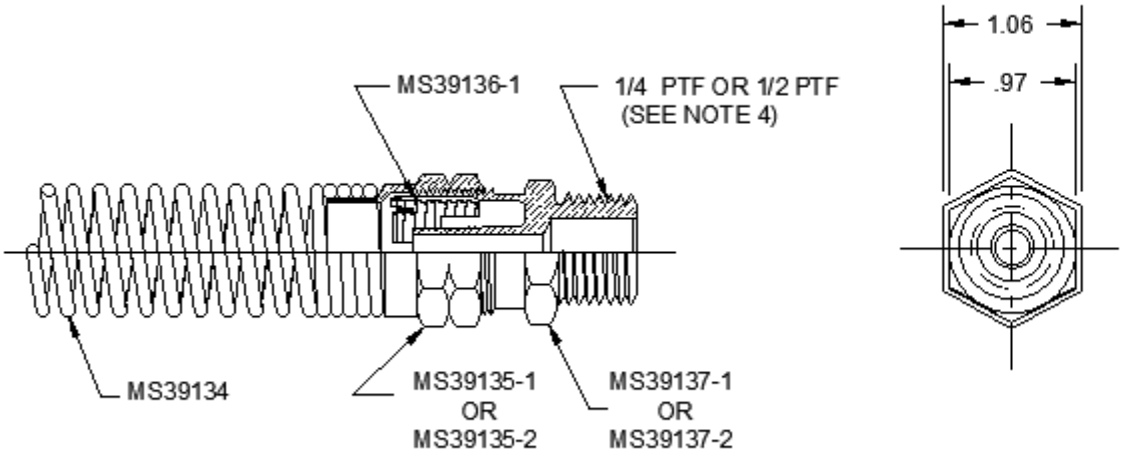

Inches	mm
0.97	24.64
1.06	26.92

MS dash number	Pipe end thread
-1	1/4 PTF
-2	1/2 PTF


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All dimensions are “reference” dimensions.
4. For design feature purposes, this document takes precedence over acquisition documents referenced herein.
5. Male PTF (Short Dryseal) are identical to male NPTF threads except that the thread lengths have been shortened by one full thread from the small end of the taper.

FIGURE 1. Pipe to hose adapter.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

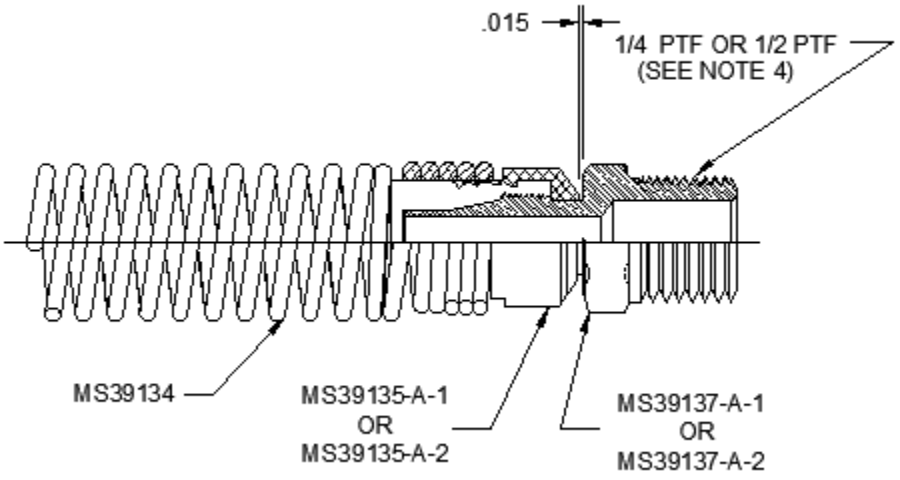

Inches	mm
0.15	0.38

MS dash number	Pipe end thread
-A-1	1/4 PTF
-A-2	1/2 PTF

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All dimensions are “reference” dimensions.
4. Male PTF (Short Dryseal) are identical to male NPTF threads except that the thread lengths have been shortened by one full thread from the small end of the taper.

FIGURE 2. Alternate design, pipe to hose adapter.

REQUIREMENTS:

Adapters shall be specified on figures 1, 2 and in table I.

MS39133 adapter assemblies, of a given Part or Identifying number (PIN), consisting of MS39135 and MS39137 parts shall be manufactured of the same type materials and finishes.

The adapters described herein are for use with MS39325 hose assemblies.

Material:

Brass formed rod, tempered, half-hard brass in accordance with ASTM B16/B16M.

Steel bar in accordance with ASTM A108.

Corrosion resistant steel bars UNS S30300, UNS S30400, UNS S30403, UNS S32100, or UNS 35500.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

Material/finish shall be in accordance with table I.


TABLE I. Material/finish

Material/finish designator	Material/	Finish
A	Stainless steel	No additional finish. Passivation in accordance with SAE AMS2700, type 6 or 7.
B	Brass	No additional finish.
C	Steel	Cadmium plated in accordance with SAE AMS-QQ-P-416, type II, class 2 or SAE AMS-C-81562, type II, class 2. 1/ 2/ 3/
R	Steel	Zinc plating with colorless passivate in accordance with ASTM B633, type V, Fe/Zn 5.
S	Steel	Zinc plated in accordance with ASTM B633, type II, Fe/Zn 5. 1/ 3/

1/ These finishes have a chromate conversion coating or chromic acid rinse, which includes hexavalent chromium, and are not recommended.
2/ Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.
3/ The use of cadmium plating or coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicated stated in the contract as a requirement.

All plating's shall be capable of meeting 96-hour salt spray test in accordance with ASTM B117. The fittings shall show no evidence of red corrosion after 96 hours of salt spray. Air passages, other openings, and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.


PIN for figure 1 adapter.

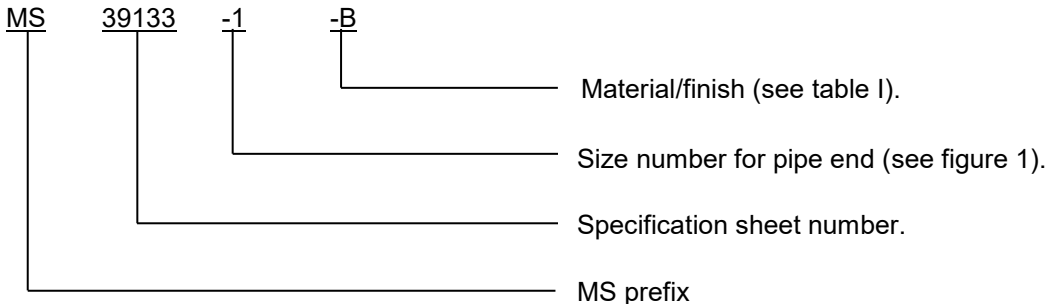

Example of a PIN: MS39133-1-B indicates an adapter, straight, pipe to hose made of brass, with 1/4 PTF pipe threads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

PIN for figure 2, alternate design adapter:

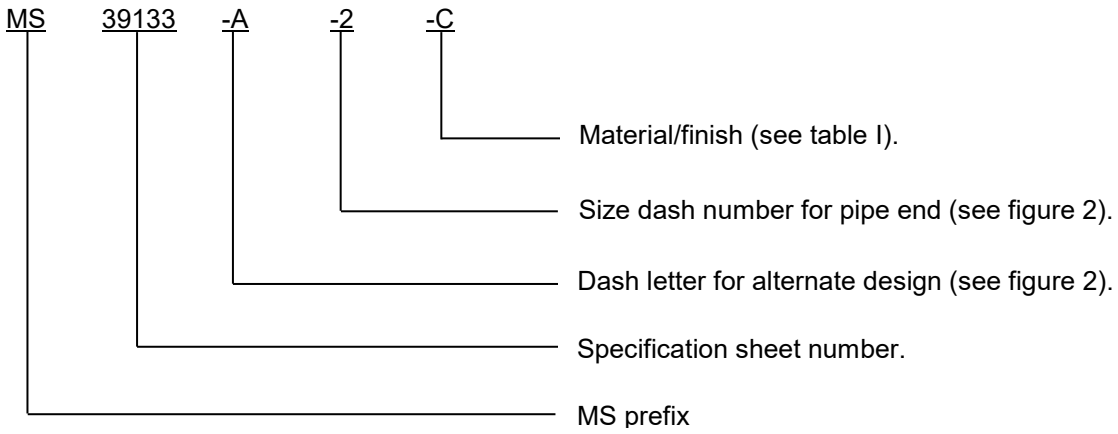

PIN example, alternate design: MS39133-A-2-C indicates an alternate design adapter made of steel, cadmium plated with 1/2 NPTF pipe threads.

Class I and II ozone depleting substances (ODS) shall not be used in MS39133 or any referenced procedures.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.

The use of cadmium plating or coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicated stated in the contract as a requirement.

In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. This document references the following:

MS39134	ASTM B117
MS39135	ASTM B633
MS39136	SAE AMS-C-81562
MS39137	SAE AMS-QQ-P-416
MS39325	SAE AMS2700
ASTM A108	T9070-AL-DPC-020/077-2
ASTM B16/B16M	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2019-071)

Review activities:
Army - AR, EA
Navy - SA

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:46Z
Check the source to verify that this is the current version before use.