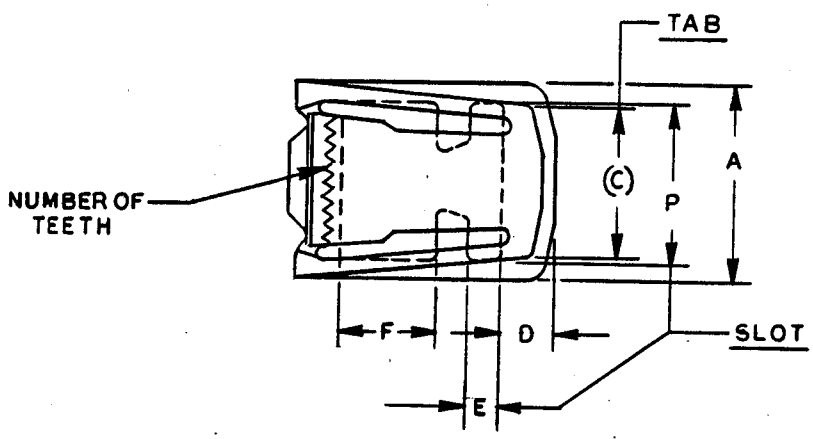
FED. SUP CLASS
5340



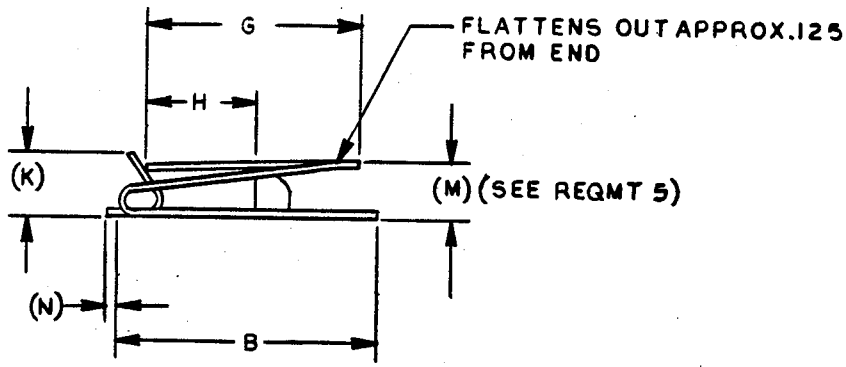


TABLE I BUCKLE DIMENSIONS AND DASH NUMBERS

DASH NO	STRAP SIZE	A	B	(C)	D	E	F	G	H	(K)	(M)	(N)	P	NO OF TEETH
3	.750	1.031	1.234	.812	.203	.156	.359	1.078	.500	.375	.359	—	.781	8
4	1.000	1.312	1.906	1.000	.328	.312	.546	1.656	.718	.468	.437	.062	1.031	9

APPROVED 12 OCT 86 REVISED

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document., when applicable.

Review Activities: Army-AT, AV, ER, GL, ME, MI DLA-IS

User Activities: Army- CR Navy- MC

P. A. AR / Other Cust OS 99	INTERNATIONAL INTEREST	TITLE: BUCKLE, CLAMP STYLE, ONE PIECE WITH TONGUE	MILITARY STANDARD MS 51550
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		PAGE 1 OF 2

AMSC N/A DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340—1716

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5340

REQUIREMENTS:-

1. MATERIAL: STEEL, CARBON, GRADES 1050 THRU 1074 IN ACCORDANCE WITH ASTM A568.

2. PROTECTIVE FINISH: ZINC COATING SHALL BE IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS Fe/Zn5, CADMIUM PLATING SHALL BE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 3.

3. HARDNESS: HARDNESS SHALL BE 45-48 HRC.

4. PULL CAPABILITY: THE BUCKLE SHALL BE CAPABLE OF WITHSTANDING A TENSION LOAD OF 150 POUNDS MINIMUM FOR DASH NO. 3 AND 250 POUNDS MINIMUM FOR DASH NO. 4 WHEN TESTED WITH NYLON WEBBING CONFORMING TO MIL-N-43668, TYPE III (1 INCH) FOR DASH NO. 4 AND TYPE IV (.75 INCH) FOR DASH NO. 3.

5. OPENING FORCE: THE INITIAL FORCE REQUIRED TO OPEN THE BUCKLE TO RELEASE NYLON WEBBING CONFORMING TO MIL-W-43668 SHALL NOT EXCEED 1.5 POUNDS FOR DASH NO. 3 AND SHALL NOT EXCEED 2 POUNDS FOR DASH NO. 4.

6. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER PLUS A DASH NUMBER TAKEN FROM TABLE I AND A CODE LETTER FOR PROTECTIVE FINISH AS APPLICABLE (SEE REQUIREMENT 2 HEREIN).

EXAMPLE: MS51550-3A

- A - CODE LETTER
  - A- CADMIUM PLATE
  - B- ZINC COATING
- 3 - DASH NUMBER
- MS51550 - BASIC MS SHEET NUMBER

MSXXXXX-3A INDICATES- BUCKLE, CLAMP STYLE, ONE PIECE WITH TONGUE, CARBON, STEEL, CADMIUM PLATED, TO ACCOMODATE STRAP SIZE .750, 8 TEETH.

7. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .031.

NOTES:-

1. ALL DIMENSIONS ARE IN INCHES.

2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.

3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

User Activities:
Army- CR
Navy- MC

Review Activities:
Army-AT, AV, ER, GL, ME, MI
DLA-IS

This military standard is approved for use by all Departments And Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 12 OCT 86 REVISED

P. A. AR / Other Cust OS 99	INTERNATIONAL INTEREST	TITLE: BUCKLE, CLAMP STYLE, ONE PIECE WITH TONGUE	MILITARY STANDARD MS51550
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5340-1716

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.