FED SUP CLASS
5310

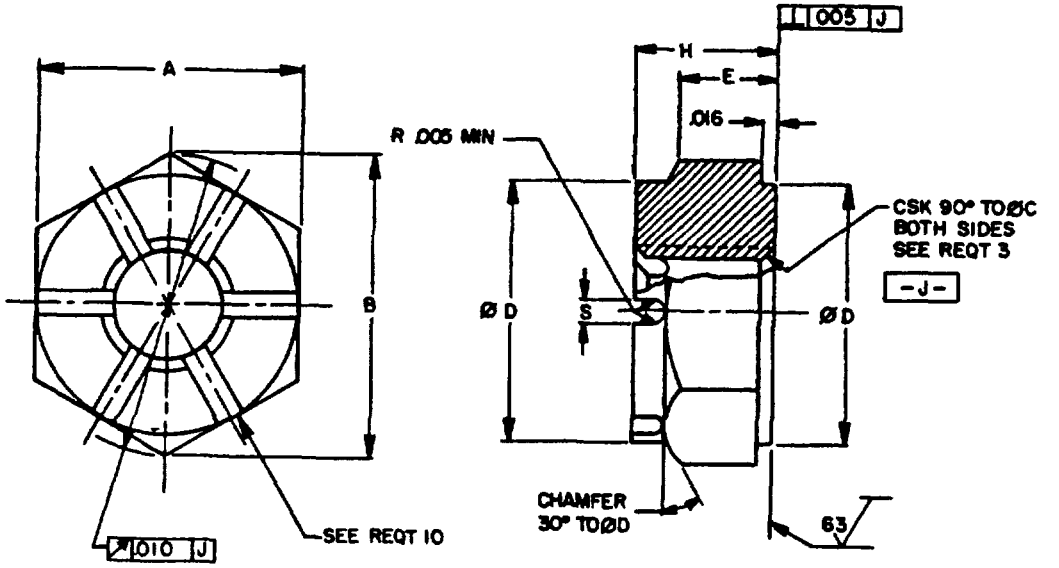


TABLE I DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	THREAD UNJF-3B	A MIN	A MAX	B MIN	ØC 2/	ØD	F 1/	H	G MIN	G MAX	APPROX WEIGHT LB/100
-08	.164-36	.330	.345	.385	.234	.344	.125	.219	.073	.088	.52
-09	.190-32	.367	.378	.419	.200	.375	.150	.250	.073	.088	.56
-10	.250-28	.430	.439	.491	.260	.438	.188	.282	.073	.088	.84
-11	.3125-24	.492	.502	.561	.322	.500	.234	.328	.073	.088	1.25
-12	.375-24	.553	.564	.623	.385	.562	.281	.406	.115	.135	1.73
-13	.4375-20	.679	.690	.775	.448	.688	.328	.454	.115	.135	3.12
-14	.500-20	.741	.752	.840	.510	.750	.375	.562	.115	.135	4.32
-15	.5625-18	.865	.877	.967	.572	.875	.422	.610	.140	.160	7.30
-16	.625-18	.928	.940	1.050	.635	.938	.469	.718	.140	.160	8.50
-17	.750-16	1.052	1.064	1.200	.760	1.062	.562	.812	.140	.160	11.90
-18	.875-14	1.239	1.252	1.414	.885	1.250	.656	.906	.140	.160	18.00
-19	1.000-12	1.427	1.440	1.628	1.010	1.438	.750	1.000	.140	.160	28.57

1/ THIS DIMENSION LOCATES BOTTOM OF SLOTS AND EXTERNAL CHAMFER

2/ FOR SIZES .3125-24 AND SMALLER DRILL "C" DIAMETER FROM SLOTTED SIDE TO DEPTH OF SLOT

APPROVED 26 JUN 63 REVISED (A) 27 MAY 68 (B) 17 JUN 86

(B) ENTIRE STANDARD REVISED

P.A. NAVY-AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY-AV		NUT, CASTELLATED, HEXAGON-A-286, SILVER PLATED	MS9359
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		PAGE 1 OF 2

AMSC N/A DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1526

USER ACTIVITIES: ARMY-ER

REVIEWER ACTIVITIES: ARMY-MI, AIR FORCE-82, 85, DLA-IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document unless applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:15Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5732 OR AMS 5737

2. FINISH: SILVER PLATE IN ACCORDANCE WITH AMS 2410, .0002-.0006 THICK AT THREAD PD. DIMENSIONS SPECIFIED ARE AFTER PLATING.

3. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879.

4. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.

5. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT HEXAGON FACES IN ACCORDANCE WITH ANSI B46.1.

6. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645-B BEFORE PLATING

7 MARKING MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478-79, CLASS C. MULTIPLE MARKING OF BAR STOCK IS PERMISSIBLE PROVIDED POSITIVE IDENTIFICATION IS SHOWN PARTS SHALL BE MARKED BEFORE THREADING DASH NUMBERS MAY APPEAR ON ADJACENT FLATS

8. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.

9. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED

10. OPPOSITE SLOTS OPPOSITE SLOTS SHALL COINCIDE WITHIN .005 AND SLOT AXIS SHALL BE WITHIN .005 OF THREADED AXIS

11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE MS9359-08

08 — DASH NUMBER

MS9359 — BASIC MS NUMBER

MS9359-08 INDICATES NUT, CASTELLATED HEXAGON - A-286, SILVER PLATED; .164-40 UNJF-3B

NOTES:

1 ALL DIMENSIONS ARE IN INCHES

2 DO NOT USE UNASSIGNED PART NUMBERS

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS.

7 CERTAIN PROVISIONS (LIMITS OF SIZE FOR ACROSS-FLATS DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 37/2 WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED

FOR CHANGES SEE PAGE 1 AND 2

APPROVED 26 JUN 63 REVISED (B)

USER ACTIVITIES:
ARMY-ER

REVIEWER ACTIVITIES:
ARMY - MI
AIR FORCE - 82,85
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. NAVY-AS / Other Cust ARMY-AV	INTERNATIONAL INTEREST	TITLE: NUT, CASTELLATED HEXAGON - A-286, SILVER PLATED	MILITARY STANDARD MS9359
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1526

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:15Z
Check the source to verify that this is the current version before use.