FED SUP CLASS
5306

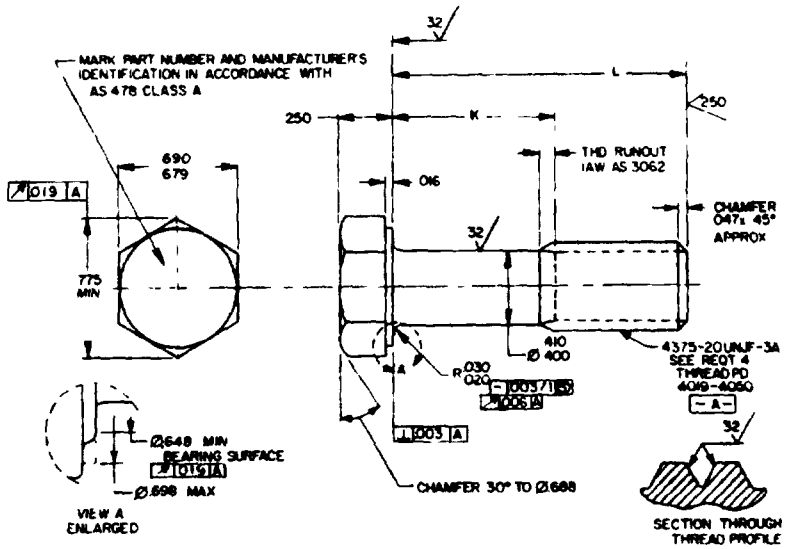


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-04	.688	.105- .125	5.78
-05	.750	.105- .125	6.01
-06	.812	.105- .125	6.24
-07	.875	.105- .125	6.47
-08	.938	.105- .125	6.69
-09	1.000	.105- .125	6.92
-10	1.062	.105- .125	7.15
-11	1.125	.105- .125	7.37
-12	1.188	.105- .125	7.60
-13	1.250	.105- .125	7.83
-14	1.312	.128- .188	8.06
-15	1.375	.190- .250	8.28
-16	1.438	.253- .313	8.51
-17	1.500	.315- .375	8.74
-18	1.562	.377- .437	8.97
-19	1.625	.440- .500	9.19
-20	1.688	.503- .563	9.42
-21	1.750	.565- .625	9.65
-22	1.875	.690- .750	10.10
-23	2.000	.815- .875	10.56
-24	2.125	.940-1.000	11.01
-25	2.250	1.065-1.125	11.47
-26	2.375	1.190-1.250	11.92
-27	2.500	1.315-1.375	12.38
-28	2.625	1.440-1.500	12.83
-29	2.750	1.565-1.625	13.29
-30	2.875	1.690-1.750	13.74

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-31	3.000	1.815-1.875	14.20
-32	3.125	1.940-2.000	14.65
-33	3.250	2.065-2.125	15.11
-34	3.375	2.190-2.250	15.56
-35	3.500	2.315-2.375	16.02
-36	3.625	2.440-2.500	16.47
-37	3.750	2.565-2.625	16.93
-38	3.875	2.690-2.750	17.38
-39	4.000	2.815-2.875	17.84
-40	4.125	2.940-3.000	18.29
-41	4.250	3.065-3.125	18.74
-42	4.375	3.190-3.250	19.20
-43	4.500	3.315-3.375	19.65
-44	4.625	3.440-3.500	20.11
-45	4.750	3.565-3.625	20.56
-46	4.875	3.690-3.750	21.02
-47	5.000	3.815-3.875	21.47
-48	5.125	3.940-4.000	21.93
-49	5.250	4.065-4.125	22.38
-50	5.375	4.190-4.250	22.84
-51	5.500	4.315-4.375	23.29
-52	5.625	4.440-4.500	23.75
-53	5.750	4.565-4.625	24.20
-54	5.875	4.690-4.750	24.66
-55	6.000	4.815-4.875	25.11

© ENTIRE STANDARD REVISED

APPROVED 2 FEB 68 REVISED © 22 MAY 86

P.A. NAVY-AS / ARMY-AV / AIR FORCE-99	INTERNATIONAL INTEREST	TITLE: BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, .4375-20 UNJF-3A	MILITARY STANDARD MS9522
PROCUREMENT SPECIFICATION: AMS 7452	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0986

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for expansive use shall be made from this document when applicable

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

MISC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5306

REQUIREMENTS

1 MATERIAL. IN ACCORDANCE WITH AMS 6322-80

2 PROTECTIVE COATING AND SURFACE TREATMENT CADMIUM PLATE IN ACCORDANCE WTIH AMS 2400-80 DIMENSIONS SPECIFIED ARE AFTER PLATING

3 HARDNESS 26-32 HRC

4 THREADS THREADS IN ACCORDANCE WITH MIL-S-8879

5 SURFACE TEXTURE SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46 1 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.

6 DIMENSIONING AND TOLERANCING DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M

7 HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -15 AND SMALLER.


8 TOLERANCE UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°

9 MAGNETIC PARTICLE INSPECTION MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83

10 EDGES BREAK SHARP EDGES 003-.015 UNLESS OTHERWISE SPECIFIED

11 PART NUMBER THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS9522-04



MS9522-04 INDICATES - BOLT, MACHINE, HEXAGON HEAD, 4375-20 UNJF-3A, LENGTH .688.

NOTES

1 ALL DIMENSIONS IN INCHES.

2 DO NOT USE UNASSIGNED PART NUMBERS

3 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

4 REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

5 THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION

6 AS AND AMS ARE SAE PUBLICATIONS

APPROVED 2 FEB 68 REVISED © FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P A	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY-AS Other Cust ARMY-AV AIR FORCE-99		BOLT, MACHINE, HEXAGON HEAD, STEEL, CADMIUM PLATED, 4375-20UNJF-3A	MS 9522
PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:		PAGE 2 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5306-0986

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.