MIL-B-15237B(SHIPS)
AMENDMENT - 6
27 November 1959
SUPERSEDING
Amendment - 5
1 April 1959

INTERIM MILITARY SPECIFICATION

BATHYTHERMOGRAPHS, SURFACE VESSEL

This amendment forms a part of Interim Military Specification MIL-B-15237B(SHIPS), 26 November 1954.

Pages 1 and 2, section 2: Delete and substitute:

"2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards and drawings, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL
RR-C-271 - Chains and Attachments, Welded, Weldless, and Roller Chain.
PPP-T-60 - Tape; Pressure Sensitive Adhesive Waterproof - for Packaging and Sealing.

MILITARY
MIL-E-16400 - Electronic Equipment, Naval Ship and Shore: General Specification.
MIL-T-17113 - Tests; Shock, Vibration, and Inclination (for Electronic Equipment) General Specification.
MIL-B-17668 - Brass Casting, Commercial.

NAVY DEPARTMENT
General Specifications for Inspection of Material.

STANDARDS

FEDERAL
Fed. Std. No. 595 - Colors.

MILITARY
MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS

BUREAU OF SHIPS
3,327,279(2) - Containers Storage and Shipping, Bathythermograph and its Accessories.
3,327,280(2) - Container Top, Bathythermograph.
3,327,281(2) - Container Bottom, Bathythermograph.
3,327,282(2) - Container Support, Bathythermograph.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

FSC 6655

Source: https://assist.dla.mil -- Downloaded: 20260-18T05:55Z
Check the source to verify that this is the current version before use.

2.2 Other publications. - The following documents form a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

NATIONAL BUREAU OF STANDARDS
Handbook H28 - Screw-Thread Standards for Federal Services.

CODE OF FEDERAL REGULATIONS
Interstate Commerce Commission
Regulations for Explosives and Other Dangerous Articles, etc.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.)"

Page 4, paragraph 3.6.1.1, line 2: Delete "0.70 ± 0.03" and substitute "$0.70^{+0.05}_{-0.03}$".

Page 5, paragraph 3.6.2.3, last sentence: Delete and substitute "The amplitude of motion of the pen shall be adjusted so that when the temperature of the thermal element changes from 28° to 90°F., the overall excursion shall be no more than 1-5/8 inches. The excursion of the pen at zero depth shall be 1-3/16 ± 1/8 inches (see figure 1)."

Page 7, paragraph 3.6.8: Item (b), delete "2" and substitute "3"; item (c), delete "2" and substitute "1".

Page 8, paragraph 3.6.8.2.2: Delete and substitute:

"3.6.8.2.2 Mounting. - Four grids shall be supplied with each bathythermograph as specified in 3.6.8. Two of these grids, one mounted in a holder and one unmounted, shall be shipped separately as specified by the bureau or agency concerned."

Page 9, paragraph 3.6.8.4, last two sentences: Delete.

Page 10, paragraph 4.2, line 2: Delete "Government".

Page 10, paragraph 4.2.1, line 2: Delete "Government".

Page 11, paragraph 4.4: Add as new paragraph:

"4.4 Unless otherwise specified herein the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order."

Page 11, section 5: Delete and substitute:

"5. PREPARATION FOR DELIVERY

"5.1 Packaging and packing. -

"5.1.1 The bathythermograph, with the nose sleeve attached, shall be packaged and packed for shipment in containers as specified on Drawings 3,327,279(2), 3,327,280(2), 3,327,281(2), and 3,327,282(2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

"5.1.2 The accessories (see 3.6.8) shall be cushioned and placed in the compartments provided on Drawing 3,327,279(2). Each box of slides shall be sealed with pressure sensitive tape conforming to type I or II, class 1 of Specification PPP-T-60 before being inserted into its individual compartments.

"5.1.3 The color of the paint used on the exterior of the container shall be gray color No. 26173 per Standard Fed. Std. No. 595.

"5.2 Technical manuals. - Technical manuals shall be placed in a kraft or polythylene envelope. One or two copies of the manual, as specified (see 6.2), shall be placed in each shipping container.

"5.3 Marking. - In addition to any special marking required by the contract or order, each item or unit package and accessory compartment shall be identified with the Government stock number, when applicable, or manufacturer's part number and nomenclature. Each shipping container shall be marked in accordance with Standard MIL-STD-129."

Add the attached figure as figure 1:

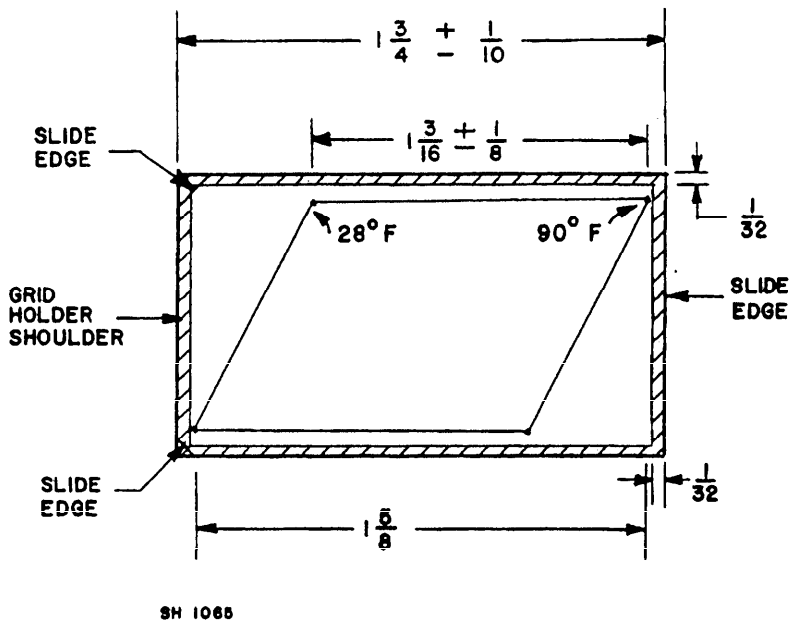


Figure 1 - Excursion limits of Bourdon Tube Pen.

Preparing activity:
Navy - Bureau of Ships
(Project 6655-0002Sh)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.