INCH-POUND

MIL-DTL-15228H
18 August 2026
SUPERSEDING
MIL-B-15228G
17 November 1988

DETAIL SPECIFICATION

BED, BUNK, STEEL, ROUND TUBE, SINGLE AND DOUBLE-DECK (CONVERTIBLE TYPE)

Inactive for new design after 9 January 2007

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for component material and their assembly into a single bunk bed with adapters for conversion to double-deck bunk beds.

1.2 Classification. The bunk beds covered by this specification may be of the following sizes as specified (see 6.2).

Size 1 - 36.0 inches wide by 79.0 inches long overall
Size 2 - 36.0 inches wide by 84.0 inches long overall

1.2.1 Part or Identifying Number (PIN). The PIN for the bunk beds covered by this specification will consist of a "M" prefix and the basic specification number followed by a hyphen and a two digit code number. The two digit code number corresponds to the size. The PINs for the two sizes of bunk beds are as follows:

a. M15228-01 for size 1 bunk bed.
b. M15228-02 for size 2 bunk bed.

2. APPLICABLE PUBLICATIONS

2.1 General. The publications listed in this section are specified in sections 3 and 4 of this specification. This section does not include publications cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, users of this document are cautioned that they must meet all specified requirements of publications cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government publications.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

Comments, suggestions, or questions on this document should be addressed to: DLA Troop Support-Construction and Equipment (C&E) (ATTN: Code FCSB), 700 Robbins Ave, Philadelphia, PA 19111-5096 or email to CE_Standardization@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 7105
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

FEDERAL SPECIFICATION

TT-C-490	Chemical Conversion Coatings and Pretreatments for Metallic Substrates (Base for Organic Coatings)

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-24712	Coatings, Powder, Thermosetting

(Copies of these documents are available online at https://assist.dla.mil.)

2.3 Non-Government publications. The following publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these publications are those cited in the solicitation or contract.

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ Z1.4	Sampling Procedures and Tables for Inspection by Attributes

(Copies of this publication are available from https://www.asq.org.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS STANDARD (ASTM)

ASTM A29/A29M	Standard Specification for General Requirements for Steel Bars, Carbon and Alloy, Hot-Wrought
ASTM A36/A36M	Standard Specification for Carbon Structural Steel
ASTM A108/A108M	Standard Specification for Steel Bar, Carbon and Alloy, Cold-Finished
ASTM A304	Standard Specification for Carbon and Alloy Steel Bars Subject to End-Quench Hardenability Requirements
ASTM A513/A513M	Standard Specification for Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing
ASTM A1008/A1008M	Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural,
ASTM A1011/A1011M	Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Allow with Improved Formability, and Ultra-High-Strength

(Copies of these publications are available from https://www.astm.org.)

AMERICAN WELDING SOCIETY

AWS A3.0M/3.0	Standard Welding Terms and Definitions

(Copies of this publication are available from https://www.aws.org.)

SOCIETY OF AUTOMOTIVE ENGINEERS (SAE)

SAE AMS-STD-595	Colors Used in Government Procurement

(Copies of this publication are available from https://www.sae.org.)

2.4 Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The bunk bed (see Figure 1) shall be of all steel three-piece construction consisting of matching round steel tube, head and foot ends, a wedge type corner lock with four bearing points, and a fully-framed spring unit with sinuous (no-sag type) spring fabric, as shown in Figures 2 and 3. The bunk bed shall be of the size specified (see 6.2).

3.2 First article. When specified (see 6.2) a sample shall be subjected to first article inspection (see 4.2.1 and 6.4).

3.3 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products is allowed under this specification.

3.4.1 Steel. All steel shall be smooth, free from rust, scale, pits, scratches, laps, and buckles affecting strength and appearance, Unless otherwise specified herein, the gage numbers or thicknesses, specified for steel are subject to standard tolerances. Steel shall be tested in accordance with 4.5.1 where applicable.

3.4.1.1 Steel tubing. Steel tubing for bed ends, adapters, and stretcher braces shall be in accordance with ASTM A513/A513M, electric resistance welded type, round.

3.4.1.2 Steel angles. Steel angles for spring fabric frame shall be in accordance with ASTM A36/A36M and shall be 2.0 inches by 1.5 inches by 0.1875 inch thick. Edges of angles shall be slightly rounded to avoid sharpness.

3.4.1.3 Spring fabric. Spring fabric shall be high carbon sinuous (no-sag type) furniture spring wire in accordance with ASTM A108/A108M table A1.8. Spring wire shall be number 10 United States (US) Steel Wire Gage, 31.0 inches long in the flat position, containing 19 full loops including the "Z" hook ends. Spring fabric shall be fabricated to 7.50 inches diameter ±0.50 inch. Cut ends shall not have burrs or sharp projections. Dimensional and size requirements shall be in accordance with Figure 4.

3.4.1.4 Spring fabric links. Spring fabric links shall be number 11 US Steel Wire Gage basic steel wire in accordance with ASTM A304 with galvanized finish. Dimensional and size requirements shall be in accordance with Figure 4.

3.4.1.5 Helical springs. Helical springs shall be number 12 US Steel Wire Gage steel premier wire with electrodeposited zinc coating. Tensile strength shall be in the range from 204,000 to 230,000 pounds per square inch. Dimensional and size requirements shall be in accordance with Figure 4.

3.4.1.6 Corner locks.

3.4.1.6.1 Male corner locks. The male corner locks shall be in accordance with ASTM A1101/A1101M, hot-rolled sheet or strip, commercial quality steel, pickled and oiled of shape, thickness, and dimensional requirements shown in Figure 5. As an alternate, the male corner locks shall be in accordance with ASTM A1008/A1008M, cold-rolled sheet, commercial quality, and oiled.

3.4.1.6.2 Male corner lock studs. Male corner lock studs shall be in accordance with ASTM A29/A29M

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

Grade 1010 steel. When upset, shank shall be annealed for riveting with a Rockwell hardness of not greater than 40 on the "B" scale. When machined, studs shall be AISI Designation 1213 or 1215 steel conforming to ASTM A108/A108M. Dimensional requirements shall be as shown in Figure 5.

3.4.1.6.3 Female corner locks. The female corner locks shall be in accordance with the requirements specified in 3.4.1.6.1 except that the shape, thickness, and dimensional requirements shall be shown in Figure 6.

3.4.2 Paint. The epoxy-powder coating shall be in accordance with MIL-PRF-24712, Type I or II, Class 4. Color shall be in accordance with SAE AMS-STD-595, color number 16251 (Gray gloss), 20059, 20227, 23578, 26120, 26424, 27038 or 27769 as specified (see 3.7.2 and 6.2).

3.5 Accessories.

3.5.1 Steel caps. Steel caps for top of bed end posts shall be not less than number 24 US Standard Gage carbon steel, hardened and acid dipped for paint adhesion. Caps shall have 12 prongs with dimensional requirements as shown in Part A of Figure 7.

3.5.2 Bed shoes. Steel bed shoes for bed end posts shall be round body die-formed or machined from solid AISI Designation 1213 or 1215 steel conforming to ASTM A108/A108M, chromium plated. Dimensional and hardened requirements shall be in accordance with Part C of Figure 7. The snap ring for securing steel shoe in bottom of the end post shall be in accordance with Part D of Figure 7. As an alternate, bed shoes may be provided in accordance with the requirements of Part B of Figure 7. The shoe shall be a "file hard," nickel plated cold rolled steel, die-formed base curled over a zinc plated hot rolled, die-formed inside shell with the resultant gap between the formed diameter of the inside shell and the curled base not greater than 0.03125 inch. The spring retainer shall be AISI Designation 1010 cold rolled steel with a Rockwell hardness range between 85 to 95 on the "B" scale and assembled to the bed shoe with a zinc plated bright basic steel wire rivet and a zinc plated hot rolled steel washer between the spring retainer and the inside shell to absorb side thrust when mounted in the bed end post.

3.5.3 Adapter insert. Insert for adapter shall be cold rolled, sheet steel, matte finish, in accordance with ASTM A1008/A1008M fabricated into open joint tubing. The finish color of the adapter insert shall be the same as the bed.

3.6 Construction. To insure interchangeability, beds shall be similar and of the same construction in accordance with design, material thickness, dimensions and tolerances as shown in Figures 1 through 13 and as specified herein. Materials shall be as specified in 3.4 and accessories as specified in 3.5. Components for both size beds shall be the same, except the 84-inch long bed (size 2) shall require two additional strands of spring fabric, side rails shall be 5.0 inches longer than the 79-inch long bed (size 1), and spring fabric link sizes shall be in accordance with Figure 4.

3.6.1 Bed ends. Head and foot bed ends shall be of same construction as shown in Figure 8. Each bed end shall consist of two main posts, two horizontal tubes, four intermediate vertical tubes, two female corner locks, two steel caps and two bed shoes. Main posts shall be round steel tube, 28.50 inches high exclusive of shoes and caps, 1.50 inches outside diameter with a wall thickness of 0.083 inch. Horizontal tubes shall be steel, round, 0.875 inch outside diameter with a wall thickness of 0.065 inch. Intermediate tubes (filler) shall be steel, round, 0.50 inch outside diameter with a wall thickness of 0.065 inch. Horizontal tubes shall extend between the posts and intermediate tubes in a vertical position, parallel to the post tubes as shown in Figure 8. All tube connections shall be made by inserting them into connecting tubes, placing all components in jigs and joining by most applicable methods of welding around the entire perimeter of joints (see 3.10.1). Posts shall be closed at top with steel caps requiring 5.0 pounds pull ±1.0 pound to remove the cap and fitted at bottom with steel shoes requiring 10.0 pounds pull ±1 pound to remove from the post. The shoes shall be removable without use of tools, so beds can be converted to double-deck type when desired. Female corner lock shall be placed on main post as shown in Figure 8 to match the male corner lock on the spring unit. The female corner lock shall be properly jigged and welded across the top, bottom, down 1.0 inch from top and

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

up 1.0 inch from bottom on the unexposed side as shown in Figure 6.

3.6.2 Bed spring unit. The bed spring unit shall consist of an all welded angle frame, sinuous (no-sag type) spring fabric, two round tubular steel stretcher braces, and four male corner locks as shown in Figures 2 and 3. The frame shall be constructed of steel angle sides and ends as specified in 3.4.1.2, with the 2.0-inch flange in the vertical position and the 1.50-inch horizontal flanges punched as shown in Figure 9 for insertion of spring fabric "Z" hook ends in side angles and spring helicals in the end angles. The horizontal flanges of the end angles shall overlay the horizontal flanges of the side angles with width and length as shown in Figures 2 and 3. Frame shall be properly jigged and welded (see 3.10.1) as shown in Figures 10 and 11. The stretcher braces of steel tubing with 0.875 inch outside diameter and a 0.065 inch wall thickness shall be bowed, and the ends flattened as shown in Figure 12. The stretcher braces shall be located on side angles as shown in Figure 2 for size 1 bed and as shown in Figure 3 for size 2 bed. Each end of the stretcher brace shall be secured to horizontal flange of side angle by a continuous weld along the entire union of the side angle surface and the stretcher brace edge. The male corner lock, as shown in Figure 5, shall be of the double stud design. The male corner lock plate shall be provided with two shouldered steel studs riveted (see 3.10.2) thereto to engage the female corner lock as shown in Figure 5. The male corner shall be located on side angle as shown in Figure 2 or 3 and welded thereto as shown in Figure 10. The upper and lower extension on the male lock end shall butt against the slotted surface of the female lock providing a lock wedge fit to prevent the bed from racking. There shall be four point contact between male and female corner locks; at upper and lower extensions on male lock end and the two studs. The spring fabric shall consist of 18 equally spaced transverse strands of sinuous (no-sag type) spring fabric for size 1 bed and 20 strands for size 2 bed. Each strand shall be connected to the adjacent strand with five rows of links (see Figure 4) clinched over the spring fabric. The "Z" hook ends of each strand shall be inserted in holes in horizontal flange of each side angle in a manner to provide secure retention; free from scratching and tearing hazard. Each end strand shall be attached to the end angle with five helical springs (see Figure 4).

3.6.3 Adapters. When specified (see 6.2), each pair of bunk beds shall be provided with a set of four adapters for converting to a double-deck bed. Adapters shall consist of a straight section of steel tubing 10.50 inches long with an outside diameter of 1.50 inches and a wall thickness of 0.083 inch and inserts (inner sleeves) (see 3.5.3) which shall project 3.0 inches from each end as shown in Figure 13. Insert shall be a drive fit within the outer tube and shall be further secured with two drive screws. Outer edges of insert ends shall be beveled to ease insertion into bed posts. Inserts shall be adjusted as necessary to fit snugly, after painting, into top of lower bed and bottom of upper bed posts when caps and shoes are removed. Adapters shall be examined for assembly and disassembly as specified in 4.4.2.

3.7 Treatment and painting. All surfaces of the bunk beds, except plated steel shoes, shall be painted. Application of finish shall produce smooth and uniform surfaces without runs, wrinkles, and shall be free from objectionable defects such as scale under the finish, rust, or discoloring.

3.7.1 Surface preparation. All surfaces to be painted shall be treated in accordance with Type I or Type II of TT-C-490.

3.7.2 Finish. All surfaces shall be finished with an epoxy-powder coating of the color specified (see 3.4.2 and 6.2) applied to a dry film thickness of not less than 2.0 mils. The coating shall be baked in accordance with the paint manufacturer's recommendations.

3.8 Identification marking. The letters "US" in characters 1.0 inch high shall be permanently and legibly indented at center of horizontal or vertical surface on one end angle of each bed. The specification number, stock number, nomenclature, manufacturer's name, trade name or trademark of such character easily identifiable with the manufacturer, and the year and contract number shall be indented or on a corrosion-resisting metal plate permanently attached on same end angle surface and to right of indented characters "US." Nomenclature shall be "Bed, Bunk, Steel, Round Tube, Single and Double-Deck." Bed ends shall be identified by permanently and legibly indenting the manufacturer's initials or trademark of such character easily identifiable with the manufacturer on one surface of one or both female corner locks. Letters or trademark shall be approximately 0.50 inch high at location shown in Figure 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. Workmanship shall be of the highest quality throughout and in accordance with the best standard practice used in the manufacture of high grade commercial furniture of this type.

3.9.1 Welding. Bed spring fillet welds shall be in accordance with the definition and size requirements specified in AWS A3.0M/A3.0. The surface parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings. The deposited weld metal shall be thoroughly fused with base metal and edges of union and shall penetrate into the root of the joint. All rough surfaces or projecting fins shall be ground smooth to prevent personal injury or damage to bedding. Weld spatter or flux shall be removed from surfaces surrounding the welding area.

3.9.2 Riveting. Studs shall be secured to the male corner locks by peening as shown in Figure 5. The studs shall be tight with the shoulder and end in full contact with the male corner locks. The head of the stud end shall be flat, parallel to the male corner lock surface, and edges free of burrs or fins.

4. VERIFICATION

4.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents).

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on one bunk bed, or two bunk beds if adapters are required (see 3.6.3), when a first article is required (see 3.2 and 6.2). This inspection shall include the examination of 4.4, the tests of 4.5, and the packaging inspection of 4.6. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Conformance inspection. The conformance inspection shall include the examination of 4.4, the tests of 4.5 and the packaging inspection 4.6. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with ASQ Z1.4. The unit of product shall be one complete bunk bed or two complete bunk beds and four adapters, when adapters are required. A lot shall consist of one day's production of bunk beds (with adapters, if applicable), but shall not consist of more than 500 bunk beds and adapters. If an inspection lot is rejected, the contractor may rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separated from new lots, and shall be clearly identified as reinspected lots.

4.3.1 Sampling for examination. Examination shall be based on inspection level S-4.

4.3.2 Sampling for tests. Tests shall be based on inspection level S-4.

4.4 Examination. Each sample shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the manufacturer's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. Defects shall be classified in

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

accordance with table 1. Each attribute within each classification of multiple defects shall constitute one defect.

4.4.1 Bed assembly examination. Each sample shall be assembled to determine ease of assembly and proper fit of mating parts. In addition, the beds shall be double-decked, when adapters are required, to assure proper overall dimensions among beds. Failure of studs and male corner lock extensions (see 3.6.1) to fit properly, requiring excessive force or use of tools to assemble or inability to match top bed post bottoms and bottom bed top, when double-decking each, shall constitute a major defect.

4.4.2 Adapter assembly examination. When adapters are procured separately or with beds, samples shall be examined for ease of double-decking. Assembly and disassembly with beds or steel tubes of same diameter and wall thickness as bed main posts as specified herein shall be performed manually without the use of tools and shall be a snug fit. Inside diameter of bed posts or steel tubes shall be checked periodically for proper dimensions (see Figure 13).

4.5 Tests.

4.5.1 Metals. Specimens of metal components shall be tested in accordance with their reference steel specifications wherever applicable.

4.5.2 Bed test. A load of 600 pounds shall be placed across the side angles of spring unit of an assembled bed, midway between the bed ends. The test load bottom or base shall be approximately 18.0 inches wide. At the center of the spring unit, the deflection of the spring unit side angles shall be not greater than 0.4375 inch with the 600 pound load in place. Upon removal of the test load, the spring unit shall return to its original position with no visible distortion in the bed locks or spring unit frame.

4.6 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

TABLE I. Classification of defects.

Classification	Defect	Requirement paragraph
Critical	None defined.	
Major		
101	Design and construction not as specified.	3.1, 3.4, 3.5 and 3.6
102	Parts not manufactured to interchangeable standards.	3.3 and 3.6
103	Steel surfaces not as specified.	3.4.1
104	Steel components not as specified.	3.4.1.1 thru 3.4.1.6.3
105	Epoxy-powder not as specified.	3.4.2
106	Steel caps not as specified.	3.5.1
107	Bed shoes not as specified.	3.5.2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects - Continued.

Classification	Defect	Requirement paragraph
Major (Continued)		
108	Overall dimensions not as specified.	3.6 and Figure 1
109	Bed end dimensions not as specified.	3.6.1 and Figure 8
110	Wall thickness of main posts not as specified.	3.6.1
111	Wall thickness of horizontal and intermediate vertical tubes not as specified.	3.6.1
112	Tube connections not as specified.	3.6.1
113	Shoes not removable without use of tools.	3.6.1
114	Female corner locks not welded as specified.	3.6.1 and Figure 6
115	Bed spring unit angle frame members not welded as specified.	3.6.2 and Figures 10 and 11
116	Long leg of angle sides not in vertical position as specified.	3.6.2
117	Stretcher braces not as specified.	3.6.2
118	Stretcher braces not located as specified.	3.6.2
119	Corner locks not located as specified.	3.6.2
120	Number of strands of spring fabric not as specified.	3.6.2
121	Spring fabric loose and not attached as specified.	3.6.2
122	Hook ends of spring fabric not free of scratching and tearing hazard.	3.6.2
123	Adapters not as specified (when adapters are required).	3.6.3
124	Four adapters not provided for each of two beds (when adapters are required).	3.6.3
125	Dimensions and thicknesses for adapters not as specified.	3.6.3
126	Outer edges of adapter insert ends not beveled.	3.6.3
127	Finish not without runs, wrinkles, or areas of thin or no film, or other defects such as indication of rust or scale under finish or discoloring.	3.7
128	Surfaces to be painted not prepared as specified.	3.7.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects - Continued.

Classification	Defect	Requirement paragraph
Major (Continued)		
129	Thickness of finish coat less than as specified.	3.7.2
130	Coating baking cycle not as specified.	3.7.2
131	Welding not as specified.	3.9.1
132	Studs not secured as specified.	3.9.1
133	Preservation, packaging, and marking not as specified.	5.1
Minor		
201	Edges of angles not rounded.	3.4.1.2
202	Color not as specified.	3.4.2 and 3.7.2
203	Pull necessary to remove steel caps not as specified.	3.6.1
204	Pull necessary to remove steel shoes not as specified.	3.6.1
205	Identification marking missing, illegible, or not as specified.	3.8

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of material is to be performed by DoD or in-house contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Service or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contracting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

6.1 Intended use. This specification covers bunk beds for use in unaccompanied enlisted personnel housing.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Size required (see 1.2).
c. When first article is required for inspection and approval (see 3.2).
d. Color of paint (see 3.4.2).
e. When four adapters are to be provided with each pair of bunk beds (see 3.6.3).
f. Packaging requirements (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

6.3 Assembly instructions. The manufacturer should prepare assembly instructions for single bed, double-decking. In addition, a sketch similar to Figure 14 should be included in the instructions to preclude the possibility of forcing male corner lock studs to seat or bottom in female corner lock. Instructions should be provided on a white paper sheet, 8.5 inches wide by 11.0 inches long. Instructions for assembly of the bunk bed should contain the following information:

a. Single bed assembly instructions: Assemble a single bunk bed by placing a spring unit on the floor with spring up, stand a bed end at each end of the spring unit, with one person standing outside of each bed end, lift the spring unit up and place between the slotted extensions on the main posts of the bed end and fit the studs into the slots. Lightly tap each corner to set the studs in the slots. DO NOT FORCE THE STUDS TO SEAT AT BOTTOM OF THE SLOTS. See illustration below. (NOTE: A sketch similar to Figure 14 should be inserted below this paragraph contained in the assembly instructions).

b. Double-decking instructions: Assemble two bunk beds as instructed above. Remove the caps from the top of the main posts at each corner of one bed and remove the bed shoes from the bottom of the main posts of the other bed. Place an adapter into each post from which the caps were removed. Lift the other bed above the adapters and insert the top of the adapters into the bottom of the main posts.

6.4 First article. When a first article inspection is required, the item should be a first article sample or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one complete bed or two complete beds with four adapters. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Subject Term (key Word) Listing:

Adapters
Helical springs
Corner locks
Bed ends
Bed spring units

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - GL
Air Force - 35
DLA - CQ

Preparing activity:
DLA - CQ


(Project 7105-2026-001)

Review activities:
Army - MD


NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

NOTE: MEASURE OVERALL BUNK BED LENGTH AT MID POINT BETWEEN TOP AND BOTTOM OF BED POSTS.

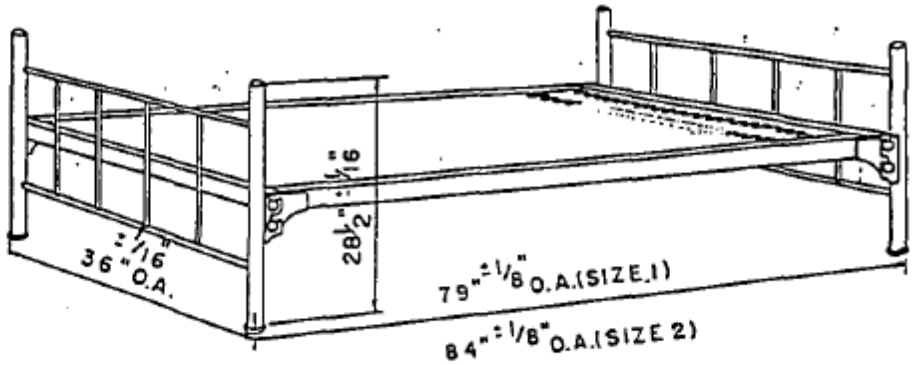

A. MILITARY STANDARD BUNK BED, SINGLE

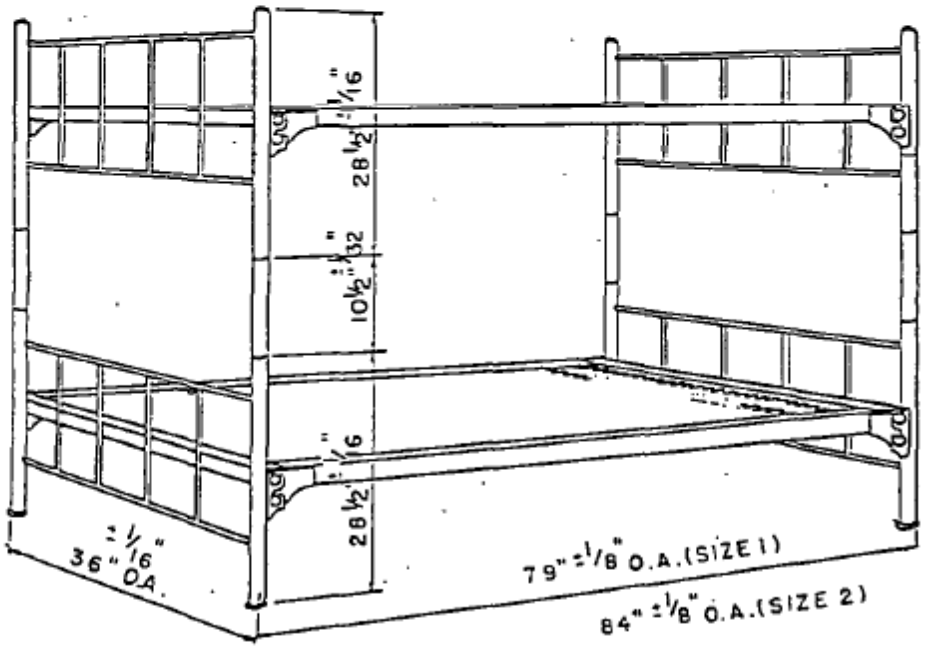

B. MILITARY STANDARD BUNK BED, SINGLE DOUBLE DECKED

FIGURE 1. Military standard bunk bed, steel, single and double-deck (convertible type).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

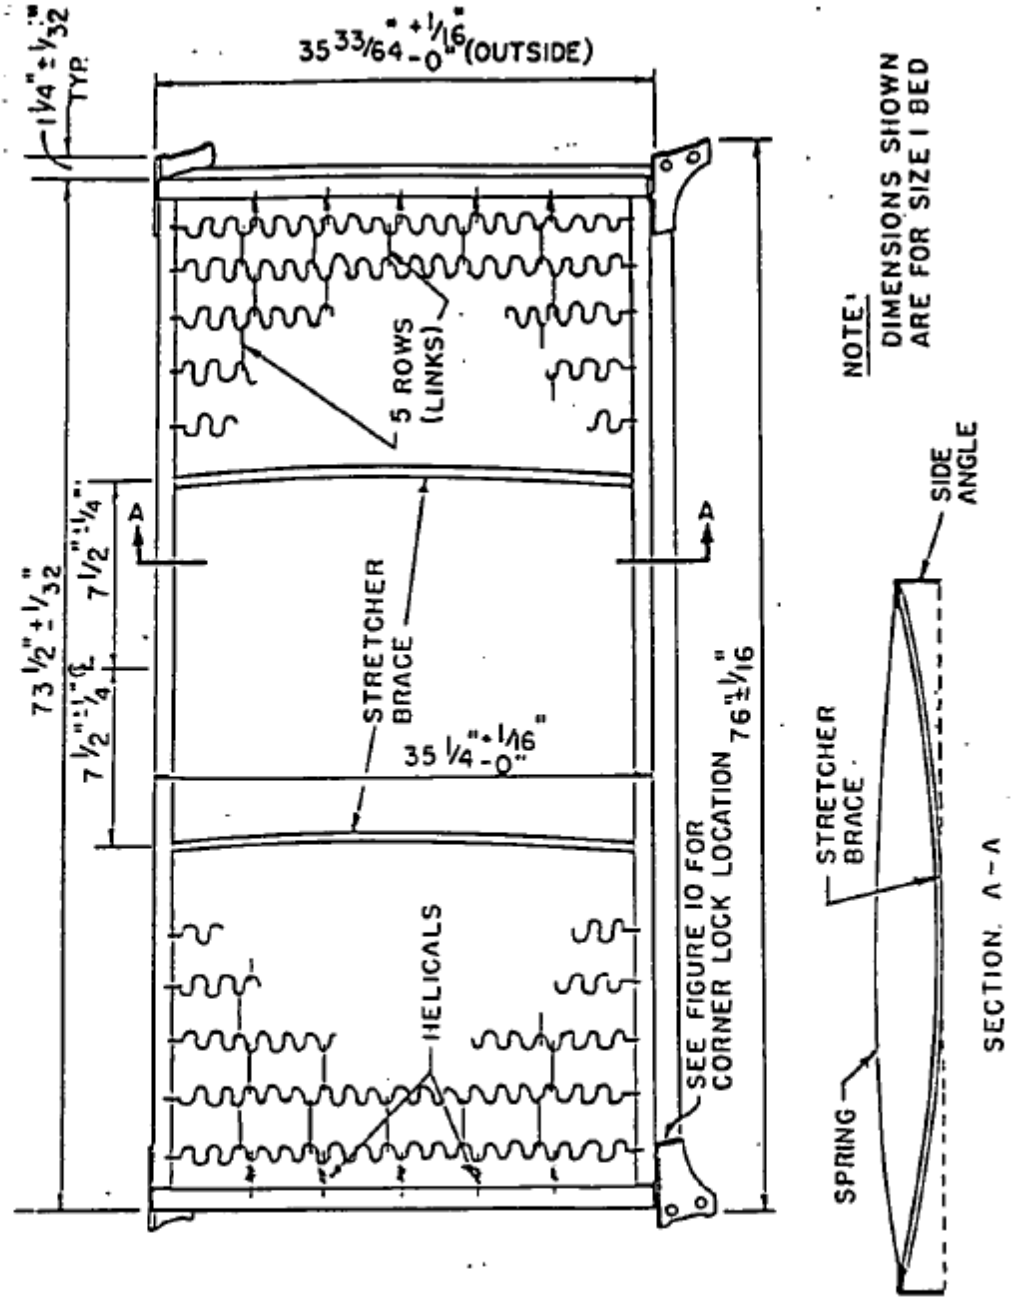


FIGURE 2. Military standard bunk bed spring unit (top view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.



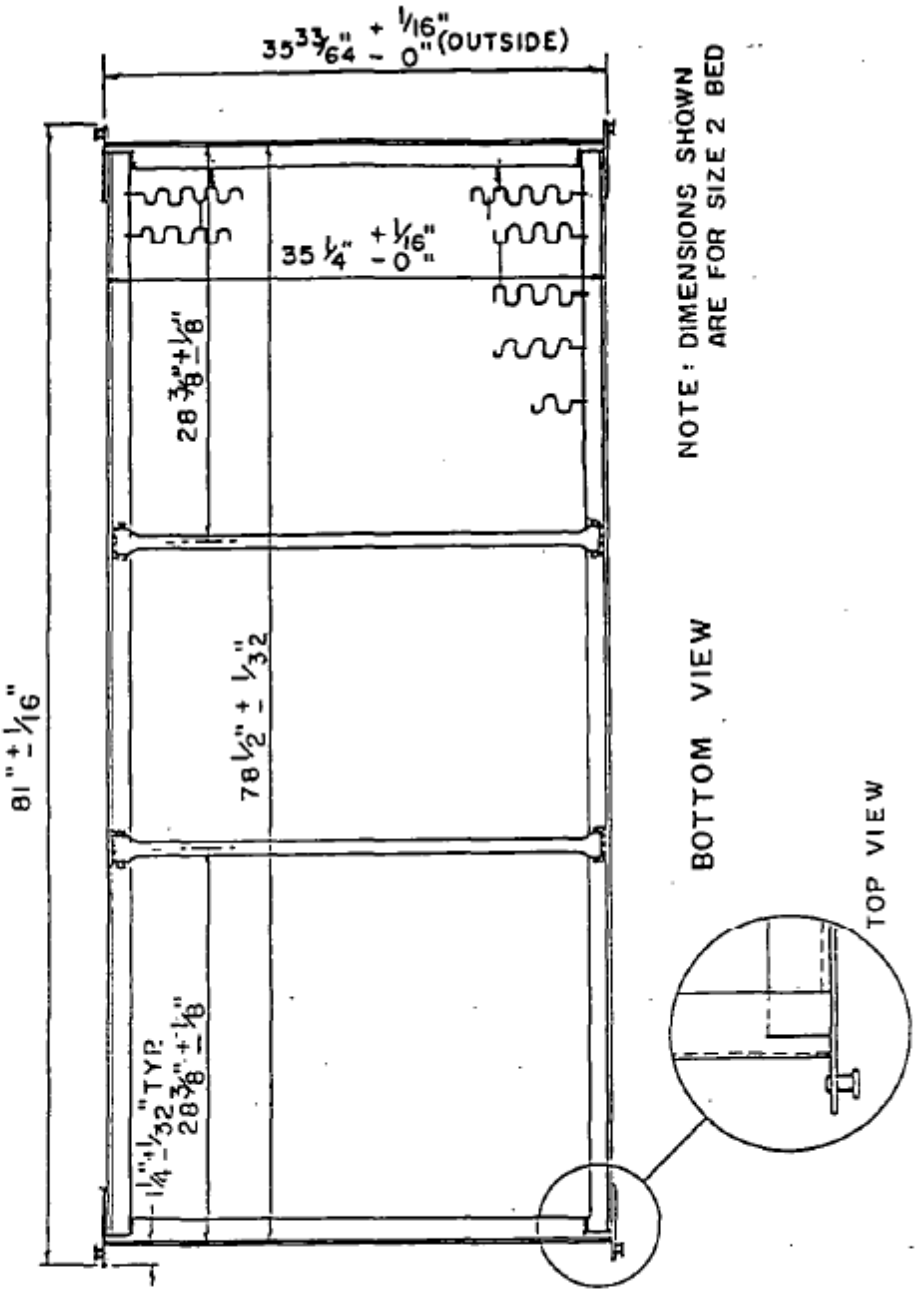


FIGURE 3. Military standard bunk bed spring unit (bottom view).


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

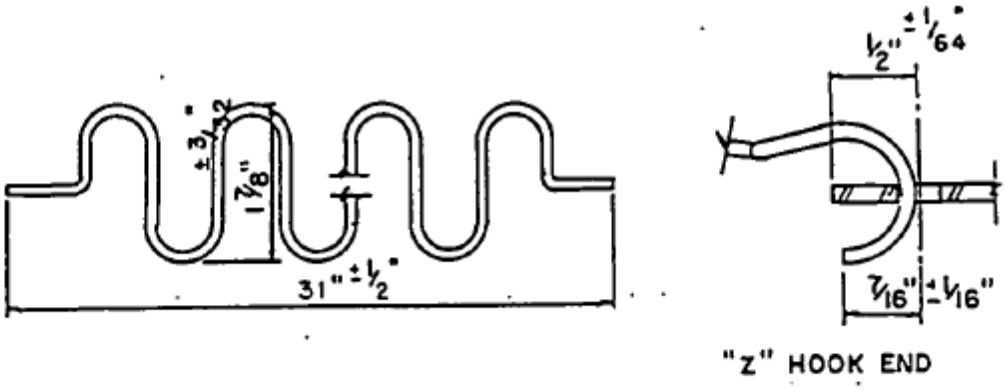

A. SPRING FABRIC (no sag type)

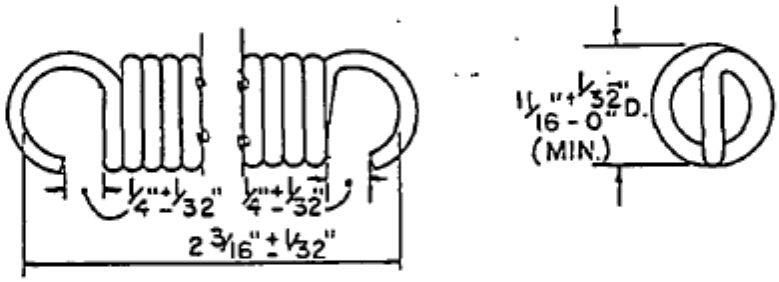

B. SPRING FABRIC HELICALS
(12 turns close wound)
2.045" ±.005" SIZE 2
2.1875" ±.005" SIZE 1

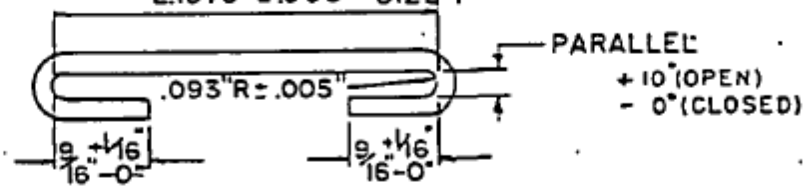

C. SPRING FABRIC LINK

FIGURE 4. Spring unit components.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

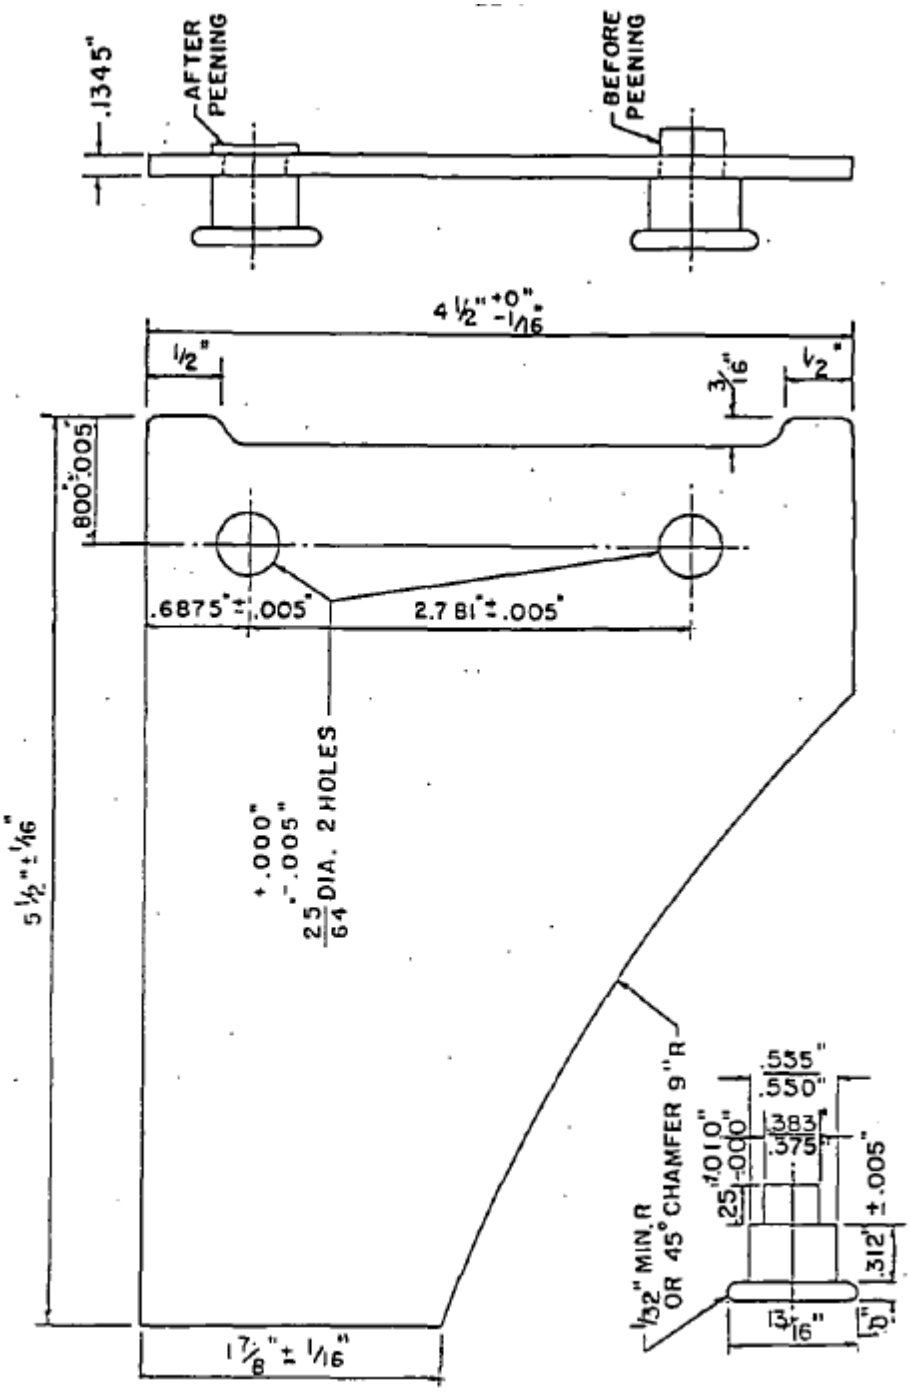


FIGURE 5. Male corner lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

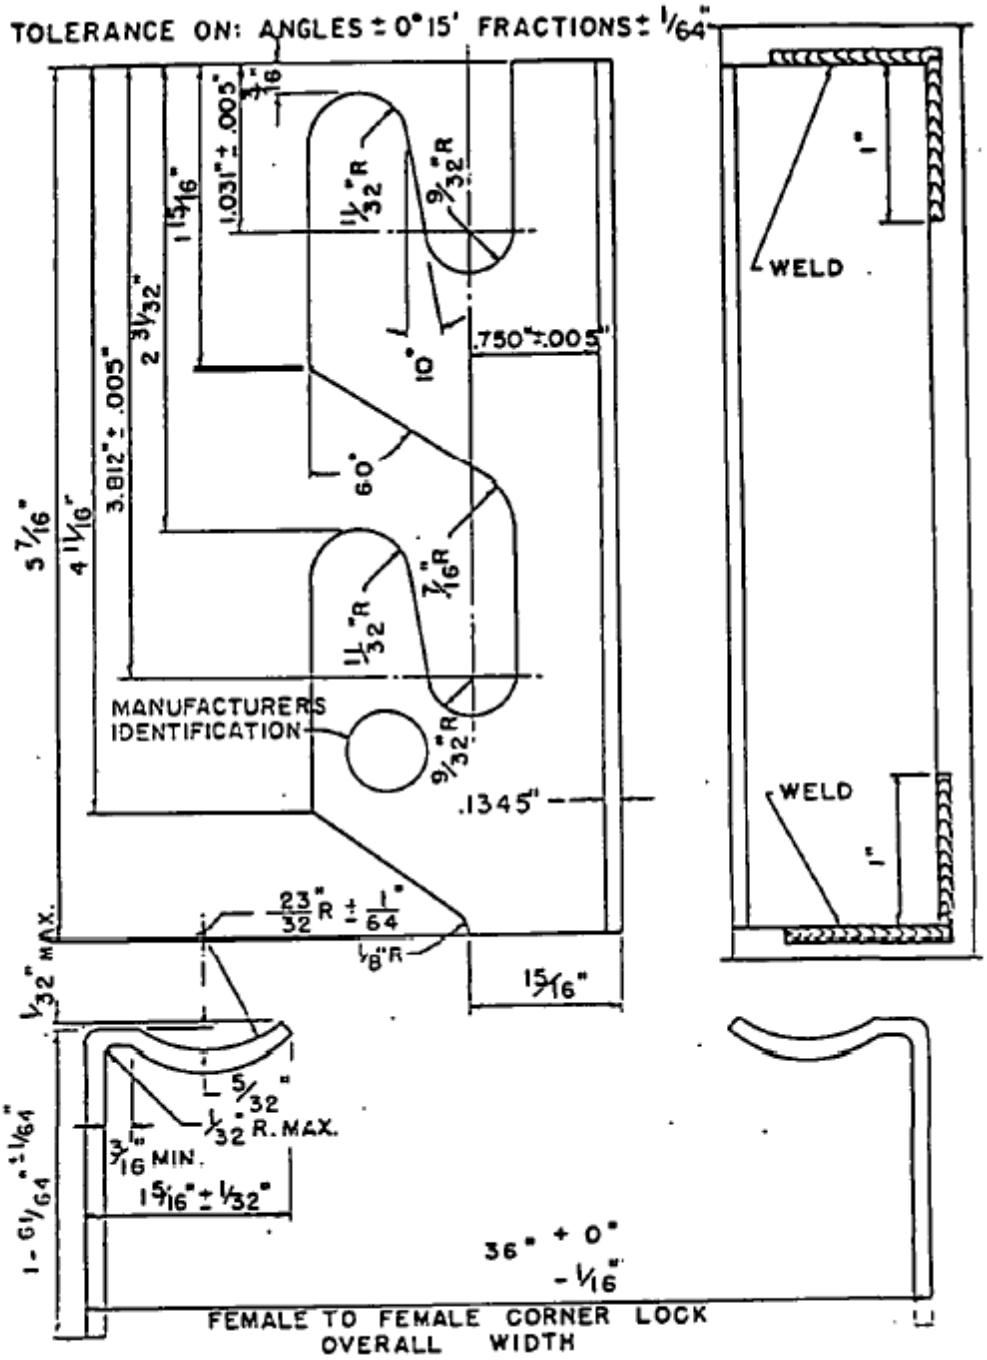


FIGURE 6. Female corner lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

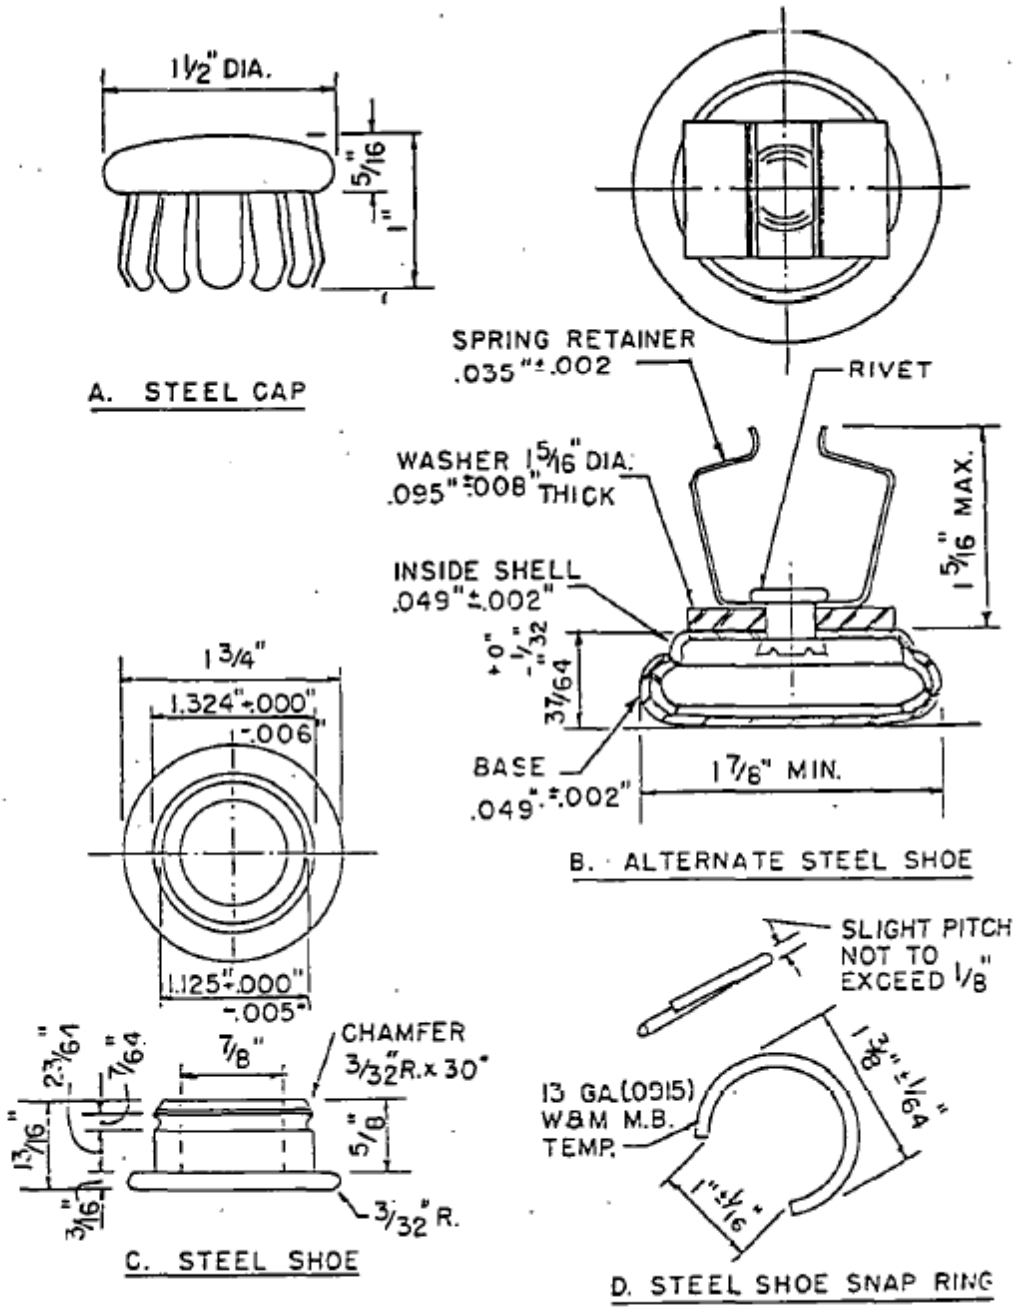


FIGURE 7. Steel cap and shoes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

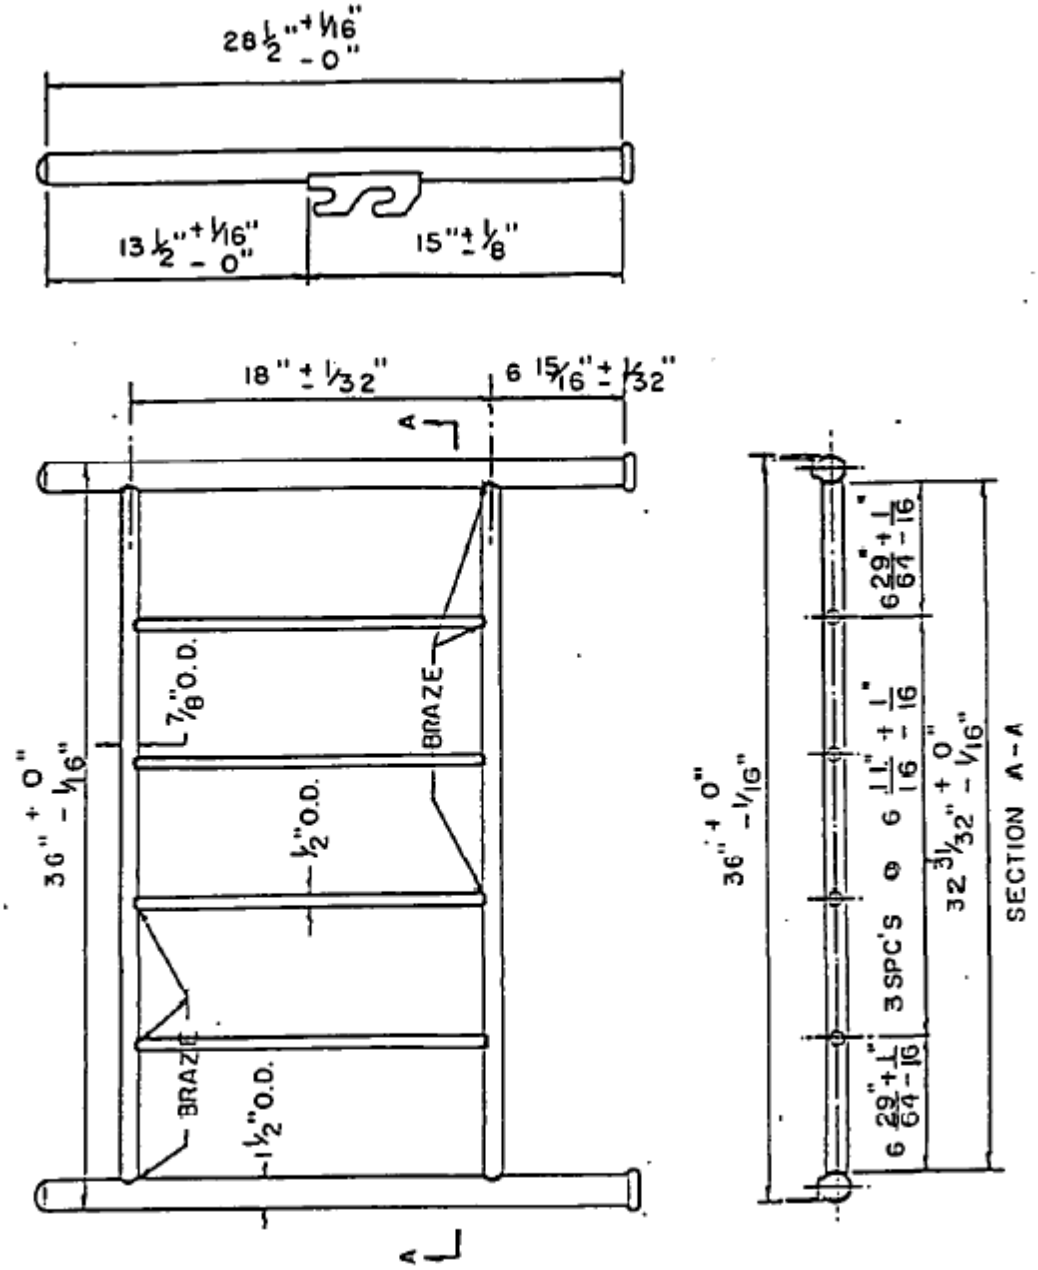


FIGURE 8. Bunk bed head and foot ends.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

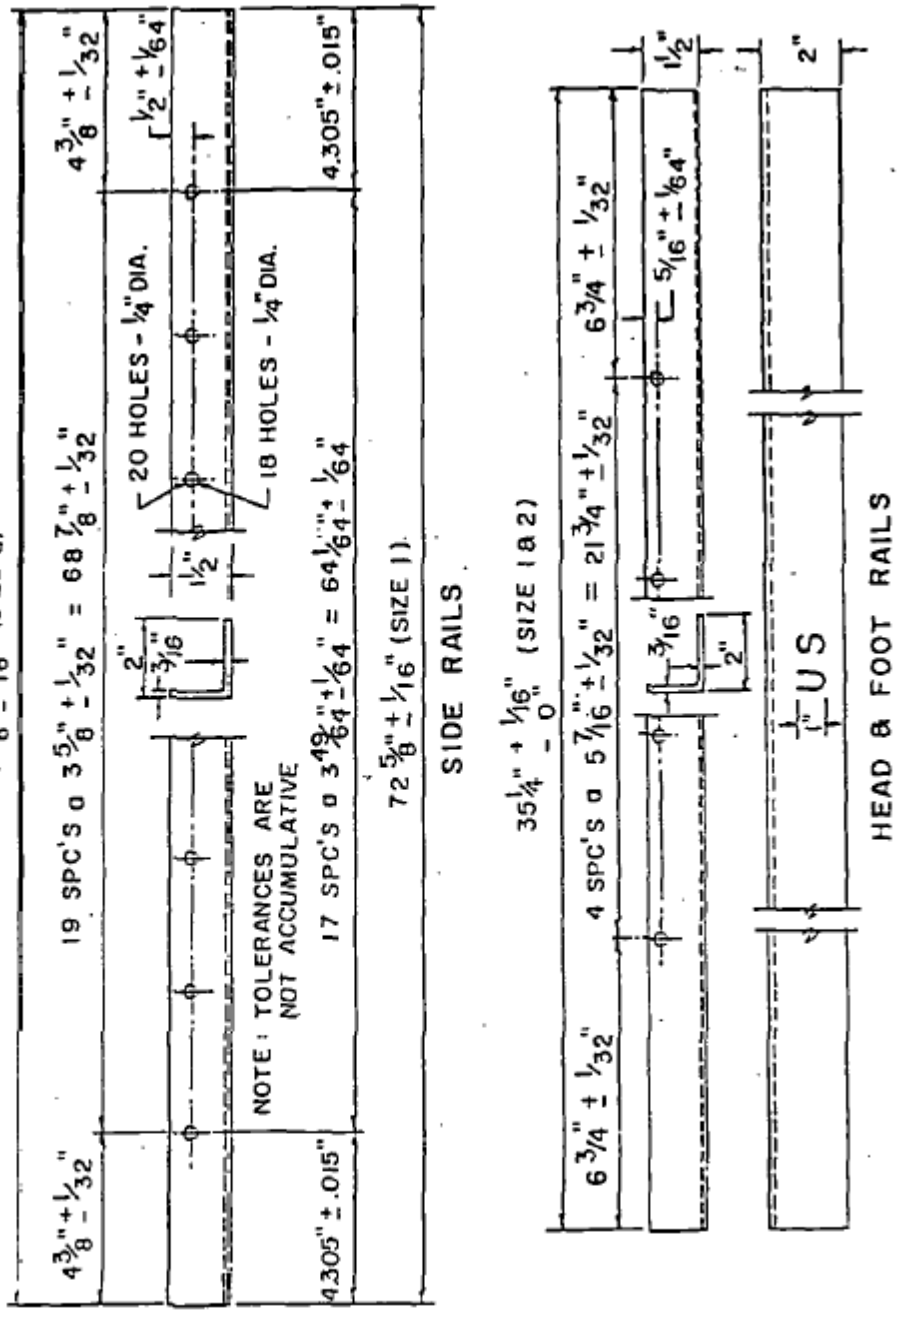


FIGURE 9. Side, head, and foot rails.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

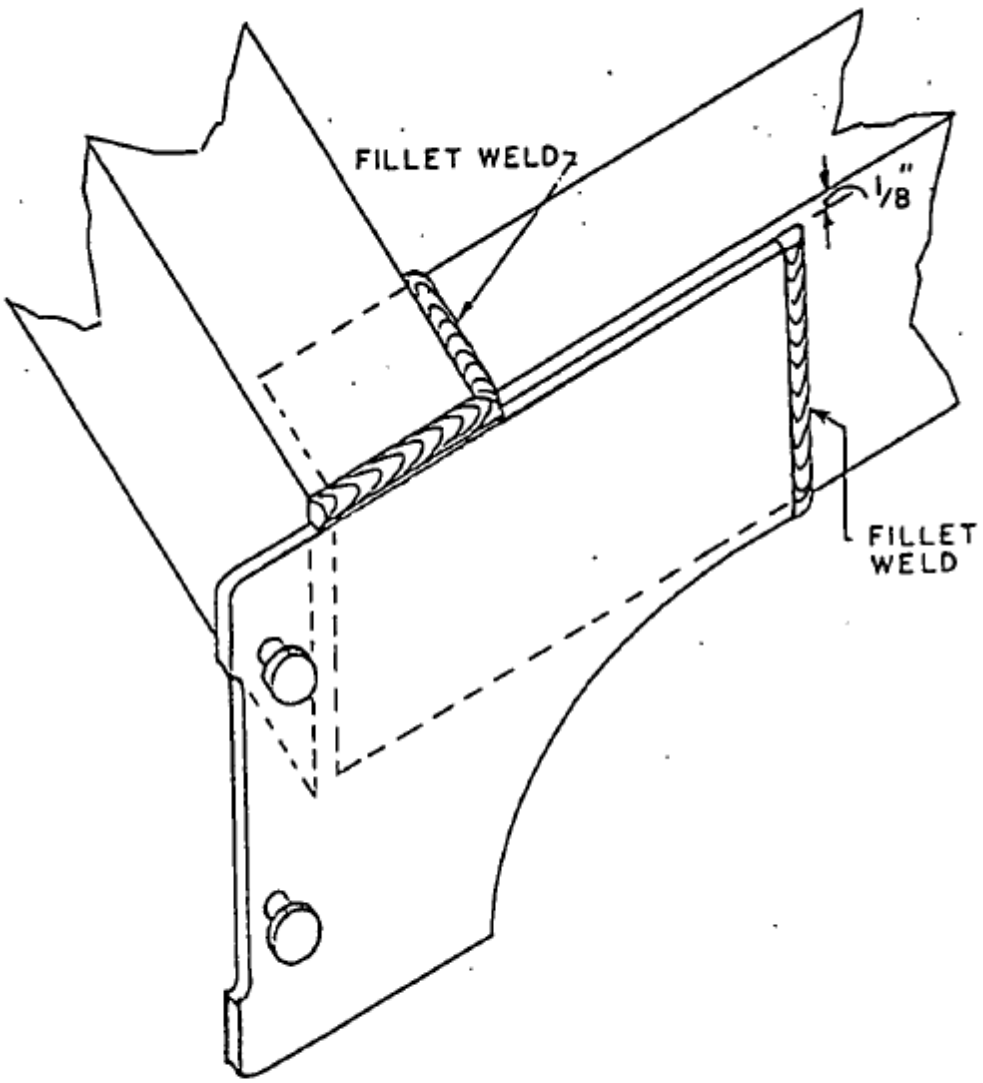


FIGURE 10. Spring frame welding (top view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

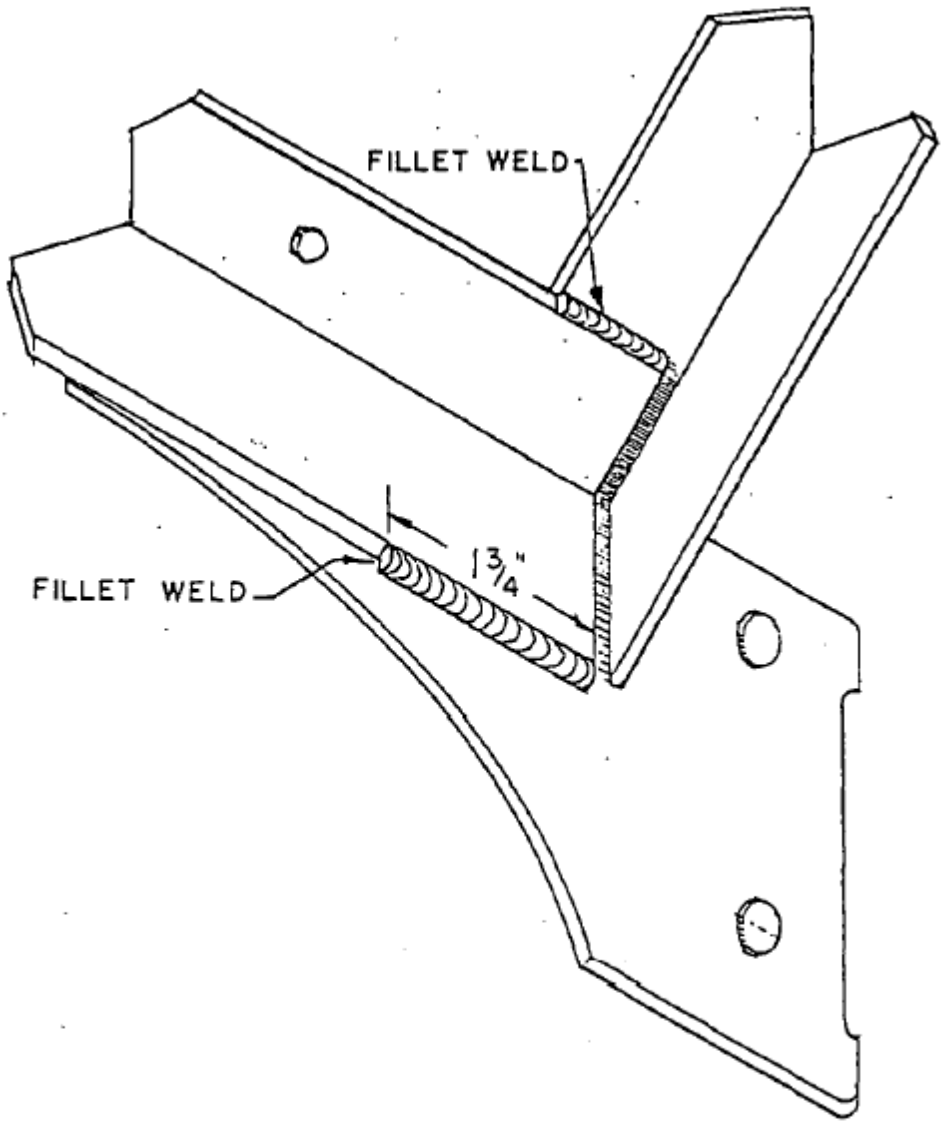


FIGURE 11. Spring frame welding (bottom view).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

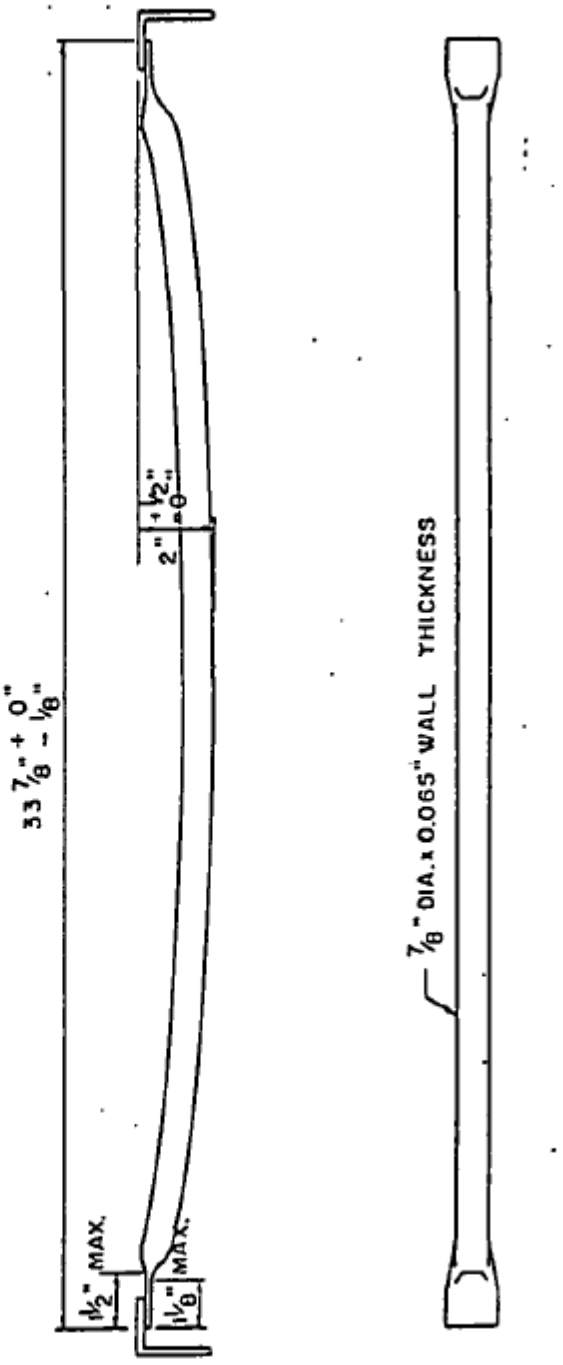


FIGURE 12. Stretcher brace.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

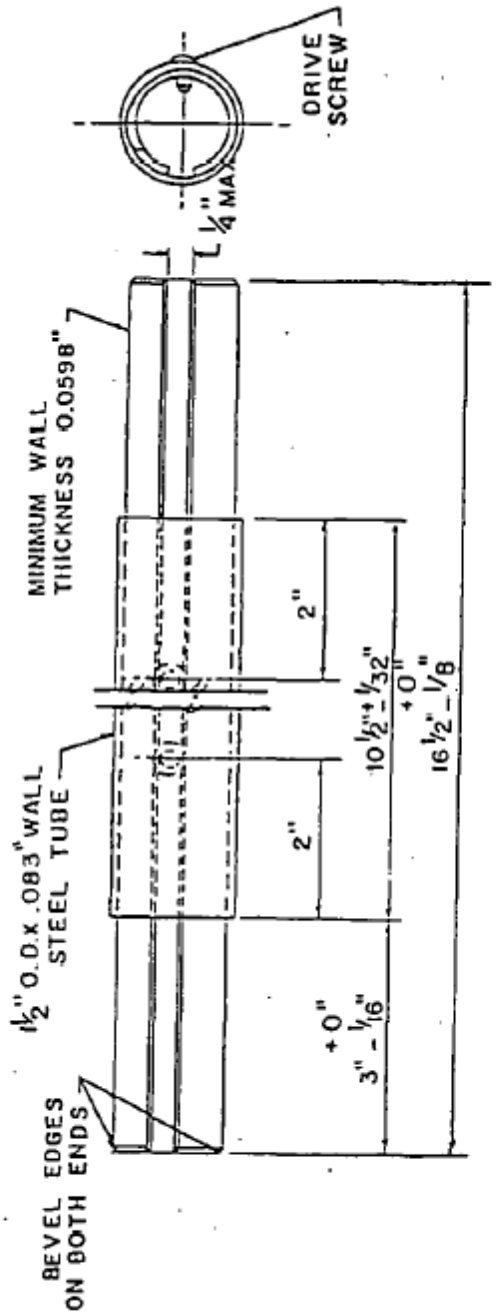


FIGURE 13. Adapter for conversion from single to double-deck bed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.

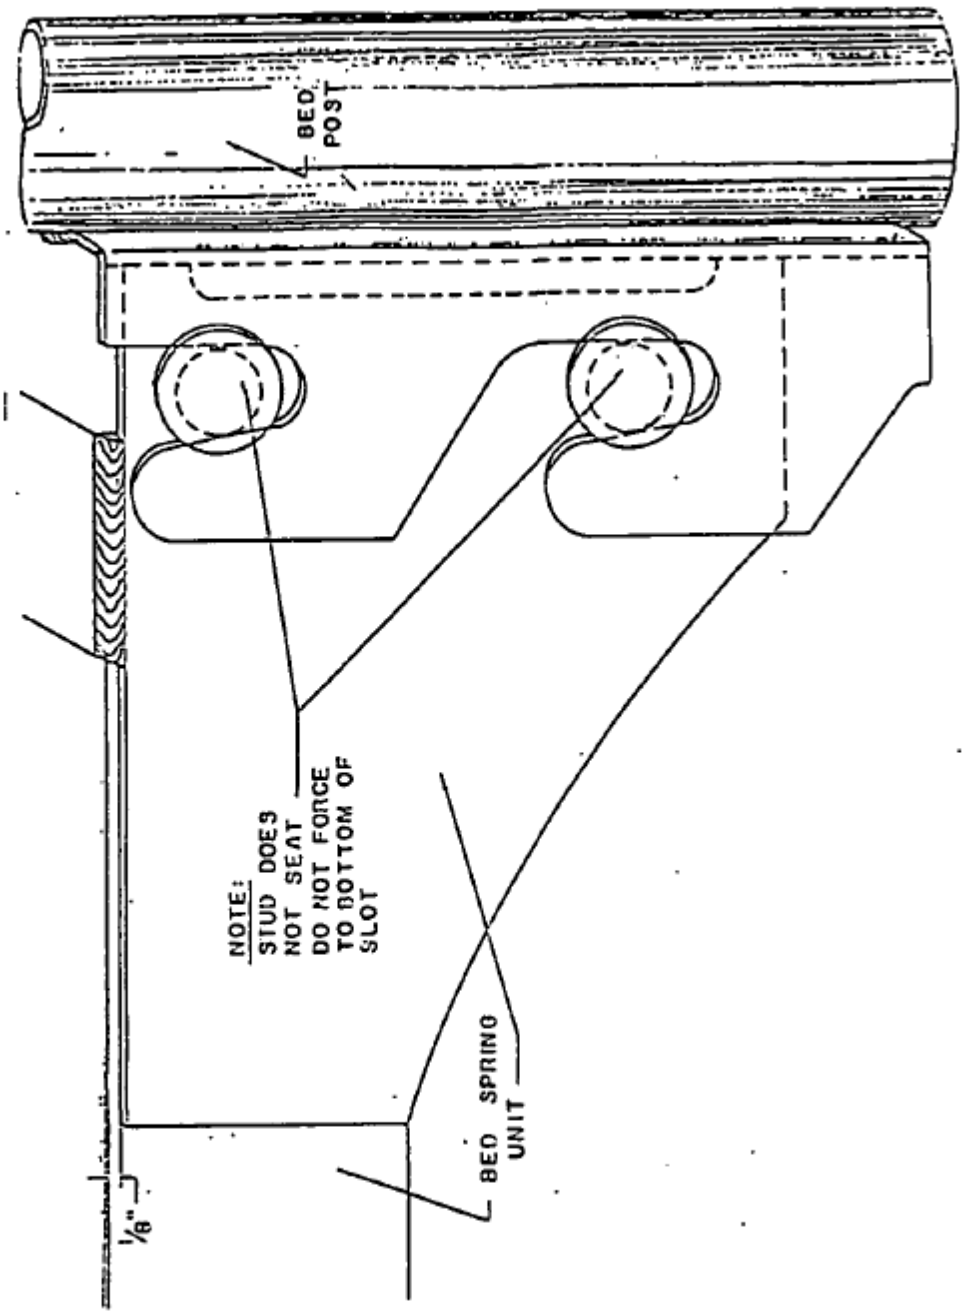


FIGURE 14. Corner lock.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:54Z
Check the source to verify that this is the current version before use.