MILITARY SPECIFICATION

FUSES, STYLE F72

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detailed requirements for fuses style F72.

2. APPLICABLE DOCUMENTS

2.1 The following specification, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-F-15160 — Fuses; Instrument, Power, and Telephone.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

3. REQUIREMENTS

3.1 General requirements. Fuses shall be in accordance with Specification MIL-F-15160, and as specified herein. The electrical and physical requirements shall be as shown in figure 1 and in tables I, II and III.

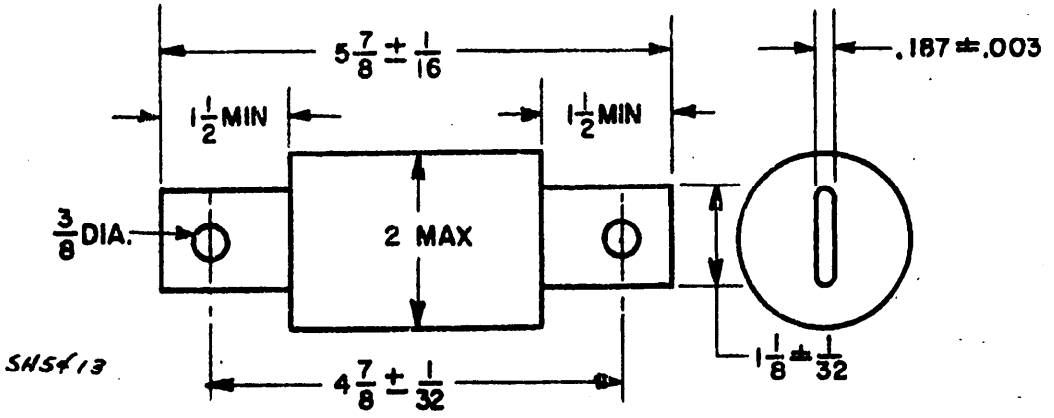


FIGURE 1. *Dimension in inches for Style F72 fuse.*

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:50Z
Check the source to verify that this is the current version before use.

TABLE I. *Physical requirements*

(Nonindicating fuse)	
Case material	Glass Melamine
Knife Blade	Material: Copper Finish: Nickel or Bright Alloy Silver plated when specified.
Terminal strength	5-pound-inch torque

TABLE II. *Electrical requirements*

Voltage rating.....1,000 volts dc		
Characteristic.....C, Normal blowing		
Overload blowing	Percent Nominal rating	Normal blowing time
	135	0–2 hours
Short circuit	5,000 amperes and 68,000 amperes at 1000 volts dc	

TABLE III. *Style, characteristics, current and voltage ratings*

Type designation			
Style	Characteristic	Voltage	Current
F72	C	1,000	125A
F72	C	1,000	150A
F72	C	1,000	200A

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with Specification MIL–F–15160.

4.2 Qualification. Qualification specimens required:

(a) 36 samples maximum current rating of each voltage and design.

(b) 36 samples minimum current rating of each voltage and design.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL–F–15160.

5.1.1 The standard unit package is 1 piece.

6. NOTES

6.1 The notes specified in Specification MIL–F–15160 are applicable to this specification.

6.2 Ordering data required by 6.2 of Specification MIL–F–15160 shall be included in all procurement documents.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:

Army—Signal Corps
Navy—SHIPS
Air Force—DAY

Preparing activity:

Navy—Ships
(Project 5920–0077)

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:50Z
Check the source to verify that this is the current version before use.