
This document has been approved for public release and sale; its distribution is unlimited.

MILITARY SPECIFICATION SHEET

FUSES (INDICATING), STYLE F77A

The complete requirements for procuring the fuses described herein shall consist of this document and the latest issue of Specification MIL-F-15160.

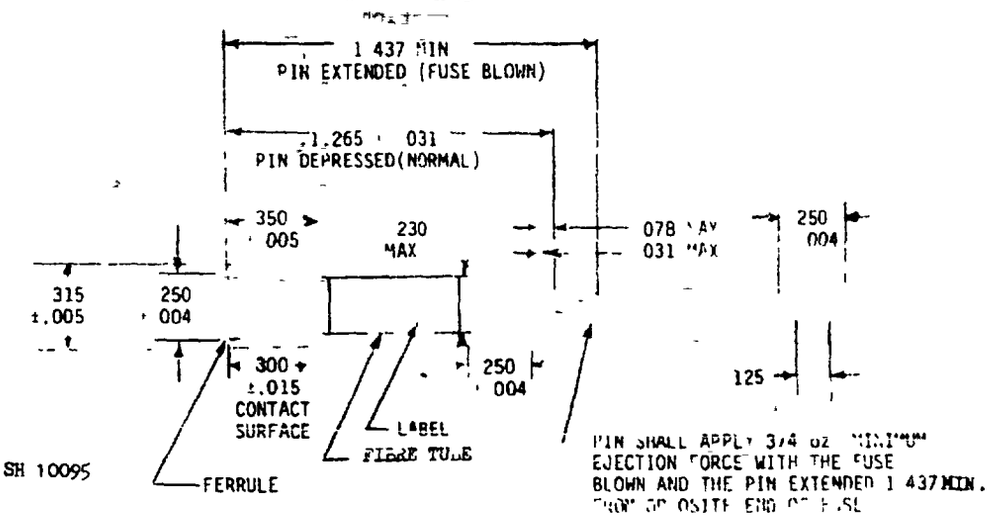

Inches	MM	Inches	MM	Inches	MM	Inches	MM
0.004	0.10	.031	.79	.230	5.84	.315	8.00
.005	.13	.078	1.98	.250	6.35	.350	8.89
.015	.38	.125	3.18	.300	7.62	1.265	32.13
						1.437	36.50

NOTES.
1. All dimensions in inches.
2. Metric equivalents (to the nearest 0.01 MM) are given for information only and are based upon 1 inch = 25.4 MM.

Figure 1 - Style F77A fuses.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction: See figure 1.

Material.

Terminal and indicating pin Brass

Case: Fibre tube.

Physical.

Terminal Ferrule type

Terminal strength: 10 ounce-inch torque between ferrule and fuse body

Electrical.

Current rating See table

Voltage rating: 125 volts, maximum.

Characteristic. A

Overload blowing time: Maximum of 1 hour at 135 percent of rated current

Short circuit alternating current interrupt - Minimum 1000 amperes at 125 volts.

Style, characteristics, voltage and current ratings.

Type Designation			
Style	Characteristic	Maximum Voltage	Current
F77	A	125V	1A
F77	A	125V	2A
F77	A	125V	3A
F77	A	125V	5A
F77	A	125V	8A
F77	A	125V	10A
F77	A	125V	12A
F77	A	125V	15A

Finish:

Terminal: Bright alloy plate.

Indicating pin: Silver plated

Marking label shall be as follows:

MARKING LABEL

F 77 A 125V
AMP
INDICATING FUSE
INSTALL PIN
IN KNOB OF
FUSEHOLDER OR
TOWARDS SIGNAL
BAR OF BLOCK

AMPERE RATING AS APPLICABLE

MFR'S NAME OR SYMBOL

Qualification Sample:

24 samples maximum current rating.

24 samples minimum current rating.

Standard unit package Five fuses.

Preparing activity
Navy - SH
(Project 5920-N149)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION SHEET

FUSES (INDICATING), STYLE F77A

This amendment forms a part of Military Specification Sheet MIL-F-15160/77(SHIPS), dated 16 November 1970, and is approved for use within the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.


PAGE 2

Figure 1: Delete and substitute the attached figure 1.

Preparing activity:
Navy - SH
(Project 5920-N175)

AMSC N/A FSC 5920
DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.

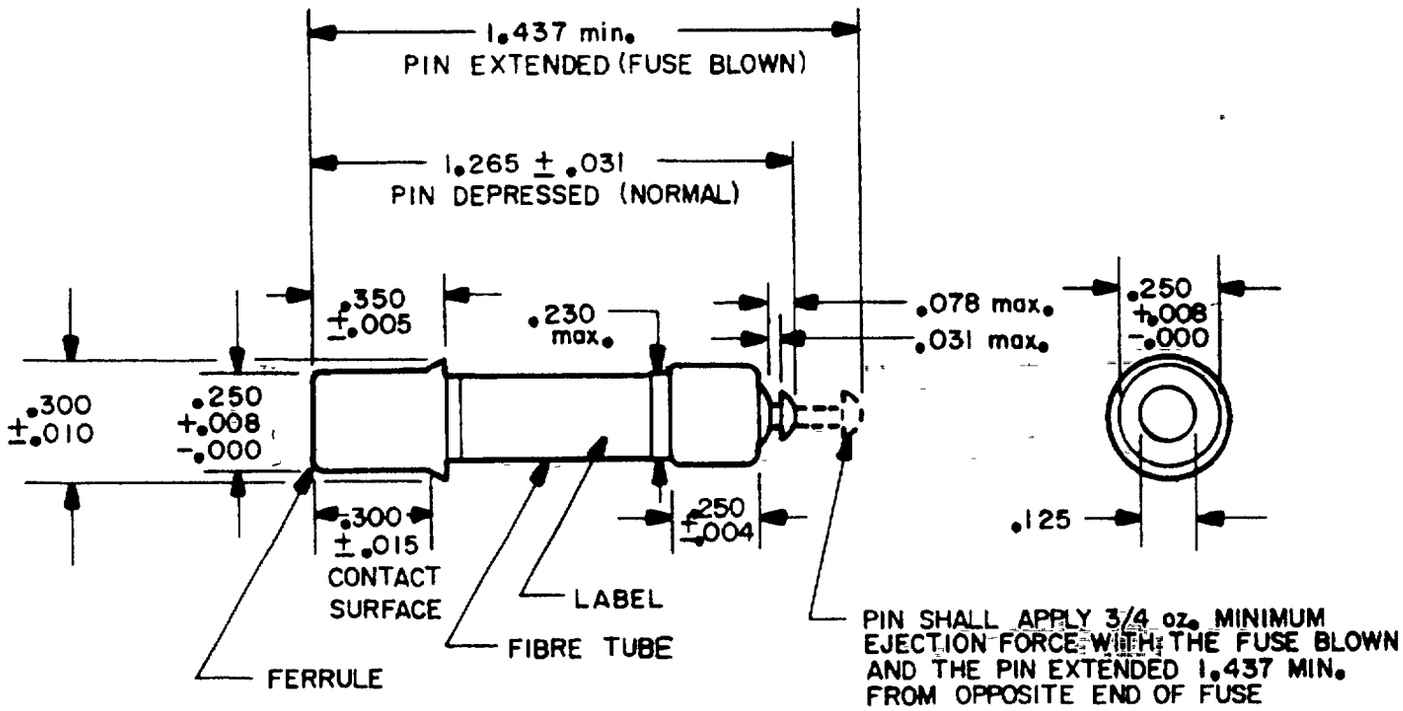

Inches	MM	Inches	MM	Inches	MM	Inches	MM
0.004	0.10	0.031	0.79	0.230	5.84	0.315	8.00
.005	.13	.078	1.98	.250	6.35	.350	8.89
.015	.38	.125	3.18	.300	7.62	1.265	32.13
						1.437	36.50

NOTES.
1. ALL DIMENSIONS IN INCHES.
2. METRIC EQUIVALENTS (TO THE NEAREST 0.01 MM) ARE GIVEN FOR INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.

SH 10095

FIGURE 1. Style F77A fuses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.