INCH-POUND
MIL-PRF-15160/77C
w/AMENDMENT 2
21 September 2026
SUPERSEDING
MIL-PRF-15160/77C
w/AMENDMENT 1
21 March 2017

PERFORMANCE SPECIFICATION SHEET

FUSES, (INDICATING), STYLE F77A

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-15160.

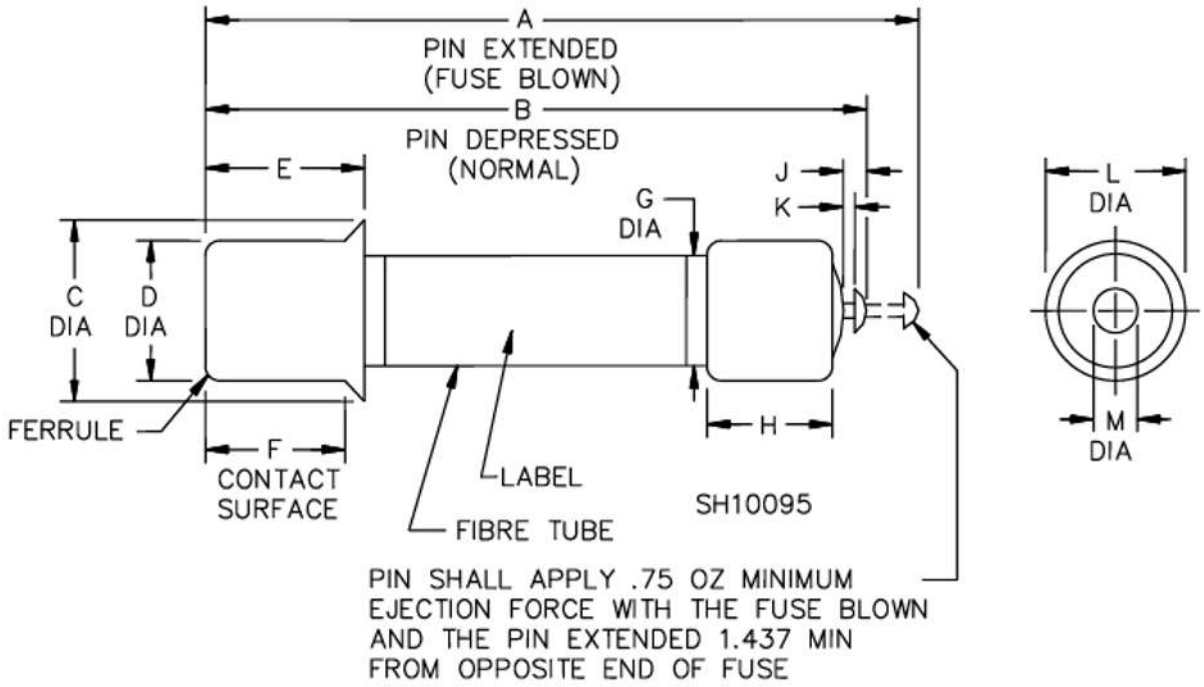


FIGURE 1. Style F77A fuses.

AMSC N/A

FSC 5920

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.

Ltr	Inches		mm	
	Min	Max	Min	Max
A	1.437	---	36.50	---
B	1.234	1.296	31.34	32.92
C	.290	.310	7.37	7.87
D	.246	.254	6.25	6.46
E	.345	.355	8.76	9.02
F	.285	.315	7.24	8.00

Ltr	Inches		mm	
	Min	Max	Min	Max
G	---	.230	---	5.84
H	.246	.254	6.25	6.46
J	---	.078	---	1.98
K	---	.031	---	0.79
L	.246	.254	6.25	6.46
M	.120	.130	3.05	3.30

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Style F77A fuses - Continued.

REQUIREMENTS:

Interface and physical dimensions: See figure 1.

Terminal and indicating pin: Brass.

Case: Fiber tube.

Terminal: Ferrule type.

Terminal strength: 10 inch-ounce torque between ferrules and fuse body and fuse body.

Electrical:

Current rating: See table I.

Voltage rating: 125 volts, maximum.

Characteristic: Characteristic A.

Overload blowing time: Maximum of 1 hour at 135 percent of rated current.

Short circuit alternating current interrupt: Minimum 1,000 amperes at 125 volts.

Finish:

Terminal: Bright alloy plate.

Indicating pin: Silver plated.

Part or Identifying Number (PIN): The PIN shall be constructed from table I (e.g., F77A125V1A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.

TABLE I. Type designation and electrical rating.

Style	Characteristic	Maximum voltage	Current
F77	A	125V	1A
			2A
			3A
			5A
			8A
			10A
			12A
			15A

VERIFICATION:

Qualification inspection is not applicable for this specification sheet and is replaced by acceptance testing which shall consist of group A and group B inspection of MIL-PRF-15160.

Referenced documents. This specification sheet only references MIL-PRF-15160.

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - SH
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC

(Project 5920-2026-015)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:51Z
Check the source to verify that this is the current version before use.