MIL-T-15262D

5 March 1968

SUPERSEDING
MIL-T-15262C
7 January 1966

MILITARY SPECIFICATION

TABLES, WORK

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

☆ 1.1 Scope.- This specification covers work tables with steel or hardboard tops.

☆ 1.2 Classification.- Work tables shall be of the following types and sizes, as specified (see 6.2 and 6.3).

Type I	- Steel construction with steel top
Type III	- Steel construction with hardboard top
Size E	- 4 feet long by 29 inches wide
Size K	- 6 feet long by 29 inches wide
Style A	- With back and end stops
Style B	- Without back and end stops.

2. APPLICABLE DOCUMENTS

☆ 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

FF-N-105	- Nails, Wire, Brads and Staples.
QQ-S-698	- Steel, Sheet and Strip, Low Carbon.
TT-C-490	- Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-485	- Enamel, Semi-Gloss, Rust-Inhibiting.
TT-L-58	- Lacquer, Spraying, Clear and Pigmented (General Use).
TT-P-636	- Primer Coating, Synthetic, Wood and Ferrous Metal.
PPP-B-636	- Box, Fiberboard.
PPP-B-640	- Boxes, Fiberboard, Corrugated, Triple Wall.
PPP-C-650	- Crates, Wood, Open and Covered.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:55Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116 - Preservation, Methods of.

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWING

ARMY NATICK LABORATORIES

5-8-156 - Table, Work.

(Miniature copy of Drawing 5-8-156, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNITED STATES DEPARTMENT OF COMMERCE

Commercial Standard CS 251-63 - Hardboard

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D.C. 20402.)

3. REQUIREMENTS

* 3.1 Preproduction sample.- When specified (see 6.2), before production is commenced, a sample of the work table covered by this specification shall be submitted or made available to the contracting officer or his authorized

Source: https://assist.dla.mil -- Downloaded: 202640-18T05:55Z
Check the source to verify that this is the current version before use.

representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production work table.

* 3.2 Standard product.- The work table covered by this specification shall be the standard commercial product of the manufacturer except for changes necessary to comply with the specification requirements.

* 3.3 Materials.- Materials not definitely specified shall conform to the quality normally used for the purpose in standard industry practice.

* 3.3.1 Steel, sheet, low carbon.- The low carbon steel sheet shall conform to hot or cold rolled, commercial quality of QQ-S-698.

* 3.3.2 Hardboard.- The hardboard shall conform to tempered type, smooth one side of Commercial Standard CS 251-63.

* 3.3.3 Primer.- Primer shall conform to TT-P-636.

* 3.3.4 Enamel.- Enamel shall conform to TT-E-485. Unless otherwise specified (see 6.2), the color shall be olive drab No. X24087 of Fed. Std. No. 595.

* 3.3.5 Lacquer.- Lacquer shall conform to type I, class 2 of TT-L-58.

* 3.4 Construction.- The work tables shall conform to the design shown on Drawing 5-8-156 and as specified herein. The assembled table shall have no permanent indentation, damage or deflection to exceed 0.080 inch when tested as specified in 4.4.2.

* 3.4.1 Welding.- Surfaces to be welded shall be cleaned and free of rust, scale, corrosion, grease and other foreign matter.

* 3.4.2 Steel components.- The leg assemblies, shelf, top, stringer, back and end stops (when specified), end inserts, and drawer for the table shall be fabricated from the steel specified in 3.3.1.

* 3.4.2.1 Leg assembly.- The leg assembly shown on Drawing 5-8-156 shall be all welded construction except that the feet of the table, when not an integral part of the legs, may be bolted to the legs. The leg assembly shall be designed for assembly of work tables in single or multiple units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

* 3.4.2.2 Table drawer.- Each work table shall be provided with a steel drawer inclosed in a carrier case. The inside drawer size shall be 14 inches long by 20 inches deep by 5 inches high, plus or minus 7/8 inch, and equipped with a padlock attachment (padlock not required). The drawer shall operate on ball bearing rollers or nylon rollers within the carrier case. Automatic stops shall be provided to prevent the drawer from accidentally coming out when it is pulled to the extended position, but shall permit the drawer to be removed intentionally. The drawer shall be of the inclosed type, including side mounting fixtures. The fixtures shall be drilled and attached to the underside of the table tops. The gage thickness of the drawer and the mounting fixtures shall be in accordance with the manufacturer's commercial practice.

* 3.4.2.3 Shelf.- The shelf for the work tables shall be flanged in front and back, or reinforced in accordance with the manufacturer's commercial practice. The width of the shelf shall be not less than two-thirds of the inside dimension of the cross member supporting the shelf.

* 3.4.3 Top, hardboard.- The hardboard for the table top shall conform to 3.3.2, and shall be securely bonded with an adhesive to the steel top in accordance with the manufacturer's commercial practice, and without the use of screws. The hardboard shall be nominal 3/16 inch thick.

* 3.4.4 End insert.- The end inserts for the work table shall be bolted or welded. When the end insert is bolted to the steel top, the heads of the bolts shall be countersunk and the heads shall be flush with the surfaces.

* 3.4.5 Hardware.- All miscellaneous hardware, such as screws, bolts, nuts and lockwashers shall be zinc or cadmium plated in accordance with the manufacturer's commercial practice.

* 3.5 Finish.-

* 3.5.1 Steel components.- Prior to assembly, the steel components shall be pretreated for painting in accordance with any method or type of TT-C-490.

* 3.5.1.1 Priming.- After pretreatment, the steel components shall be given a coat of primer specified in 3.3.3. The priming coat may be omitted, provided the dry film thickness of the enameling coat specified in 3.5.1.2 averages not less than 1.0 mil, and no reading is less than 0.7 mil.

* 3.5.1.2 Enameling.- After priming specified in 3.5.1.1, the steel components shall be given a coat of enamel specified in 3.3.4.

* 3.5.2 Hardboard top.- The hardboard top, after assembly to the steel top, shall be given two coats of lacquer specified in 3.3.5.

* 3.6 Identification marking.- The work tables shall be marked with the manufacturer's identification or readily identifiable trademark.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

* 3.7 Assembly.- Components of the work tables shall have holes drilled or punched for easy assembly with screws, bolts, nuts and lockwashers as applicable. The work table shall not be out of level more than 1/16 inch when tested as specified in 4.4.1.

* 3.7.1 Assembly instructions.- One set of comprehensive assembly instructions shall be furnished with each table.

* 3.8 Workmanship.- All surfaces shall be free from burrs, slivers, rough or sharp edges. Components shall not be broken, cracked, split or malformed. All the welds shall be smooth and free from pits, flashes, cracks and burn through. The enameled surface shall be smooth, uniform and free of runs, wrinkles, grit and areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking or blistering.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for defects in table II, dimensions specified, and tested in accordance with 4.4.1 and 4.4.2.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material.- In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 In process examination.- Examination shall be made during the manufacturing process for requirements specified in table I. Whenever non-conformance is noted, correction shall be made to affected items in process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

TABLE I.- In process examination

Requirement	Requirement paragraph
Surfaces cleaned prior to welding	3.4.1
Pretreatment	3.5.1
Priming when applicable	3.5.1.1

4.3.3 Inspection of the end item.- The lot shall consist of all tables of one type, size, and style offered for inspection at one time. The sample unit for this inspection shall be one table.

* 4.3.3.1 Visual examination.- Examination shall be made of the end item for the defects in table II. The inspection level shall be level II with an acceptable quality level (AQL) of 4.0 for major defects, and 10.0 for total defects, expressed in terms of defects per hundred units.

TABLE II.- Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish, all metal parts	Not as specified.	X	
	Color not as specified.		X
	Area of no film.		X
	Contains streaks, runs, drops, grit, or wrinkles.		X
	Not continuous or is not smooth and uniform.	X	
	Evidence of peeling, flaking or blistering.		X
Finish, hardboard top	Dust, grease or other foreign matter imbedded in finish.		X
	Surfaces not coated with lacquer as required.		X
Construction and workmanship (general)	Part missing, broken, split, fractured, cracked or malformed.	X	
	Bolt, nut, screw, or lockwasher, as applicable, missing.		X
	Any sharp or protruding edges.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

TABLE II.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Tops	Not steel, or hardboard on steel as specified.	X	
	Hardboard top not securely bonded to steel top without aid of screws.	X	
Legs	Not provided with feet.	X	
	Cross member of legs missing.	X	
Drawer	Not inclosed in a carrier case.	X	
	Ball bearing roller or nylon rollers not provided.	X	
	Not equipped with padlocking attachment.		X
	Not inclosed type.		X
	Not equipped with a stop to prevent drawer from coming out when pulled to the extended position.	X	
Shelf	Not flanged or reinforced - front and rear.		X
Identification marking	Incorrect, omitted, or not as specified.		X
Assembly instructions	Missing, illegible, or not comprehensive.	X	

* 4.3.3.2 Assembly examination.- Examination shall be made of a table for defects in assembly and fit of components for compliance with 3.4.2.1, 3.4.2.2, and 3.7 when tested as specified in 4.4.1. The inspection level for this examination shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.3.3 Dimensional examination.- Examination shall be made of tables for compliance with dimensions specified. Any noncompliance shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that preservation, packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table III. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:55Z
Check the source to verify that this is the current version before use.

TABLE III.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Preservation	Improperly applied or missing.
Materials	Any component missing or damaged.
Contents	More than one table per crate.

* 4.3.4.1 Examination for blocking and bracing of shipping containers.- When shipping containers are required to be in accordance with PPP-C-650, examination for defects in blocking and bracing of contents, and strapping of containers shall be in accordance with the appendix of that specification.

4.4 Tests.-

* 4.4.1 Level test.- Assemble a single work table. Do not bolt the legs to floor surface. The table shall then be placed on a flat level surface and alternately rocked at diagonally opposite corners. The distance from floor surface to the table top shall then be measured to determine compliance with 3.7.

* 4.4.2 Static load test.- On an assembled table, 800 pounds shall be placed on the center of the table top over an area not to exceed one square foot. The table shall remain loaded for a period of not less than 8 hours and then examined for compliance with 3.4.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.- Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.-

* 5.1.1.1 Preservation.- The steel roller bearings shall be lubricated to capacity with the manufacturer's recommended lubricant containing a rust inhibitor. All ferrous metal fastening devices, such as nuts, bolts, or screws, shall be cleaned process C-1, thoroughly dried, and coated with type P-1 preservative in accordance with MIL-P-116.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

* 5.1.1.2 Packaging.- Each table shall be packaged knocked down. Removable bearings shall be detached from the drawer, and together with connecting hardware preserved as specified in 5.1.1.1, shall be packaged in a cloth drawstring bag or paper box and placed in the drawer together with the assembly instructions sheet. Fiberboard pads shall be placed between the drawer and carrier case to prevent movement of the drawer when drawer bearings have been removed. The drawer and carrier case assembly, with drawer in closed position, shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF or SF, class domestic or weather-resistant, variety SW of PPP-B-636 (see 5.2.1). Painted surfaces on the front of the drawer and carrier case shall be covered with cushioning material, as necessary, to prevent contact with the inner surfaces of the fiberboard box. Each hardboard table top shall be packaged in a fiberboard box as specified herein, except that the style shall be FPF. Closure of domestic class boxes shall be as specified in the appendix of PPP-B-636. Weather-resistant class boxes shall be closed and waterproofed by means of tape in accordance with the appendix of PPP-B-636.

5.1.2 Level C.- Each table shall be preserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

* 5.2.1 Level A.- Each table, preserved and packaged as specified in 5.1, shall be packed in a crate conforming to type II, style A of PPP-C-650. Interior boxes shall be weather-resistant class as specified in 5.1.1.2. The table top shall be positioned first with top side facing up within the crate. The leg assemblies, shelf, stringer, back and end stops when supplied, and the carrier case assembly shall then be compactly arranged over the table top. Contents shall be braced, blocked, or strapped and cushioned in accordance with the appendix of PPP-C-650. Cushioning material shall be used to prevent metal to metal contact between the table components, and areas where painted components contact blocking and bracing, and strapping. Each crate exceeding 250 pounds gross weight shall be provided with nominal 2- by 4-inch skids laid flat, positioned paralled to the ends, and extending the full exterior width of the crate. Skids shall be placed one under each end cross member, flush with the inside edge, and under each intermediate cross member. The bottom cross members of crates less than 30 inches wide and exceeding 250 pounds gross weight shall be nominal 1- by 6-inch lumber with one edge of top and bottom cross members in alignment. When width dimensions of top and bottom intermediate cross members differ, the skids shall be flush with the unaligned edge of the bottom cross member. The ends of the skids shall be beveled one-half the thickness at a 45 degree angle. Skids shall be secured by nailing through the bottom cross members and skids with 2-1/4 inch long, type II, style 18 pallet nails conforming to FF-N-105. Nails fastening the skids shall be arranged in

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

two rows in a staggered pattern, with spacing between nails in each row to be not more than 6 inches. Each row of nails shall be approximately 1/2 inch in from the edge of the skid. The nailing pattern shall begin and end approximately 1-1/2 inches in from the ends of each skid. Closure and strapping shall be in accordance with the appendix of PPP-C-650, strapping positioned alongside the skids.

* 5.2.2 Level B.- Each table, preserved and packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that interior boxes may be class domestic, as specified in 5.1.1.2. Cushioning material need not be water-resistant. Alternative to a crate, the shipping container may be a triple wall fiberboard box conforming to class 1, style F of PPP-B-640.

5.2.3 Level C.- Each table, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The tables covered by this specification are intended to be general purpose work tables for use in various repair and maintenance shops.

* 6.2 Procurement data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Title, size and style required (see 1.2).
(c) When preproduction sample is required (see 3.1).
(d) Color, if other than specified (see 3.3.4).
(e) Selection of applicable levels of preservation and packaging, and packing (see 5.1 and 5.2).

* 6.3 Deletion data.- Type II and sizes A, B, C, D, F, G, H, I, J and L of types I and III have been deleted from this specification, since they are no longer required.

* 6.4 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:55Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Air Force - 84

Review activities:

Army - WC
Air Force - 84, 85

User activity:


Army - CE

Preparing activity:

Army - GL

Project No. 7195-0044

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

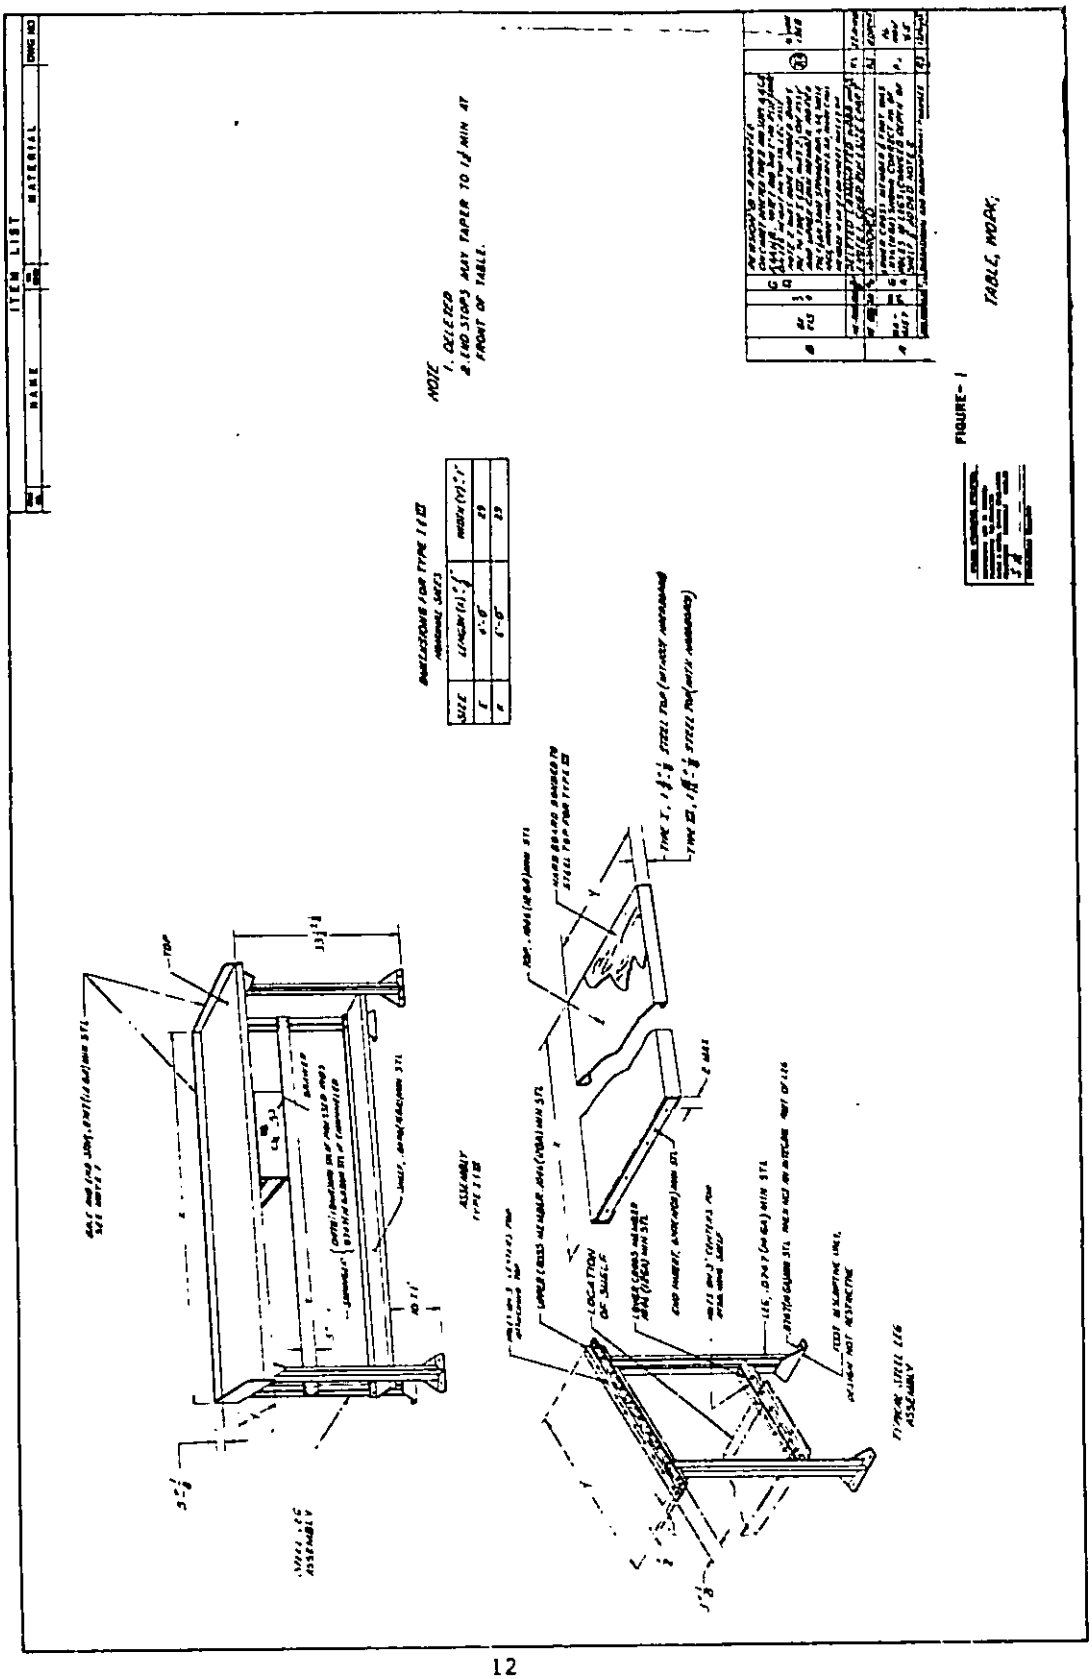

Source: https://assist.dla.mil -- Downloaded: 202610-18T05:55Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation.

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T05:55Z
Check the source to verify that this is the current version before use.