INCH-POUND
MIL-PRF-62366B(AT)
2 December 1996
SUPERSEDING
MIL-R-62366A(AT)
24 October 1985

PERFORMANCE SPECIFICATION

RING ASSEMBLIES, ELECTRICAL CONTACT

This specification is approved for use by the U.S. Army Tank-automotive and Armaments Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification defines the requirements for two electrical contact ring assemblies, referred to herein as "slip ring assemblies", for use on military ground vehicles (see 6.1).

1.2 Classification. The slip ring assemblies covered by this specification will be of the following classes, as specified in table I (see 6.2).

TABLE I. Classification of slip ring assemblies.

Class	Number of rings			
	Control			
	Power	Signal	Data	Shield
I	2	15		
II	6	11	16	5

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A FSC 2590

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 3 and 4 of this specification. This section does not include documents in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirement documents cited in sections 3 and 4 of this specification, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplements thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

DEPARTMENT OF DEFENSE

MIL-H-6083	- Hydraulic Fluid, Petroleum Base, for Preservation and Operation.
MIL-W-16878/12	- Wire, Electrical, Fluorinated Ethylene Propylene (FEP) Insulated, 200 Deg. C, 1000 Volts.
MIL-C-22750	- Coating, Epoxy, High Solids.
MIL-W-22759/6	- Wire, Electrical, Fluoropolymer-Insulated, Abrasion Resistant Extruded TFE, Nickel-Coated Copper Conductor, 600 Volt.
MIL-W-22759/7	- Wire, Electrical, Fluoropolymer-Insulated, Abrasion Resistant Extruded TFE, Nickel-Coated Copper Conductor, 600 Volt.
MIL-G-23827	- Grease, Aircraft and Instruments, Gear and Actuator Screw.
MIL-C-27500	- Cable, Power, Electrical and Cable Special Purpose, Electrical Shielded and Unshielded General Specification For.
MIL-H-46170	- Hydraulic Fluid, Rust Inhibited, Fire-Resistant, Synthetic Hydrocarbon Base.
MIL-W-81044/6	- Wire, Electric, Crosslinked Polyalkene Insulated, Tin-Coated Copper, Normal Weight, 600-Volt, 150 Deg. C.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the current version before use.

MIL-W-81044/8	- Wire, Electric, Crosslinked Polyalkene Insulated, Silver-Coated Copper, Medium Weight, 600-Volt, 150 Deg. C.
MIL-W-81044/9	- Wire, Electric, Crosslinked Polyalkene Insulated, Tin-Coated Copper, Medium Weight, 600-Volt, 150 Deg. C.
MIL-W-81044/12	- Wire, Electric, Crosslinked Polyalkene Insulated, Tin-Coated Copper, Light Weight, 600-Volt, 150 Deg. C.

STANDARDS

FEDERAL

FED-STD-595	- Colors used in Government Procurement.

DEPARTMENT OF DEFENSE

MIL-STD-108	- Definitions of Basic Requirements for Enclosures for Electronic Equipment.
MIL-STD-202	- Test Methods for Electronic and Electrical Component Parts.
MIL-STD-810	- Environmental Test Methods and Engineering Guidelines.
MIL-STD-1275	- Characteristics of 28 Volt DC Electrical Systems in Military Vehicles.
MS90726	- Screw, Cap, Hexagon Head (Finished Hexagon Bolt), Steel, Grade 5, Cadmium Plated, UNF-2A.

(Unless otherwise indicated, copies of the above specifications and standards are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.)

2.2.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

ARMY

12265512	- Ring, Electrical Contact (M901).
12310155	- Slip Ring Assembly, Electrical Contact (M981).

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the current version before use.

(Copies of these drawings are available from the U.S. Army Tank-automotive and Armaments Command, AMSTA-TR-E/BLUE, Warren, MI 48397-5000.)

2.3 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASQC Z1.4 - Sampling Procedures and Tables for Inspections by Attributes (DoD Adopted).

(Application for copies should be addressed to American National Standards Institute, 11 West 42nd Street, New York, NY 10036.)

SOCIETY OF AUTOMOTIVE ENGINEERS, INC. (SAE)

SAE/AS1933 - Age Controls for Hose Containing Age-Sensitive Elastomeric Material (R1991) (DoD Adopted).

(Application for copies should be addressed to Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096.)

2.4 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a first article sample shall be subjected to first article inspection in accordance with 4.2.

3.2 Materials. Materials used shall be in accordance with the manufacturer's materials specifications for slip ring assemblies. The materials shall be capable of meeting all of the operational and environmental requirements specified herein (see 4.7.1). Recovered materials shall be used to the maximum extent practicable.

3.2.1 Metals. All metals used in the slip ring assembly shall be of corrosion resistant type or shall be suitably protected to resist corrosion during the life of the assembly. The use of dissimilar metals shall be avoided, unless suitably treated to resist galvanic corrosion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.2.1.1 Castings. If castings are used, the casting material, type, and quality shall be as specified in the contract or order (see 6.2).

3.2.2 Nonmetals. All nonmetals shall be suitable for their intended purpose during the normal service life of the slip ring assembly. Nonmetals shall be nonflammable, fungus inert, and insulating. Use of elastometrics shall be governed by the age controls of SAE/AS1933.

3.2.3 Flammable materials. Materials which may be ignited or exploded by an electrical spark shall not be utilized. Flammable impregnating and potting compounds may be used if they are enclosed in fire resistant containers.

3.2.4 Toxic materials. Materials which produce harmful toxic effects under conditions of enclosed spaces, including fire, shall not be used.

3.2.5 Insulating materials. All insulating materials shall have high arc resistance and low moisture absorption.

3.3 Design and construction.

3.3.1 Physical characteristics.

3.3.1.1 Configuration. The slip ring assembly shall be fabricated and assembled in accordance with drawings, parts lists, and other documents listed on the assembly drawings of 3.3.1.1.1 and 3.3.1.1.2 below (see 4.7.1 and 4.7.2).

3.3.1.1.1 Class I. Drawing 12265512.

3.3.1.1.2 Class II. Drawing 12310155.

3.3.1.2 General description. The slip ring assembly shall consist of a housing and mounting base assembly, a brush block and terminal assembly, and a rotor assembly (see 4.7.1).

3.3.1.2.1 Housing and mounting base assembly. A housing and mounting base assembly with seals shall provide a splash proof enclosure and suitable mounting provisions.

3.3.1.2.2 Brush block and terminal assembly. A brush block and terminal assembly shall consist of two spring loaded brushes per ring with barriers which will positively retain the brushes in the conducting area under the conditions of vibration and shock specified in this document.

3.3.1.2.3 Rotor assembly. The rotor assembly shall be mechanically retained internally to prevent axial motion relative to the housing. The number and type of rings shall be as specified below.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.3.1.2.3.1 Power rings. Power rings shall transmit direct current (dc) power as specified herein without loss or degradation of performance.

3.3.1.2.3.1.1 Class I. Two rings, designated as numbers 1 and 2, shall transmit power.

3.3.1.2.3.1.2 Class II. Six rings, designated as numbers 33 through 38, shall transmit power.

3.3.1.2.3.2 Control rings. Control rings shall be provided to transmit control signals as specified herein without loss or degradation of performance.

3.3.1.2.3.2.1 Class I. Fifteen rings, designated as numbers 3 through 17, shall transmit control signals.

3.3.1.2.3.2.2 Class II. Thirty-two rings, designated as numbers 1 through 32, shall transmit control signals. Eleven control rings, numbered 1 through 6 and 8 through 12, shall provide discrete control. Sixteen control rings, numbered 14 through 19, 21 through 26, and 28 through 31, shall be capable of digital data transmission.

3.3.2 Component parts.

3.3.2.1 Sealed bearings. Bearings shall be packed with grease conforming to MIL-G-23827 or commercial equivalent and, filled at least 80 percent (%). The bearings shall be thoroughly cleaned before the lubricant is injected into the bearings. Bearings shall not have been lubricated more than 12 months prior to the date of delivery of the bearings under the contract or purchase order (see 4.7.1).

3.3.2.2 Seals. Seals shall be compatible with MIL-H-6083, MIL-H-46170, hydraulic fluids, or commercial equivalent, and water (see 4.7.1).

3.3.2.3 Sheathed leads. The sheathed leads shall withstand a 60 pound (lb) maximum pull test applied in any direction for 1 minute (min) at the point where the leads exit from the slip ring assembly (see 4.7.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.3.2.4 Hookup wire. The hookup wire shall be as specified below (see 4.7.1).

3.3.2.4.1 Class I. See table II.

3.3.2.4.2 Class II. See table III.

TABLE II. Hookup wire requirements (Class I).

Pin number	Wire type and size	Alternate wire type and size
A, B, D, E, F, G	M27500-16RC2S05	M27500-16ME2T08
H, I, J, K, L, M, U, V	M27500-16RC4S05	M27500-16ME4T08
P, T, R	M22759/7-6	M16878/12-KK-8 or M81044/6-8
W, X	M22759/7-6	M16878/12-KK-4 or M81044/6-12
C, O	Shield return	Shield return

TABLE III. Hook up wire requirements (Class II).

Connector	Pin number	Wire type and size
J1	A D	2 - # 6 Braided
	B C E F	M81044/6-8-9
J2	A, B, C, D, E, F, J, K, L, M, P, R, S, T, U, V, X, Y, Z, a, b, c, e, f, g, h	M27500-20ML2T08
	H	M27500-20ML1T08
	G N W d j	Shield return

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.4 Performance.

3.4.1 Mechanical.

3.4.1.1 Starting torque. The torque required to initiate motion of the rotor assembly shall not exceed 62.5 pound-force inch (lbf-in) (see 4.7.3.1).

3.4.1.2 Operation. The slip ring assembly shall operate smoothly and continuously during direction reversal prior to the completion of 1 revolution (see 4.7.3.2).

3.4.1.3 Normal speed. The slip ring assembly shall operate at a speed of 7.5 revolutions per minute (rpm) continuously (see 4.7.3.2).

3.4.1.4 Maximum speed. The slip ring assembly shall not be damaged nor shall its performance be degraded during or after intermittent rotation at 12 rpm (see 4.7.3.3).

3.4.1.5 Stopping. The slip ring assembly shall not be damaged nor its performance degraded when the rotor is brought from a rotational speed of 7.5 rpm to a complete stop in no more than 0.25 ± 0.05 seconds (s) (see 4.7.3.2).

3.4.1.6 Static limit load capacity. The slip ring assembly, including the base, shall be capable of transferring each of the load combinations listed below without deteriorating electrical performance and without permanent structural deformation. The loads listed below shall be applied in the coordinate system defined in figure 1 (see 4.7.3.4).

a. 1000 lbs vertically (down) applied combined with 350 lbs horizontally applied to the slip ring assembly to produce a torque of 6000 lb-in about any axis in the horizontal plane.
b. 500 lbs applied along any axis in the horizontal plane.
c. 200 lbs vertically (up) applied along the z-axis.

3.4.2 Electrical.

3.4.2.1 Power rings.

3.4.2.1.1 Transient voltage. The power rings shall function and meet the performance requirements of this specification with maximum input voltage for fault free, battery only, conditions and single fault conditions as specified in MIL-STD-1275. The power rings shall withstand maximum transient voltages permitted by sections 6.2.3 and 6.2.4 of MIL-STD-1275. The maximum steady state voltage applied to the power rings will not exceed 33 volts (V) (see 4.7.3.5.1).

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:38Z
Check the source to verify that this is the currentversion before use.

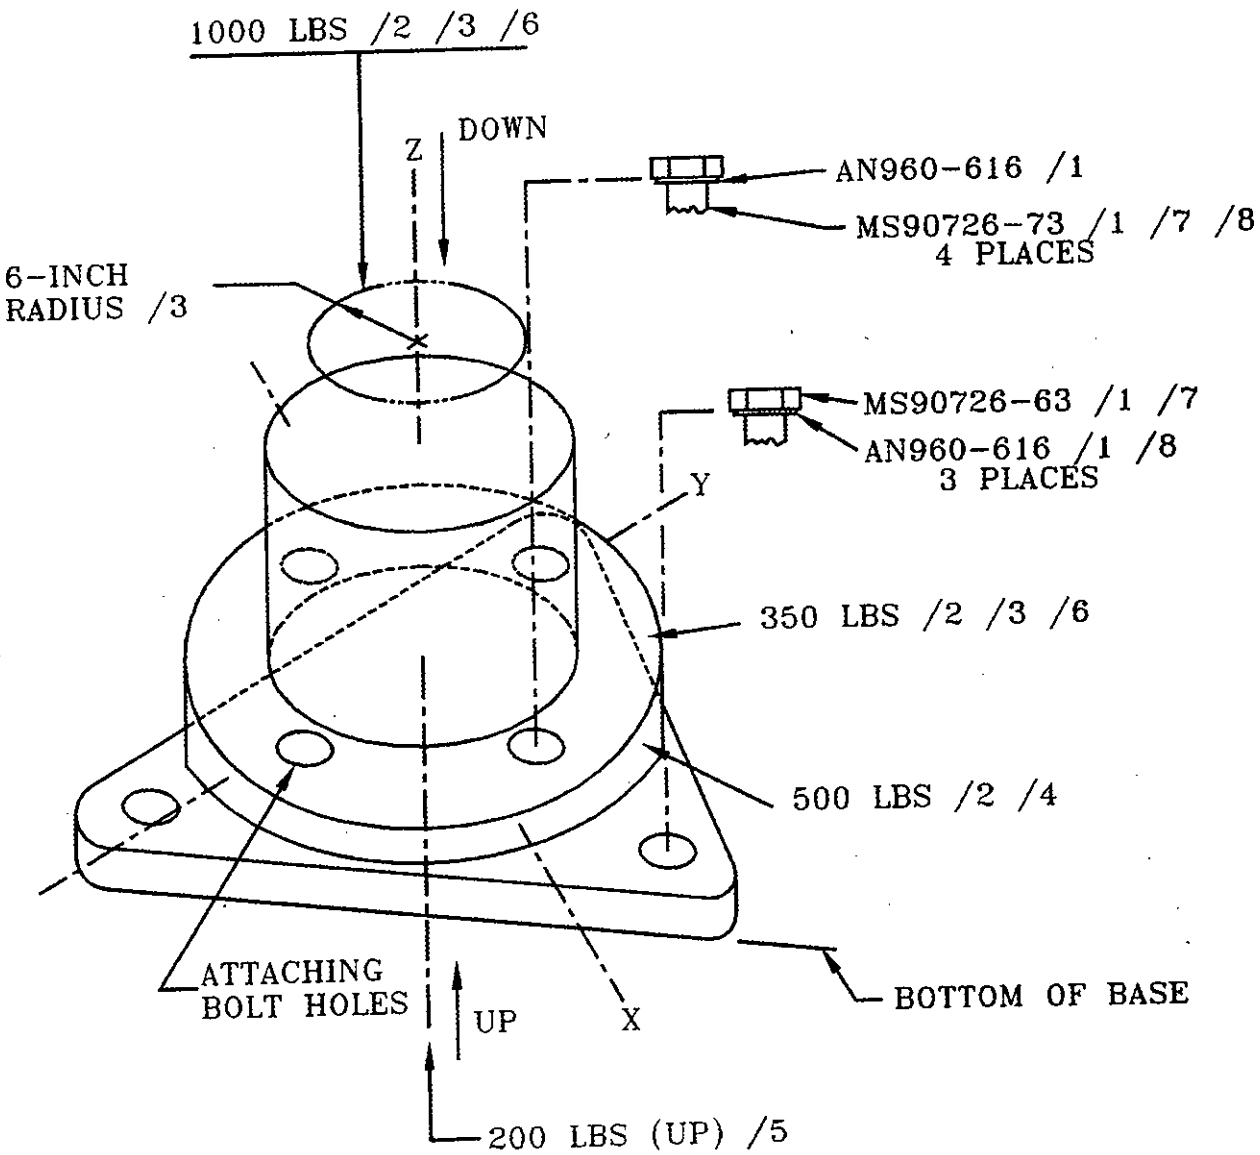


FIGURE 1. Coordinate system, slip ring assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

NOTES:

1. Or commercial equivalent.
2. Apply to surface indicated, 2.34 in. above base. Load to be applied via attaching bolt holes.
3. Combined load case A.
4. Load case B.
5. Load case C.
6. Combined load applied 180° apart.
7. Screw length may be altered provided that suitable engagement of mating nut is maintained.
8. Torque to 180-190 lb-in.
9. The Z axis is designated as vertical.
10. All axes within the x-y plane are designated as horizontal.

FIGURE 1. Coordinate system, slip ring assembly - Continued.

3.4.2.1.2 Current.

3.4.2.1.2.1 Class I. The power rings shall transmit a current of 190 amperes (A) continuously with surges of 500 A for 20 milliseconds (ms) (see 4.7.3.2.1 and 4.7.3.5.2.1).

3.4.2.1.2.2 Class II. Rings 37 and 38 shall be high power rings which shall transmit a current of 190 A continuously with surges of 500 A for up to 20 ms. Rings 33 through 36 shall be low power rings which shall transmit up to a current of 50 A continuously with surges of 70 A for up to 20 ms (see 4.7.3.2.2 and 4.7.3.5.2.2).

3.4.2.2 Control rings.

3.4.2.2.1 Transient voltage. The control rings shall function and meet the performance requirements of this specification with maximum input voltage for fault free, battery only, conditions and single fault conditions as specified in MIL-STD-1275. The steady state voltage will be less than 33 V. The control ring shall be capable of transmitting Transistor-Transistor Logic (TTL) levels of 0.0 ± 0.5 V dc (low) and 2.5 ± 0.5 V dc (high) (see 4.7.3.6.1).

3.4.2.2.2 Current.

3.4.2.2.2.1 Class I. The control rings shall transmit a current of 7A continuously with surges of 10 A allowed for not greater than 40 s, surges of 50 A allowed for not greater than 3 s, and surges of 100 A for not greater than 0.8 s (see 4.7.3.2.1 and 4.7.3.6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.4.2.2.2.2 Class II. The control rings shall transmit current as specified in 3.4.2.2.2.1. The data rings shall transmit current at frequencies of between 100 kilohertz (kHz) and 1 megahertz (mHz) (see 4.7.3.2.2 and 4.7.3.6.2).

3.4.2.2.3 Capacitance. The capacitance of each control circuit, between each conductor and its shield, with the shield and the slip ring assembly housing connected to ground, shall not exceed 600 picofarads (pF) (see 4.7.3.6.3).

3.4.2.2.4 Noise. Control ring noise level shall not exceed 400 microvolts (uV) peak to peak measured across any two ring leads with all brush leads shorted together. For test purposes, 5 milliamperes (mA) shall be passed through the rings being measured with the ring rotated at 8 rpm (see 4.7.3.6.4).

3.4.2.3 Common requirements for power and control rings.

3.4.2.3.1 Dielectric withstanding voltage. The slip ring assembly shall be capable of withstanding 500 volts root mean square (V rms), 60 hertz (Hz), for 15 s between mutually insulated points without damage or subsequent performance degradation (see 4.7.3.7.1).

3.4.2.3.2 Insulation resistance. The insulation resistance between each two circuits and between each circuit and the case shall be not less than 100 megohms (MΩ) at 100 V dc at 50 to 60% relative humidity (see 4.7.3.7.2).

3.4.2.3.3 Resistance. The pin to pin resistance at 77 degrees Fahrenheit (°F) through each ring shall be as specified below (see 4.7.3.7.3).

3.4.2.3.3.1 Class I. See table IV.

3.4.2.3.3.2 Class II. See table V.

TABLE IV. Pin to pin resistance (Class I).

Receptacle pin	Plug pin	Maximum resistance ohms (Ω)
A	A	0.085
B	B	
C	C	Continuity
D	D	
E	E	
F	F	
G	G	
H	H	0.085
I	I	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

TABLE IV. Pin to pin resistance (Class I) - Continued.

Receptacle pin	Plug pin	Maximum resistance ohms (Ω)
J K L M	J K L M	
O	O	Continuity
P R T	P R T	0.0063
U V	U V	0.085
W X	W X	0.0031

3.4.2.3.4 Connections. Connections for the slip ring grounds and the brush end shall be in accordance with the applicable drawing (see 3.3.1.1.1, 3.3.1.1.2, and 4.7.3.7.4).

3.4.2.3.5 Electromagnetic coupling.

3.4.2.3.5.1 Class I. The current induced in a loop consisting of control rings 16 and 17, in series, with a specified load, by a supply current flowing in a loop consisting of power rings 1 and 2 in series with a specified load, shall be attenuated by not less than 70 decibels when supply currents are not less than 1 A, peak, and in the signal frequency range of 400 to 3000 Hz. Power rings 1 and 2 shall be loaded with a resistive load of not greater than 0.2 Ω. Control rings 16 and 17 shall be loaded with a resistive load of 150 Ω on the brush side, and 660 Ω on the ring side (see 4.7.3.7.5.1).

3.4.2.3.5.2 Class II. The current induced in a loop consisting of control rings 11 and 12, in series, by a supply current flowing in a loop consisting of power rings 37 and 38, in series, shall be attenuated by not less than 70 decibels when supply currents are not less than 1 A, peak, and in the signal frequency range of 400 to 3000 Hz (see 4.7.3.7.5.2).

3.4.3 Environmental conditions. The slip ring assembly shall operate as specified in the environmental conditions specified herein (see 4.7.3.8).

3.4.3.1 Water spray (nonoperating). The slip ring assembly enclosure shall prevent leakage of water into the rotor and brush assemblies when exposed to a spray of fresh water at 35 pounds per square inch gage (psig) (241 kilopascals (kPa)) with a flow of at least 10 gallons per minute (gal/min) when directed from any angle toward the slip ring assembly from a distance of 3.0 ± 0.5 feet (ft) for a duration of not less than 3 min (see 4.7.3.8.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.4.3.2 Water immersion (nonoperating). The slip ring assembly shall prevent leakage of water into the rotor and brush assemblies when immersed in tap water to a depth of 6 to 7 inches (in.) above the top cover (see 4.7.3.8.2).

3.4.3.3 Atmospheric pressure (nonoperating). The slip ring assembly shall be capable of withstanding atmospheric pressure equivalent to an altitude of 40 000 ft maximum (see 4.7.3.8.3).

3.4.3.4 Sand and dust (nonoperating). The slip ring assembly shall be operational and shall not be damaged nor its performance degraded during or after exposure to windblown particles 0.000004 to 0.04 in. in diameter from any angle with wind speeds intermittent and variable up to 35 knots (see 4.7.3.8.4).

TABLE V. Pin to pin resistance (Class II).

Connector 1			Connector 2		
Receptacle pin (J1)	Plug pin (P1)	Maximum resistance (Ω)	Receptacle pin (J2)	Plug pin (P2)	Maximum resistance (Ω)
A	A	0.0043	A	A	
D	D		B	B	
			C	C	
B	B		D	D	
C	C	0.021	E	E	
E	E		F	F	
F	F		H	H	
			J	J	
			K	K	
			L	L	
			M	M	0.121
			P	P	
			R	R	
			S	S	
			T	T	
			U	U	
			V	V	
			W	W	
			X	X	
			Y	Y	
			Z	Z	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

TABLE V. Pin to pin resistance (Class II) - Continued.

Connector 1			Connector 2		
Receptacle pin (J1)	Plug pin (P1)	Maximum resistance (Ω)	Receptacle pin (J2)	Plug pin (P2)	Maximum resistance (Ω)
			a	a	
			b	b	
			c	c	
			e	e	
			f	f	
			g	g	
			h	h	
			G	G	
			N	N	
			W	W	Continuity
			d	d	
			j	j	

3.4.3.5 Fungus (nonoperating). Slip ring assembly materials shall be fungus non-nutrients (see 4.7.3.8.5).

3.4.3.6 Shock (nonoperating). The slip ring assembly shall be capable of withstanding induced shocks of half-sine wave applied along three mutually perpendicular directions with a peak valve of not more than 25 gravity units (g) for 11 ms without failure or degradation of operation (see 4.7.3.8.6).

3.4.3.7 Vibration (nonoperating). The slip ring assembly shall be capable of withstanding simple harmonic motions applied along three mutually perpendicular directions for 3 hours along each axis when tested in accordance with 4.7.3.8.7.

3.4.3.8 High temperature. The slip ring assembly shall meet performance requirements when exposed to an operating temperature of 140°F and a nonoperating temperature of 160°F in accordance with 4.7.3.8.8.

3.4.3.9 Low temperature. The slip ring assembly shall meet performance requirements when exposed to an operating temperature of -25°F and a nonoperating temperature of -65°F in accordance with 4.7.3.8.9.

3.5 Finish.

3.5.1 Class I. The slip ring shall be painted with semi-gloss enamel. The final top coat color shall be light green, color number 24533 of FED-STD-595 (see 4.7.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

3.5.2 Class II. The slip ring shall be painted with an epoxy-polyamide chemical agent resistant coating conforming to MIL-C-22750, type I. All aluminum surfaces shall be suitably cleaned, treated and primed with a corrosion inhibiting, lead and chromate free, primer (see 4.7.2).

3.6 Identification and marking. Identification and marking shall be permanent and legible and shall include as a minimum, the manufacturer's identification code (CAGE), the contract or order number, the National Stock Number (NSN) and the Part or Identifying Number (PIN) (see 4.7.2).

3.7 Workmanship. Workmanship shall be of a quality to assure that the slip ring assembly and its components are free of defects that compromise, limit, or reduce capability in the performance of its intended use. There shall be no loose, damaged, or missing assemblies, components, or attaching hardware. All moving parts shall operate without sticking, binding, or interference. Bolt heads shall not extend above the mounting face. Exposed surfaces shall not have dirt or grease buildup; chipped, scratched, or peeling paint; rust; corrosion; or incorrect finish. Precautions shall be observed throughout manufacture and assembly to ensure a product free of burrs, chips, sharp edges, process residue, or other foreign material that would adversely affect appearance or operation. There shall be no evidence of burned, broken, frayed, or corroded electrical connectors. Particular attention shall be paid to marking of parts, plating, machine-screw assemblage, welding, and soldering (see 4.7.2).

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.1.1 Inspection conditions. Unless otherwise specified (see 6.2), all inspection shall be conducted under the following conditions:

a. Air temperature: 73 ± 18°F (23 ± 10°C).
b. Barometric pressure: 28.5 (+2, -3) in. Mercury (Hg) (725 (+50, -75) mm)
c. Relative humidity: 50 ± 30%.

4.2 First article inspection. Unless otherwise specified (see 6.2), first article inspection shall be performed on preproduction or initial production samples as specified when a first article sample is required (see 3.1). This inspection shall include the examinations of 4.4 and the tests of 4.5 and 4.6.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the current version before use.

4.2.1 Preproduction inspection. When specified (see 6.2), the preproduction sample shall consist of two slip ring assemblies. Preproduction inspection shall consist of inspection as specified in table VI.

4.2.2 Initial production inspection. Unless otherwise specified (see 6.2), the Government shall select two slip ring assemblies from the first ten units produced under the production contract for initial production inspection. Initial production units shall be inspected as specified in table VI.

TABLE VI. Classification of inspections.

Title	Requirement	Inspection	First article	Conformance	
				Examination (see table VII)	Acceptance (100%)
Materials and construction	3.2 thru 3.3.2.5, 3.3.1.1, 3.3.1.2, 3.3.2.1 thru 3.3.2.4	4.7.1	X		X
Defects	3.3.1.1, 3.5, 3.6 and 3.7	4.7.2	X	X	
Starting torque	3.4.1.1	4.7.3.1	X		X
Operation	3.4.1.2	4.7.3.2	X		X
Normal speed	3.4.1.3	4.7.3.2	X		
Maximum speed	3.4.1.4	4.7.3.3	X		X
Stopping	3.4.1.5	4.7.3.2	X		
Static limit load capacity	3.4.1.6	4.7.3.4	X		
Transient voltage	3.4.2.1.1	4.7.3.5.1	X		
Current	3.4.2.1.2	4.7.3.2, 4.7.3.5.2	X		
Transient voltage	3.4.2.2.1	4.7.3.6.1	X		
Current	3.4.2.2.2	4.7.3.2, 4.7.3.6.2	X		
Capacitance	3.4.2.2.3	4.7.3.6.3	X		
Noise	3.4.2.2.4	4.7.3.6.4	X		X
Dielectric withstanding voltage	3.4.2.3.1	4.7.3.7.1	X		X
Insulation resistance	3.4.2.3.2	4.7.3.7.2	X		X
Resistance	3.4.2.3.3	4.7.3.7.3	X		X
Connections	3.4.2.3.4	4.7.3.7.4	X		
Electromagnetic coupling	3.4.2.3.5	4.7.3.7.5	X		

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the current version before use.

TABLE VI. Classification of inspections - Continued.

Title	Requirement	Inspection	First article	Conformance	
				Examination (see table VII)	Acceptance (100%)
Water spray	3.4.3.1	4.7.3.8.1	X		
Water immersion	3.4.3.2	4.7.3.8.2	X		X
Atmospheric pressure	3.4.3.3	4.7.3.8.3	X		
Sand and dust	3.4.3.4	4.7.3.8.4	X		
Fungus	3.4.3.5	4.7.3.8.5	X		
Shock	3.4.3.6	4.7.3.8.6	X		
Vibration	3.4.3.7	4.7.3.8.7	X		
High temperature	3.4.3.8	4.7.3.8.8	X		
Low temperature	3.4.3.9	4.7.3.8.9	X		

4.3 Conformance inspection. Conformance inspection shall include the examinations of 4.4 and the tests of 4.7.3 (see table VI).

4.4 Examination.

4.4.1 Sampling. Samples from an inspection lot for conformance inspection shall be selected in accordance with ANSI/ASQC Z1.4. This element of inspection shall encompass all visual examinations and dimensional measurements of requirements of section 3 as listed in table VII. Noncompliance with any specified requirement or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

TABLE VII. Classification of defects.

Category	Defect	Method of examination
Critical	None	
Major:		
101	Assembly, incomplete (see 3.3.1.1).	Visual
102	Dimensions affecting interchangeability, out of tolerance (see 3.3.1.1).	SIE 1/
103	Protective finish, improper (see 3.5).	Visual
104	Bolt heads extending above mounting face (see 3.7).	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects - Continued.

Category	Defect	Method of examination
Minor:		
201	Dimensions not affecting interchangeability, out of tolerance (see 3.3.1.1).	SIE
202	Identification marking, improper (see 3.6).	Visual
203	Workmanship, improper (see 3.7).	Visual

1/ SIE = Standard Inspection Equipment.

4.5 Acceptance tests (100%). Each slip ring assembly shall be subjected to the tests specified in table VI.

4.6 Failure. Failure of any slip ring assembly to pass any of the specified tests shall be cause for the Government to refuse acceptance of the production quantity represented, until action taken by the contractor to correct defects and prevent recurrence has been approved by the Government.

4.7 Methods of inspection.

4.7.1 Materials and design. Conformance to 3.2 thru 3.2.5, 3.3.1.1, 3.3.1.2, 3.3.2.1 thru 3.3.2.4, shall be determined by inspection of contractor records providing proof or certification that materials conform to requirements. Applicable records shall include drawings, specifications, design data, receiving inspection records, processing and quality control standards, vendor catalogs and certifications, industry standards, test reports, and rating data.

4.7.2 Defects. Conformance to 3.3.1.1, 3.5, 3.6, and 3.7 shall be determined by examination for the defects listed in table VII. Examination shall be visual, tactile, or by measurement with standard inspection equipment.

4.7.3 Performance. The slip ring assembly shall meet the physical conditions specified herein. All tests described herein shall be conducted in a suitable test fixture. The slip ring assembly shall be mounted with the mounting base horizontal as in figure 1.

4.7.3.1 Starting torque. To determine conformance to 3.4.1.1, a tangential force shall be applied to the slip ring flange at a known distance from the center of rotation with the slip ring assembly mounted as in figure 1 supported by the mounting base. The distance to the center of rotation and the applied force required to initiate motion of the rotor assembly shall be measured. The starting torque shall not exceed 62.5 lbf-in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

4.7.3.2 Operating performance.

4.7.3.2.1 Class I. To determine conformance to 3.4.1.2, 3.4.1.3, 3.4.1.5, 3.4.2.1.2.1, and 3.4.2.2.2.1, an operational performance test shall be performed as specified. An operational cycle shall consist of rotation at 7.5 rpm for 8 revolutions. The direction of rotation shall be reversed after each cycle. The rotation of the slip ring assembly shall be stopped in not greater than 0.25 ± 0.05 s when changing the direction of rotation. During any 3 of the 8 revolutions in each cycle, a current of 160 ± 16 A shall be passed through rings 1 and 2, connected in series, with a duty cycle of 10 ± 1 s on and 30 ± 1 s off. A current of at least 2.5 A shall be passed through rings 3 through 17 connected in series for not less than 3 revolutions in each cycle. Each current shall be recorded and inspected for loss if continuity. The slip ring assembly shall satisfactorily pass this test within the parameters specified without failure, degradation of performance or damage to the unit.

4.7.3.2.2 Class II. To determine conformance to 3.4.1.2, 3.4.1.3, 3.4.1.5, 3.4.2.1.2.2, and 3.4.2.2.2.2 an operational performance test shall be performed. An operational cycle shall consist of rotation at 7.5 rpm for 8 revolutions. The direction of rotation shall be reversed after each cycle. The rotation of the slip ring assembly shall be stopped in not greater than 0.25 ±0.05 s when changing the direction of rotation. During any 3 of the 8 revolutions in each cycle, a current of 160 ± 16 A shall be passed through rings 37 and 38, connected in series with a duty cycle of 10 ± 1 s on and 30 ± 1 s off. A current of 30 ± 5 A shall be passed through rings 33 through 36 connected in series for not less than 3 revolutions in each cycle. A current of at least 2.5 A shall be passed through rings 1 through 6, 8 through 12, 14 through 19, 21 through 26, and 28 through 31, connected in series for not less than 3 revolutions in each cycle. A 1 mHz TTL square-wave signal, with a maximum current of 0.25 A, shall be passed through rings 14 through 19, 21 through 26, and 28 through 31 for not less than 3 revolutions in each cycle. A 100 kHz TTL square-wave signal, with a maximum current of 0.25 A, shall be passed through rings 1 through 6 and 8 through 12 for not less than 3 revolutions in each cycle. Each current shall be recorded and inspected for loss of continuity. The slip ring assembly shall satisfactorily pass this test within the parameters specified without failure, degradation of performance or damage to the unit.

4.7.3.3 Maximum speed. To determine conformance to 3.4.1.4, the slip ring assembly shall complete an operational performance test as specified in 4.7.3.2, except the operational cycle shall consist of rotation at 12 rpm for 8 revolutions and then reversed rotation at 12 rpm for 8 revolutions.

4.7.3.4 Static limit load capacity. To determine conformance to 3.4.1.6, the slip ring assembly, mounted in a suitable mounting fixture, shall be subjected to the specified transmitted load combinations. There shall be no degradation of electrical performance or structural deformation. Following this test, the slip ring assembly shall be subjected to, and shall pass, an acceptance test in accordance with table VI.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:38Z
Check the source to verify that this is the current version before use.

4.7.3.5 Power rings.

4.7.3.5.1 Transient voltage. To determine conformance to 3.4.2.1.1, the slip ring assembly shall be rotated at between 7.5 and 12 rpm while the specified rings (see 3.3.1.2.3.1.1 and 3.3.1.2.3.1.2) transmit dc power. There shall be no loss of continuity or degradation of performance.

4.7.3.5.2 Current.

4.7.3.5.2.1 Class I. To determine conformance to 3.4.2.1.2.1 and 3.4.2.2.2.1, the slip ring assembly shall be rotated at between 7.5 and 12 rpm for 8 revolutions and then reversed for 8 revolutions while carrying a current of 190 A maximum with surges of 500 A for 20 ms. There shall be no loss of continuity or degradation or performance.

4.7.3.5.2.2 Class II. To determine conformance to 3.4.2.1.2.2, and 3.4.2.2.2.2 the slip ring assembly shall be rotated at between 7.5 and 12 rpm for 8 revolutions and then reversed for 8 revolutions while carrying a current of 190 A maximum with surges of 500 A for 20 ms on rings 37 and 38; and a current of 50 A with surges of 70 A up to 20 ms through rings 33 through 36. There shall be no loss of continuity or degradation of performance.

4.7.3.6 Control rings.

4.7.3.6.1 Transient voltage. To determine conformance to 3.4.2.2.1, the slip ring assembly shall be rotated at between 7.5 and 12 rpm while the specified rings (see 3.3.1.2.3.2.1 and 3.3.1.2.3.2.2) transmit dc power. There shall be no loss of continuity or degradation of performance.

4.7.3.6.2 Duty cycle. To determine conformance to 3.4.2.2.2, the slip ring assembly shall be rotated at 12 rpm for 8 revolutions and then reversed for 8 revolutions while carrying current as specified below. There shall be no loss of continuity or degradation of performance.

a.	Continuous:	7A	
b.	Transient:	10 A	1.5 to 40 s
		50 A	0.15 to 3.0 s
		100 A	0.035 to 0.8 s

4.7.3.6.3 Capacitance. To determine conformance to 3.4.2.2.3, the capacitance of each control circuit shall be measures between each conductor and its shield with the shield and slip ring housing connected to ground. Capacitance shall not exceed 600 pF. Test frequency shall be between 10 and 200 kHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

4.7.3.6.4 Noise. To determine conformance to 3.4.2.2.4, all pins of the connector on the brush side shall be shorted together and the noise voltage measured across any two connector pins. A 5 mA current shall be passed through the rings being measured while the slip ring assembly is rotated at 8 rpm. The noise voltage shall be observed on an oscilloscope and the peak level shall not exceed 400 uV.

4.7.3.7 Power and control rings.

4.7.3.7.1 Dielectric withstanding voltage. To determine conformance to 3.4.2.3.1, a test potential of 500 V rms, 60 Hz, shall be applied initially for a period of 15 s between all circuits and the case, and from each circuit to all others. (All subsequent testing of dielectric withstanding voltage shall be conducted at 400 V rms, 60 Hz.) There shall be no damage or performance degradation as a result of this test.

4.7.3.7.2 Insulation resistance test. To determine conformance to 3.4.2.3.2, an insulation resistance test shall be made between each circuit and between each circuit and the case. A test voltage of at least 100 V dc shall be applied and the insulation resistance measured. Insulation resistance shall be not less than 100 MΩ, at 100 V dc at 50 to 60% relative humidity, between mutually insulated points.

4.7.3.7.3 Resistance. To determine conformance to 3.4.2.3.3, the resistance of each ring shall be measured from pin to pin of the input and output connectors while the slip ring assembly is rotated at a speed of 8 to 10 rpm. In the event that equipment is not available for measuring the dynamic resistance of each circuit, resistance may be measured statically. Resistance measurements shall be made at intervals of 30° if statically measured. The measured resistance shall be as specified in the applicable table (see 3.4.2.3.3.1 and 3.4.2.3.3.2).

4.7.3.7.4 Connections. To determine conformance to 3.4.2.3.4, a visual inspection of the slip ring assembly shall be performed. The connections shall be in accordance with the applicable drawing (see 3.3.1.1.1 and 3.3.1.1.2).

4.7.3.7.5 Electromagnetic coupling.

4.7.3.7.5.1 Class I. To determine conformance to 3.4.2.3.5.1, rings 1 and 2 shall be connected with a resistive load of at least 0.2 Ω. Rings 16 and 17 shall be loaded with a resistive load of 150 Ω on the brush side and 660 Ω on the ring side. A peak current of at least 1 A, in the frequency range of 400 to 3000 Hz shall be applied to rings 1 and 2 with the specified load resistance. The current induced in the loop consisting of rings 16 and 17, with the specified load resistances, shall be measured. Attenuation shall be not less than 70 decibels.

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the current version before use.

4.7.3.7.5.2 Class II. To determine conformance to 3.4.2.3.5.2, rings 11 and 12 shall be loaded with a resistive load of 150 Ω on the brush side and 660 Ω on the ring side. Rings 37 and 38 shall be loaded with a resistive load of not greater than 0.2 Ω. The current induced in a loop consisting of rings 37 and 38, shall be attenuated by not less than 70 decibels when supply currents are not less than 1 A, peak, in the frequency range of 400 to 3000 Hz.

4.7.3.8 Environmental. To determine conformance to 3.4.3, an operational performance test shall be conducted when specified. Nonoperating environments do not require rotation or current flow through the slip ring assemblies. At the conclusion of each environmental test, the slip ring assembly shall be subjected to the acceptance tests listed in table VI. The unit shall not be damaged nor its performance degraded after environmental testing.

4.7.3.8.1 Water spray (nonoperating). To determine conformance to 3.4.3.1, this test shall be performed in accordance with the splash proof test of MIL-STD-108, except that the water shall be at 35 psig (241 kPa) with a flow of at least 10 gal/min. The spray shall be directed from any angle to the slip ring assembly, from a distance of 3.0 ± 0.5 ft (0.91 ± 0.15 m) for a duration of not less than 3 min. Any moisture entering the electrical enclosure shall be cause for rejection. A slight wetting of the mechanical surfaces between the splash seal and the electrical enclosure seal shall be permitted.

4.7.3.8.2 Water immersion (nonoperating). To determine conformance to 3.4.3.2, the electrical connectors on the slip ring assembly shall be capped with sealed mating connectors. The slip ring assembly shall be immersed in tap water to a depth of 6 to 7 in. above the top cover for not less than 5 min while bubbles which result from entrapped air on various external parts of the slip ring assembly and cable are noted and cleared where practical. While the slip ring assembly is still immersed, an internal pressure of 1 ± 0.5 psig (7 ± 3.5 kPa) shall be applied and held for a period of at least 1 min while the slip ring assembly is examined for the appearance of new bubbles. There shall be no bubbles emitted from the slip ring assembly as a result of pressurization. At the completion of the test, the slip ring assembly shall be removed from the water and the pressure port and mating connector removed. The pressure port shall then be sealed with a self-sealing screw.

4.7.3.8.2.1 Alternate water immersion (nonoperating). If the appropriate equipment necessary for 4.7.3.8.2 is not available, the following test shall be performed. The slip ring assembly shall be placed in a pressure chamber. A tube shall be connected to the slip ring assembly pressure port and routed outside the chamber to a container of water at atmospheric pressure. The end of the tube shall be covered by not more than 1 in. of water. The chamber shall be pressurized to 0.6 ± 0.1 psig (4.1 ± 0.7 kPa) and held for at least 3 min. The immersed end of the tube shall be observed for bubbles evidencing air leakage. Entrapped air in or on the tubing shall be distinguished from air leakage. There shall be no evidence of air leakage from the slip ring assembly.

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:38Z
Check the source to verify that this is the currentversion before use.

4.7.3.8.3 Atmospheric pressure (nonoperating). To determine conformance to 3.4.3.3, the slip ring assembly shall be tested in accordance with MIL-STD-810, method 500.2, procedure I. The test pressure shall be that equivalent to an altitude of 40 000 ft.

4.7.3.8.4 Sand and dust (nonoperating). To determine conformance to 3.4.3.4, the slip ring assembly shall be tested in accordance with MIL-STD-810, method 510.3, procedure I except that the temperature during test step 5 shall be limited to 140°F. After completion of this test, the slip ring assembly shall meet 4.7.3.2.

4.7.3.8.5 Fungus (nonoperating). To determine conformance to 3.4.3.5, the slip ring assembly shall be tested in accordance with MIL-STD-810, method 508.4. In the event that the manufacturer certifies only non-nutrients have been used, the fungus test may be omitted.

4.7.3.8.6 Shock (nonoperating). To determine conformance to 3.4.3.6, the slip ring assembly shall be tested in accordance with the requirements of MIL-STD-202, method 213B, condition J, except that 25 g for 11 ms shall apply. After completion of this test, the slip ring assembly shall meet 4.7.3.2.

4.7.3.8.7 Vibration (nonoperating). To determine conformance to 3.4.3.7, the slip ring assembly shall be tested in accordance with the requirements of MIL-STD-810, method 514.4, category 8, procedure I, with the test level as specified in figure 2. The sweep time shall be 15 min from 5 to 500 to 5 Hz. A sinusoidal cycling time of 30 min per 1000 miles or a maximum 3 hours per axis is required.

4.7.3.8.8 High temperature. To determine conformance to 3.4.3.8, the slip ring assembly shall complete 25 cycles as specified in 4.7.3.2 during high temperature testing in accordance with MIL-STD-810, method 501.3, procedures I and II, except as follows:

a. Operating temperature: 140°F.
b. Nonoperating temperature: 160°F.

4.7.3.8.9 Low temperature. To determine conformance to 3.4.3.9, the slip ring assembly shall complete 25 cycles as specified in 4.7.3.2 during low temperature testing in accordance with MIL-STD-810, method 502.3, procedures I an II, except as follows:

a. Operating temperature: -25°F.
b. Nonoperating temperature: -65°F.

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When actual packaging of materiel is to be performed

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the currentversion before use.

by DoD personnel, these personnel need to contact the responsible packaging activity to ascertain requisite packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activity within the Military Department or Defense Agency, or within the Military Department's System Command. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature which may be helpful, but is not mandatory.)

6.1 Intended use.

6.1.1 Item definition. The slip ring assemblies covered by this specification are intended for use with a nominal 28 V dc, power, signal, and control network supplied from the vehicle engine driven electrical system and an audio intercommunication circuit. The slip ring assemblies will provide electrical connection between circuits of a revolving turret and a fixed structure on a ground based military vehicles.

6.1.2 Class I. This slip ring assembly is intended for, but not limited to, use on the M901 Improved TOW Vehicle (ITV).


6.1.3 Class II. This slip ring assembly is intended for, but not limited to, use on the M981 Fire Support Team Vehicle (FISTV).

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class and drawing title, number and date (see 1.2 and 3.3.1.1).
c. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.2.1 and 2.3).
d. If first article samples are not required (see 3.1).
e. Casting material, type, and quality, if used (see 3.2.1.1).
f. PIN and quantity of ring assemblies required (see 3.6 and 6.3).
g. If inspection conditions should be other than specified (see 4.1.1).
h. If preproduction inspection is required (see 4.2.1).
i. If initial production inspection is not required (see 4.2.2).
j. Packaging requirements (see 5.1).

Source: https://assist.dla.mil -- Downloaded: 202640-23T01:38Z
Check the source to verify that this is the currentversion before use.

ACCELERATION LEVELS: ± 9 (PEAK)

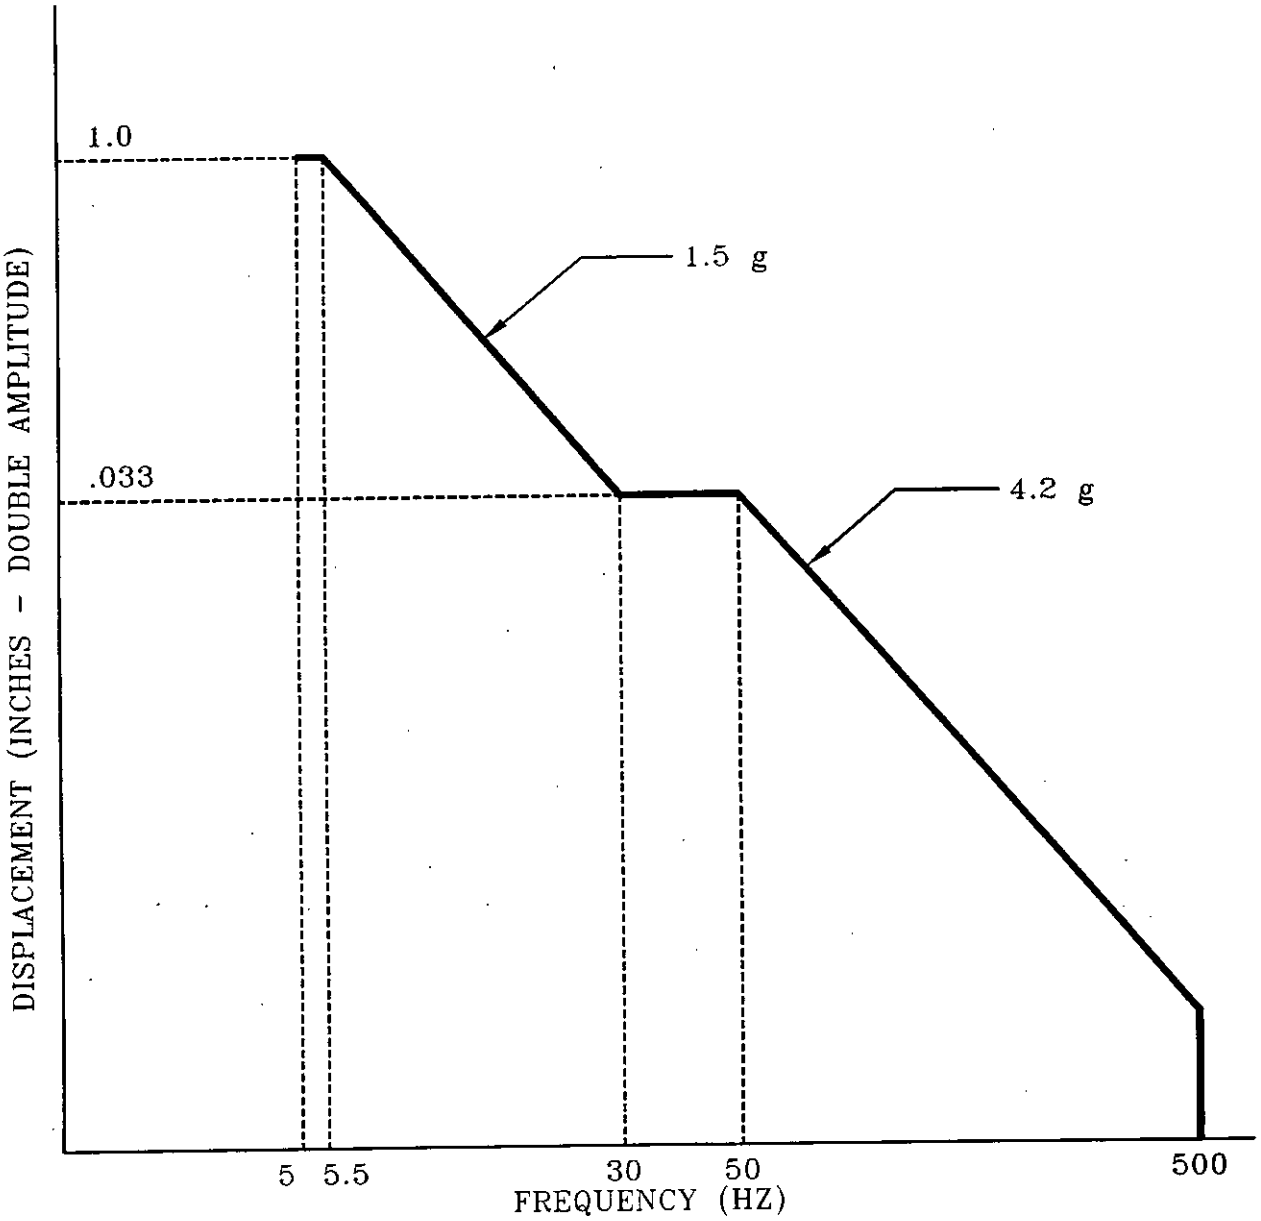


NOTE: All curves will be extended to 2 Hz. when test item resonances below 5 Hz, are expected.

FIGURE 2. Vibration test curve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.

6.3 Part or identifying number (PIN). The PIN to be used for ring assemblies acquired to this specification are created as follows:

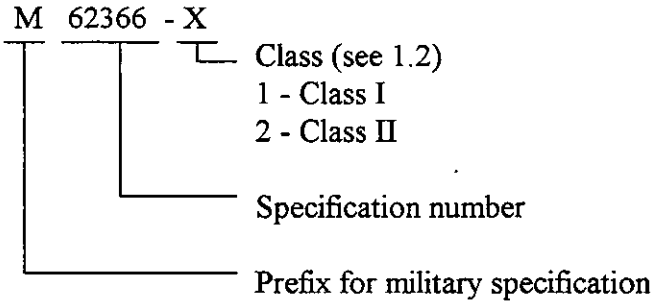

6.4 Subject term (key word) listing.

Brush block
FISTV
ITV
M901
M981
Rotor

6.5 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - AT

Preparing Activity:
Army - AT

(Project 2590-0246)

Source: https://assist.dla.mil -- Downloaded: 202610-23T01:38Z
Check the source to verify that this is the currentversion before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-PRF-62366B(AT)	2. DOCUMENT DATE (YYMMDD) 961202

3. DOCUMENT TITLE

Ring Assemblies, Electrical Contact

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial: (810) 574-8745 (2) AUTOVON: 786-8745
c. ADDRESS (Include Zip Code) Commander U.S. Army Tank-automotive and Armaments Command ATTN: AMSTA-TR-E/BLUE Warren, MI 48397-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:38Z
Check the source to verify that this is the current version before use.