MILITARY SPECIFICATION

FUZE, PD, M525, M526 AND M527B1, LESS HEAD ASSEMBLY METAL PARTS FOR

1. SCOPE

1.1 This specification covers the metal parts for three types of fuzes designated as Fuze, Point Detonating, M525, Fuze Point Detonating, M526, and Fuze, Point Detonating, M527B1 used for 60MM and 81MM Mortar ammunition.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the entent specified herein.

SPECIFICATIONS

FEDERAL

UU-T-106 -Tape, Pressure Sensitive Adhesive, Masking Paper
PPP-T-45 -(Type III, Grade B) -Tape, Gummed, Paper Reinforced and Plain, For Sealing and Securing.
PPP-F-320 -Fiberboard, Sheet, Stock and Cut Shapes
PPP-B-636 -Box, Fiberboard
PPP-B-676 -Boxes, Set-Up, Paperboard
PPP-C-843 -Cushioning, Mat'l, Celluose
QQ-P-416 -Plating, Cadmium Electrodeposited
QQ-Z-325 -Zinc, Coating Electrodeposited Requirements For

MILITARY

MIL-A-2550 -Ammunition and Special Weapons, General Specification For
MIL-F-26862-Fiberboard Solid, Dunnage Multipurpose Cushioning and Blocking Applications
MIL-I-45607-Inspection Equipment, Supply and Maintenance Of
MIL-F-22191-Films, Transparent, Flexible, Heat Sealed For packaging applications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105)
MIL-STD-109 - Quality Assurance Terms and Definitions
MIL-STD-1168 - Lot Numbering of Ammunition
MIL-STD-1169 - Packaging, Packing and Marking For Shipment of Inert Ammunition Components
MIL-STD-1235 - Single and Multilevel Continuous Sampling Procedures and Tables for Inspection by Attributes

DRAWINGS

ORDNANCE CORPS

8798658 - Cup, Booster
8798660 - Plug, Slider
8798661 - Spring, Slider
8798662 - Body, Assembly
8798675 - Cup, Booster Lead
8798677 - Slider
8800256 - Adapter
8800257 - Cup, Booster
8800463 - Holder, Booster
8800467 - Cup, Booster

PUBLICATIONS

ORDNANCE CORPS

IEL-8802176 - Index of Inspection Equipment Lists for Fuze, Point Detonating M525
ET-9201391 - Index of Inspection Equipment Lists for Fuze, Point Detonating M526
IEL-9200698 - Index of Inspection Equipment Lists for Fuze, Point Detonating M527B1

3. REQUIREMENTS

3.1 Material.-Materials and parts shall be in accordance with applicable drawings and specifications.

3.2 Metal parts.-The metal parts shall comply with all the requirements specified on the following drawings and with all requirements specified in applicable specifications.

Cup, Booster - 8798658
Plug, Slider - 8798660
Spring, Slider - 8798661
Body Assembly - 8798662
Cup, Booster Lead - 8798675

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

Slider -8798677
Adapter -8800256
Cup, Booster-8800257
Holder, Booster-8800463
Cup, Booster-8800467

3.3 Embrittlement of safety pin spring, slider spring, and setback spring.-The springs shall not break when tested as specified in 4.4.1.

3.4 Porosity (applicable to die cast and permanent mold casting only).

3.4.1 Surface.-The surface shall be defined as any area visible prior to sectioning, including cavities and threads. No pore shall exceed 1/32 inch in diameter, length, or depth. There shall be no more than eight pores of size 1/64 to 1/32 inch. This inspection shall be performend on the body after the completion of all machining operations.

3.4.2 Sectional surfaces

3.4.2.1 Vertical.-There shall be a minimum of 3/16 inch accumulated metal from the point of reference (see 6.6) to every point on the near edge of the lead cup cavity by any path and there shall be a minimum of 1/4 inch accumulated metal from the point of reference to every point on the near edge of the booster cup cavity by any path, when sectioned as specified in 4.4.2.

3.4.2.2 Horizontal.-There shall be no pore greater in diameter than .010 inch within 1/32 inch from the extremities of the lead cup cavity, slider guide pin cavity, or setback pin cavity, when sectioned as specified in 4.4.2.

3.5 Ballistic Arming.-The fuze body assembly shall not fail to arm when tested as specified in 4.3.3.4.

3.6 Workmanship.-All parts and assemblies shall be fabricated in a thorough, workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, rust, and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. Exterior surface coatings shall be uniform and continuous except for a few light scratches not exposing base material.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.-Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Reference shall be made to Standard MIL-STD-109 in order to define the terms used herein. The provisions of Specification MIL-A-2550 shall apply.

4.1.1 Submission of product.-At the time each completed lot of items deliverable under the contract is submitted to the Government for acceptance, the contractor shall supply the following information accompanied by a certificate which attests that the information provided is correct and applicable to the product being submitted:

a. A statement that the lot complies with all of the quality assurance provisions specified in this specification.

b. Drawing and specification number and date, together with identification and date of changes thereto.

c. A statement that all material purchased by the contractor meets requirements, when such material is controlled by Government or commercial specifications referenced in any of the contractual documents, and the certificates of conformance are on file and available for review.

d. Number of items in the lot.

e. Date submitted.

The certificate shall be signed by a responsible agent of the certifying organization. The initial certificate submitted shall be substantiated by evidence of the agent's authority to bind his principal. Substantiation of the agent's authority will not be required with subsequent certificates unless, during the course of the contract, this authority is vested in another agent of the certifying organization.

4.2 First Article Inspection

4.2.1 Submission.-Prior to the start of regular production, the contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with the provisions of 4.2.2. The first article sample shall consist of 105 complete assemblies and 25 complete set of parts (i.e. 25 each of every component and every subassembly) which have been produced by the contractor or furnished by a supplier and which have been manufactured using the same production processes, procedures and equipment which will be used in fulfilling the contract. Eighty complete assembies will be subjected to the Ballistic Arming Test as indicated in 4.2.2. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as will be used in regular production. Prior to submission, the contractor shall inspect the sample to the degree necessary to assure that it conforms to the requirements of the contract and submit a record of this inspection with the sample, including statements of findings for materials, processes

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

and tests. A sample containing known defects will not be submitted unless specifically authorized by the contracting officer. A first article sample, or portion thereof , as directed by the contracting officer, shall also be submitted whenever there is a lapse in production for a period in excess of 90 days or whenever a change occurs in manufacturing process, material used, drawing or specification such as to significantly affect product uniformity as determined by the Government.

4.2.2 Inspections to be performed.-Assemblies and components will be subjected by the Government to any or all of the examinations or tests specified in this specification and any or all requirements of the applicable drawings. In addition, for those components requiring a protective finish in accordance with drawing requirements, corrosion tests may be performed in order to determine acceptability of finishes applied.

4.2.3 Rejection.-If any assembly, subassembly or component part fails to comply with the requirements for the inspections performed in accordance with 4.2.2 the initial production quantity shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an assembly or component in the sample to comply with any or all of the stated requirements.- In the event of rejection, the Government reserves the right to require the contractor to take corrective action and submit a new initial production sample or portion thereof. Until an initial production sample is accepted, the contractor is in no way authorized by the Government to initiate regular produ tion unless otherwise directed by the contracting officer.

4.2.4 Ballistic test to be performed.-Eighty assemblies shall be subjected to the test specified in 4.4.4.

4.3 Inspections provisions

4.3.1 Lot formation.-The term "inspection lot" as used in this specification is defined as an essentially homogeneous collection of units of product from which a representative sample is drawn and inspected to determine conformance with applicable requirements. The sample selected shall represent only that quantity of units from which the sample was drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, in accordance with the same drawing, same drawing revision, same specification and same specification revision and complies with the provisions for submission of product as specified in MIL-STD-105. Changes to the process, specification, or drawing not affecting safety, performance, interchangeability, or storage, as determined by the Government, shall not be deemed to alter the homogeneity of an inspection lot. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein regardless of the type of sampling procedure which is being applied to determine conformance with requirements. Lot numbering, as required, shall be in accordance with MIL-STD-1168.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

4.3.2 Examination.-The examinations listed in the following subparagraphs shall be performed on inspection lots (see 4.3.1) of the components or assemblies designated in the applicable paragraph headings. Inspection for critical defects (and major defects, when so specified) shall be 100 percent. Sampling plans for major and minor defects shall be in accordance with MIL-STD-105 except that continuous sampling plans in accordance with MIL-STD-1235 may be used if approved by the Government. Instead of applying the AQL's designated herein to the groups of major and minor defects listed, the contractor may elect to apply AQL's to individual defects using an AQL of 0.40 percent for each major defect and an AQl of 0.65 percent for each minor defect. When this method is elected, it shall be applied to all of the major and minor defects listed in the applicable subparagraph of this section, except where 100 percent inspection is specified, and be documented as part of the contractor's inspection system. Equipment necessary for the performance of the inspection listed shall be in accordance with 4.3.4.

4.3.2.1 Body (see dwg. 8798664).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 1.5 percent	
101.	Diameter of slider cavity	Gage
102.	Depth of bottom of slider cavity from center line	Gage
103.	Location of slider cavity	Gage
104.	Location of guide pin hole	Gage
105.	Alignment of safety pin cavity with slider cavity	Gage
106.	Location of safety wire hole	Gage
107.	Location of set back pin hole	Gage
108.	Depth of setback pin counterbore, min	Gage
109.	Diameter of safety pin cavity.max	Gage
110.	Finish improper in slider or setback pin cavities	Visual
111.	Depth of booster cavity	Gage
112.	Diameter of lead cup hole, min	Gage
113.	Length under flange, max	Gage
114.	Depth of head cavity, min	Gage
Minor:	AQL 6.5 percent	
201.	Pitch diameter of setback plug thread, max	Gage
202.	Depth of slider cavity from bottom of counterbore	Gage
203.	Minor diameter of setback plug thread, max	Gage
204.	Pitch diameter of guide pin thread, max	Gage
205.	Minor diameter of guide pin thread, max	Gage
206.	Finish improper other than in slider and setback pin cavities	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

207. Pitch diameter of booster cup thread..Gage
208. Minor diameter of booster cup thread, max.....Gage
209. Pitch diameter of shell thread.....Gage
210. Major diameter of shell thread, max...Gage
211. Pitch diameter of head thread.....Gage
212. Minor diameter of head thread, max....Gage
213. Pitch diameter of slider plug thread..Gage
214. Minor diameter of slider plug thread, max.....Gage
215. Diameter of lead cup hole, max.....Gage
216. Diameter of slider cavity counterbore, min.....Gage
217. Diameter of firing pin hole, min.....Gage
218. Diameter of flange.....Gage
219. Length of slider plug thread, min.....Gage
220. Length of imperfect booster cavity thread, max.....Gage
221. Length of head cavity thread, min.....Gage
222. Length of shell thread undercut, max.....Gage
223. Total length.....Gage
224. Lead cup hole chamfer over max.....Visual
225. Surface defects (see 3.4.1).....Visual-Gage
226. Evidence of poor workmanship (see 3.6).....Visual

4.3.2.2 Slider (see dwg. 8798677)

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 1.5 percent	
101.	Detonator flash hole missing	Visual
102.	Diameter of detonator cavity	Gage
103.	Depth of detonator cavity	Gage
104.	Location of detonator cavity	Gage
105.	Length of guide pin slot, min	Gage
106.	Location of firing pin hole	Gage
107.	Total length, min	Gage
108.	Length to bottom of safety pin slot	Gage
109.	Width of safety pin slot	Gage
110.	Width of guide pin slot	Gage
111.	Alignment of guide pin slot, safety pin slot and outside diameter	Gage
112.	Outside diameter, max	Gage
113.	Finish improper	Visual
Minor:	AQL 2.50 percent	
201.	Outside diameter, min	Gage
202.	Length of cylindrical surface	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

203. Diameter of detonator flash hole max.....Gage
204. Location of flash hole.....Gage
205. Length to flat.....Gage
206. Diameter of firing pin hole, min.....Gage
207. Evidence of poor workmanship (see 3.6).....Visual

4.3.2.3 Plug, Slider (see dwg. 8798660)

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	None defined.	
Minor:	AQL 4.0 percent	
201.	Pitch diameter of thread, max.	Gage
202.	Length under head, max.	Gage
203.	Outside diameter, max.	Gage
204.	Major diameter of thread, min.	Gage
205.	Diameter of cavity, min.	Gage
206.	Depth of cavity.	Gage
207.	Screw driver slot missing or shallow to the extent of not being usable.	Visual
208.	Chamfer missing from mouth of cavity.	Visual
209.	Evidence of poor workmanship (see 3.6).	Visual

4.3.2.4 Spring Slider (see dwg. 8798661)

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL .40 percent	
101.	Load at assembled height, max.	Gage
102.	Load at test height, min.	Gage
Minor:	AQL 2.5 percent	
201.	Solid height, max.	Gage
202.	Outside diameter, max.	Gage
203.	Inside diameter, min.	Gage
204.	Ends not closed.	Visual
205.	Evidence of poor workmanship (see 3.6).	Visual

4.3.2.5 Pin Safety (see dwg. 8798667 covering a detail of dwg. 8798662).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 1.0 percent	
101.	Location of hole	Gage
102.	Diameter of body, max	Gage
103.	Chamfer missing from hole	Visual
104.	Diameter of hole, min	Gage
105.	Pin straightness	Gage
Minor:	AQL 1.5 percent	
201.	Diameter of body, min	Gage
202.	Finish improper	Visual
203.	Length of body, min	Gage
204.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.6 Spring,Safety Pin (see dwg. 8798669 covering a detail of dwg. 8798662).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
101.	Load at assembled height	Gage
102.	Load at test height, min	Gage
Minor:	AQL 1.5 percent	
201.	Inside diameter, min	Gage
202.	Reduced diameter of coil	Visual
203.	Evidence of poor workmanship (see 3.6)	Visual

4.3.7 Pin,setback (see dwg. 8798665 covering a detail of dwg. 8798662).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 0.65 percent	
101.	Diameter of small end, min	Gage
102.	Total length, max	Gage
103.	Length of small end, min	Gage
104.	Location of hole from shoulder, min	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

Minor: AQL 1.5 percent

201.	Outside diameter, min.	Gage
202.	Lengh of large diameter.	Gage
203.	Finish improper.	Visual
204.	Evidence of poor workmanship (see 3.6).	Visual

4.3.2.8 Spring setback pin (see dwg. 8798670 covering a detail of dwg. 8798662).

Categories	Defects	Method Of Inspection

Critical: None defined.

Major: AQL .40 percent

101.	Load at test height, max.	Gage
102.	Solid height, max.	Gage

Minor: AQL 1.50 percent

201.	Load at assembled height, min.	Gage
202.	Reduced diameter of coil.	Visual
203.	Outside diameter max.	Gage
204.	Evidence of poor workmanship (see 3.6).	Visual

4.3.2.9 Plug, setback (see dwg. 8798668 covering a detail of dwg. 8798662).

Categories	Defects	Method Of Inspection

Critical: None defined.

Major: None defined.

Minor: AQL 2.5 percent

201.	Pitch diameter of thread, min.	Gage
202.	Major diameter of thread, min.	Gage
203.	Height of spring pilot, max.	Gage
204.	Total length.	Gage
205.	Slot missing.	Visual
206.	Slot protrudes through more than one thread.	Visual
207.	Evidence of poor workmanship (see 3.6).	Visual

4.3.2.10 Pin, slider guide (see dwg. 8798666 covering a detail of dwg. 8798662).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL .40 percent	
101.	Diameter of guide	Gage
Minor:	AQL 4.0 percent	
201.	Pitch diameter of thread, min	Gage
202.	Major diameter of thread, min	Gage
203.	Total length, min	Gage
204.	Length of threaded shoulder, min	Gage
205.	Length from end to guide	Gage
206.	Finish improper	Visual
207.	Chamfer missing	Visual
208.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.11 Cup, booster (see dwg. 8800467).

Categories	Defects	Method Of Inspection
Major:	AQL .65 percent	
101.	Total length, max	Gage
102.	Thickness of bottom, min	Gage
103.	Outside diameter of cup, max	Gage
104.	Inside diameter of cavity	Gage
Minor:	AQL 2.5 percent	
201.	Thickness of bottom, max	Gage
202.	Outside diameter of flange (min)	Gage
203.	Total length, min	Gage
204.	Finish improper	Visual
205.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.12 Holder, booster (see dwg. 8800463).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL .65 percent	
101.	Diameter of booster cup hole	Gage
102.	Pitch diameter of thread (min.)	Gage
103.	Major diameter of thread (min.)	Gage
Minor:	AQL 2.5 percent	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

201.	Length of thread pilot	Gage
202.	Location of holes	Gage
203.	Depth of holes	Gage
204.	Width	Gage
205.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.13 Cup, Booster Lead (see dwg. 8798675).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 0.65 percent	
101.	Diameter under flange	Gage
102.	Length under flange, max	Gage
103.	Inside diameter	Gage
104.	Split, cut, or broken	Visual
Minor:	AQL 2.5 percent	
201.	Thickness of bottom	Gage
202.	Diameter of flange	Gage
203.	Length under flange, min	Gage
204.	Diameter of flash hole	Gage
205.	Concentricity of outside diameter with flash hole	Gage
206.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.14 Body assembly prior to inserting set-back plug (see dwg. 8798662).

Categories	Defects	Method Of Inspection
Critical:		
1.	Set-back pin spring missing	Visual
2.	Safety wire fails to engage set-back pin	Manual
Major:	None defined.	
Minor:	None defined.	

4.3.2.15 Body assembly (see dwg. 8798662).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method Of Inspection
Critical:		
1.	Safety pin missing	Visual
2.	Safety wire missing or insecure	Visua-Manual
Major:	AQL 0.65 percent	
101.	Alignment of slider cavity with safety pin and guide pin	Gage
102.	Safety pin bound or spring missing	Manual
103.	Guide pin missing	Visual
Minor:	AQL 1.5 percent	
201.	Guide pin above flush or improperly staked	Visual
202.	Set back plug above flush or improperly staked	Straight-Edge
203.	Any component or operation missing	Visual
204.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.16 Cup, Booster (see dwg. 8798658).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 0.65 percent	
101.	Outside diameter, max	Gage
102.	Inside height, min	Gage
103.	Outside diameter at cup lead, max	Gage
104.	Inside diameter of cavity	Gage
Minor:	AQL 2.5 percent	
201.	Pitch diameter of thread, max	Gage
202.	Major diameter of thread, min	Gage
203.	Length of lead, max	Gage
204.	Combined length of thread and lead, min	Gage
205.	Material thickness	Gage
206.	Evidence of poor workmanship (see 3.6)	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

4.3.2.17 Cup Booster (see dwg. 8800257).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 1.0 percent	
101.	Concentricity of outside diameter to threads	Gage
102.	Pitch diameter of threads, min	Gage
103.	Length of perfect threads	Gage
104.	Flatness of base	Gage
105.	Outside diameter, open end; max	Gage
106.	Minor diameter, max	Gage
107.	Inside diameter of cavity	Gage
Minor:	AQL 2.5 percent	
201.	Pitch diameter of threads, max	Gage
202.	Thickness of bottom	Gage
203.	Depth of cavity	Gage
204.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.18 Adapter (see dwg. 8800256).

Categories	Defects	Method O Inspection
Critical:	None defined.	
Major:	AQL 1.0 percent	
101.	Concentricity of female thread to shell thread	Gage
102.	Perpendicularity of shoulder to female thread	Gage
103.	Pitch diameter of female thread, min	Gage
104.	Minor diameter of female thread, max	Gage
105.	Pitch diameter of shell thread, max	Gage
106.	Pitch diameter of booster cup thread, max	Gage
107.	Length of booster cup perfect threads, min	Gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

108.	Length of female perfect threads, min.	Gage
109.	Length of shell thread from undercut to shoulder	Gage
Minor:	AQL 6.5 percent	
201.	Concentricity of booster cup thread to shell thread	Gage
202.	Pitch diameter of female thread, max.	Gage
203.	Pitch diameter of shell thread, min.	Gage
204.	Pitch diameter of booster cup thread, min	Gage
205.	Inside diameter	Gage
206.	Diameter of shoulder between shell and booster cup threads	Gage
207.	Diameter of shell thread undercut	Gage
208.	Distance across wrench slots, max	Gage
209.	Total length	Gage
210.	Finish improper	Visual-Tactile
211.	Shell thread undercut, max	Gage
212.	Width of wrench slot, min	Gage
213.	Shell thread undercut radius, max	Gage
214.	Evidence of poor workmanship (see 3.6)	Visual

4.3.2.19 Safety Wire (see dwg. 8798671 covering a detail of dwg. 8798622).

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 0.40 percent	
101.	Length of set-back engagement shaft, min	Gage
Minor:	AQL 2.5 percent	
201.	Diameter of wire, min	Gage
202.	Flat missing	Visual
203.	Taper missing	Visual
204.	Tab missing	Visual
205.	Evidency of poor workmanship (see 3.6)	Visual

4.3.2.20 Sealed Carton (as applicable, see section 5.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

Categories	Defects	Method Of Inspection
Critical:	None defined.	
Major:	AQL 0.65 percent	
101.	Contents loose	Manual
102.	Container punctured, crushed, or torn	Visual
103.	Tape improperly applied	Visual
Minor:	0.65 percent	
201.	Marking incorrect, incomplete or missing	Visual

4.3.3 Testing

4.3.3.1 Embrittlement of springs (see 3.3)-Major defect-A sample of 30 springs each shall be selected from each lot for testing. If one or more springs in any sample fail to comply with the applicable requirements, the lot shall be rejected. The test shall be performed as specified in 4.4.1.

4.3.3.2 Porosity of body (see 3.4.2)-Major defect.-A sample of 35 bodies shall be selected from each lot for this test. If one or more bodies fail to comply with the applicable requirements, the lot shall be rejected. The test shall be performed as specified in 4.4.2.

4.3.3.3 Salt spray tests-Major defect.-A sample of 4 components each shall be selected from each lot of Pin, Setback; Spring, Set Back Pin; Pin, Safety; Spring, Safety Pin; Spring Slider and tested in accordance with salt spray requirements cited on applicable drawings or as cited in Specifications QQ-P-416 or QQ-Z-325. If one or more components fail to comply with the applicable requirements, the lot shall be rejected. The test shall be performed as specified in 4.4.3.

4.3.3.4 Ballistic Arming (see 3.5).-Major defect-A sample of 80 body assemblies shall be selected from each lot for this test. If 2 or more assemblies fail to arm, the lot shall be rejected. Testing shall be performed as specified in 4.4.4.

4.3.4 Inspection Equipment.-Index of Inspection Equipment Numbers IEL-8802176, ET-9201391, and IEL-9200698 identify the inspection equipment required to perform the examinations and tests prescribed in this section. Those equipment lists coded F on the ET require the contractor to supply designs for inspection equipment per paragraph 6.2.

4.3.4.1 Government rights to documentation.-Inspection equipment drawings and lists provided and revised in accordance with the requirements of the IEL and ET may be used by DOD activities for design, procurement, manufacture, testing, evaluation,

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

production and receiving inspection, overhaul, shipping, storage, identification of stock, ordering and storage of replacement parts, inspection of items at overhaul, general maintenance of equipment, construction, survey and whenever inspection equipment drawings are needed.

4.3.4.2 Government use of contractor's inspection and test equipment.-The contractor shall make available to the Government all inspection and test equipment necessary for determining conformance with contract requirements. Personnel for operating the equipment, and verification of its accuracy, shall be supplied by the contractor for the performance of examination or test by the Government.

4.4 Test methods and procedures

4.4.1 Embrittlement of springs.-The springs shall be pulled by any suitable method until the minimum point of permanent distortion is reached to determine compliance with requirement as specified in 3.3.

4.4.2 Porosity

4.4.2.1 Vertical.-The fuze bodies shall be cut through the plane formed by the axis of the body and the axis of the slider cavity. After the reference point is established as shown on figure 1, the sections shall be inspected for compliance with the requirements as specified in 3.4.

4.4.2.2 Horizontal.-The same fuze bodies used in 4.4.2.1 shall be cut through a plane formed perpendicular to the axis of the body at a point midway between the bottom of the slider cavity and the shoulder of the body and shall be inspected for compliance with the requirements as specified in 3.4.

4.4.3 Salt spray test.-The salt spray test shall be accomplished in accordance with applicable procedures cited in Specification QQ-P-416, or QQ-Z-325. The test period shall be in accordance with requirements of the above referenced specifications or as cited on the applicable drawing, dependent upon the type of protective finish applied.

4.4.4 Ballistic Arming Test.-The sample body assemblies shall be assembled as a M525, PD, Fuze as shown on dwg. 8800197 with the following exceptions.

a. The fuzes shall be inert loaded.
b. The straight through head ass'y (as cited on dwg. 73-1-162) shall be used in lieu of the E7 Head Ass'y.
c. The booster cup may be excluded.
d. All staking and cementing operations may be omitted.
e. Slider shall be assembled with a dummy metal detonator capable of being imprinted by the firing pin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

The fuzes shall be assembled with head assemblies from accepted head assembly lots. When the body assembly is furnished less slider, slider spring and slider plug, the fuze shall be assembled with approved substitute components (see 6.6). The fuze shall then be assembled to a 60MM, M49A2E2 (inert loaded) cartridge assembled with an ignition cartridge only (charge zone zero) and fired horizontally for impact at a soft impact bunker located a minimum of 50 ft from the muzzle of the mortar. All samples shall be recovered and the fuzes examined to determine arming. The sample shall be considered armed if the safety pin has completely ejected from the body, the slider has moved into the armed position, and the dummy detonator has been imprinted by the firing pin.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.1.1 Body assembly, see dwg. 8798662.-Two hundred (200) Body assemblies shall be packed in 4 layers of 50 in a 10 x 5 arrangement within half-slotted corrugated fiberboard partitions in an RSC style corrugated fiberboard carton with a filler on the bottom, between layers, and on top. The outside dimensions of the partitions shall be 20 1/2 x 10 3/16 x 1 3/4 inches and the fillers shall be 20 1/2 x 10 3/6. The inside dimensions of the carton shall be 20 9/16 x 10 1/4 x 7 3/4.

5.1.1.2 Slider (dwg. 8798677). Five hundred (500) sliders shall be bulk packaged in a paperboard box, conforming to PPP-B-676, Type I, Variety 1, Class A or PPP-B-566, Style 1, Type B. The interior of the box shall be lined with a polyethylene bag conforming to PPP-B-26, for a Type I or II, Grade A bag. The bag shall be closed by folding the top opening at least 3-180° folds and securing the fold to the bag with a length of 1 inch wide PPP-T-76 tape. Cushioning material conforming to PPP-C-843, Type II, Class A shall be added as required for a tight package. Box size shall be approximately 4 1/2 by 4 1/2 by 6 1/2 inside dimensions. Bag size, after insertion into the box, shall be 4 3/4 by 4 3/4 by 15 inches. Boxes shall be closed by application of 1 inch wide tape, PPP-T-45, Type III, Grade B over the top and bottom center seams of the folding box and across the box bottom and onto the side panels for the set-up boxes.

5.1.1.2.1 Intermediate packaging. Twelve unit boxes (6000 sliders) shall be packaged in a fiberboard box. Box size shall be approximately 13 7/8 by 9 1/4 by 13 1/4 deep inside dimensions. Plain fiberboard pads shall be added to sides, ends of the box and on top of the contents as required for a tight package.

5.1.1.3 Spring, slider, see dwg. 8798661.-Ten thousand (10,000) springs shall be bulk-packed in a fiberboard box. A fiberboard filler equal in size to the length and width of the box less 1/16 inch shall be placed in the bottom of the box and one or more fillers on top of the contents as required for the tight pack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

5.1.1.4 Slider, plug, see dwg. 8798660.-Twenty-five hundred (2500) plugs shall be bulk-packed in fiberboard box. A fiberboard filler equal in size to the length and width of the box less 1/16 inch shall be placed on the bottom of the box and one or more fillers on top of the contents as required for a tight pack.

5.1.1.5 Cup, booster lead, (see dwg. 8798675).-Ten thousand (10,000) cups, booster lead shall be packed in bulk and an RSC style, corrugated fiberboard carton. The inside dimensions of the carton shall be 10 x 10 x 5 inches.

5.1.1.6 Holder, booster, 8800463.-One thousand (1,000) holders shall be placed on edge and packaged in a fiberboard box 20 holders per row; 10 rows per layer; and 5 layers per box. Each row of 20 holders shall be separated by a strip of commercial chipboard .060 inch thick. A plain fiberboard pad shall be placed on the bottom of the box; between each layer of holders and on the top layer of holders. Box size shall be approximately 11 7/8 by 5 5/8 by 6 3/8 inches deep. The chipboard strip shall be approximately 5 5/8 inches long by 1 1/8 inches wide. Plain pads shall be approximately 11 3/4 by 5 1/2 inches.

5.1.1.7 Cup booster, 8800467.-One thousand (1000) booster cups shall be bulk packaged in a paperboard box conforming to PPP-B-676, Type I, Grade A, Class A. Cushioning material conforming to PPP-C-843 shall be added as required to provide a tight package. Box size shall be approximately 4 3/4 by 4 3/4 by 2 3/4 inches deep. The cover shall be secured to the box by applying a length of tape UU-T-106 over the bottom of the box extending to the sides approximately 1 inch.

5.1.1.7.1 Intermediate package.-Twenty-seven boxes (27000 cups) shall be placed in a fiberboard box. Box size shall be approximately 14 7/8 by 8 5/8 by 14 7/8 inches deep. Filler pads shall be added to sides, ends, and top of box as required for a tight package.

5.1.1.8 Cup Booster, 8798658.-One thousand (1,000) booster cups shall be packaged in a fiber box conforming to PPP-B-636 Type CF, Class Domestic, Variety SW, Grade 200, Style RSC, with filler pads constructed of the same fiberboard material as the box. Cups shall be placed in the box in 10 layers 100 cups per layer-in a 10 by 10 arrangement. A filler pad equal in size to the inside length and width of the fiber box less 1/16 inch, shall be placed on the bottoms of the box; between each layer of cups; and on the top layer of cups. Additional filler pads shall be added to the top of the contents as required to provide a tight pack. Boxes shall be closed in accordance with instructions contained in the appendix of the box specification."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

5.1.1.9 Adapter, 8800256.-Fifty (50) adapters shall be packaged in a fiber box complete with half-slotted partitions assembled to form individual cells in a 5 by 5 -2 layers per box arrangement. A filler pad shall be inserted at the bottom of the box, between layers, and on the top layer. Cell size shall be approxiamtely 12-3/4 by 12-3/4 by 6 inches deep, inside dimensions. Filler pads shall be equal to the inside length and width of the box less 1/16 inch.

5.1.1.10 Cup, booster, 8800257.-One thousand (1000) booster cups shall be packaged in a fiber box with filler pads. Cups shall be placed in the box in 10 by 10 -100 cups per layer arrangement; 10 layers per box. A filler pad equal in size to the inside length and width of the box less 1/16 inch shall be placed between each layer of cups. Box size shall be approximately 17-1/8 by 17-1/8 by 9-5/8 inches n depth inside dimensions. Additional filler pads shall be added on top of contents as required for a tight package.

5.1.2 Requirements.-Fiberboard boxes shall conform to Specification PPP-B-636, Type CF, Class Domestic, Variety SW, Grade 200. Closure of boxes shall conform to paragraph 30.3 of the box specification. All fiberboard interior package components shall be construted of material conforming to PPP-F-320, Type CF, Class Domestic, Variety SW, Grade 200. Minor modifications of packaging material dimensions to provide a proper fit of all parts are permissible.

5.2 Packing

5.2.1 Level C.-Unit and intermediate packages shall be packed in a manner that will insure safe delivery by common carrier from the contractor's plant to the first receiving activity and comply with uniform freight classification requirements. Unit of intermediate fiberboard boxes may serve as the shipping container when they meet the above requirements.

5.3 Shipping.-When component parts from more than one lot are shipped as a carload, each lot must be kept separate and the division between lots clearly indicated to prevent mixing of lots in transit.

5.4 Marking.-Marking of all packaging and packing shall comply with MIL-STD-1169.

6. NOTES

6.1 Ordering data.-Procurement document shall specify the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

a. Title, number and date of this specification.
b. Data cards.-Data cards shall be prepared for each lot in accordance with the information specified in Standard MIL-STD-1167.

6.2 Inspection equipment.-The contractor shall design inspection equipment as required by the inspection Equipment Lists (EL) referenced on the applicable ET in accordance with the instructions of paragraphs 6.2.1 through 6.2.5. These code numbers are used to correlate the characteristucs cited on Equipment Lists with the inspections listed in this specification. They should also be cited as references on drawings of equipment designs submitted by the contractor (see 6.2.5).

6.2.1 Inspection equipment lists (EL).-Inspectin equipment lists indicate the availability of inspection equipment designs by showing in the "number" column of the list of inspection equipment (Form SMUPA 1010) the numbers of drawings or Federal Stock numbers of existing equipment designs, or codes as indicated in paragraph 6.2.2. Design action required of the contractor is described in paragraphs 6.2.3 and 6.2.4. The contractor will be required to prepare detailed drawings in accordance with 6.2.4 for all the equipment coded as "Contractor Design" in the number column. These contractor designs must be approved by the Government prior to fabrication or procuring of the equipment. Designs shall be submitted for approval as specified in 6.2.5.

6.2.2 Inspection equipment list codes.-The inspection equipment as defined in 6.2.3 and 6.2.4 will be designated in the EL by the following codes:

CD - Contractor design on controlled contractor format and/or commercial equipment.
MU - Army design mandatory for use.

6.2.3 Army designs.-Army designs are reflected on detailed drawings which completely depict all the information necessary for the fabrication of the item of ispection equiment. The contractor need provide no design when an Army design is listed for an item of inspection equipment. Army designs fall into two basic classifications; mandatory (designated "MU") and non-mandatory (indicated by drawing or Federal Stock Number). When an inspection equipment list references mandatory Army designs, the contractor shall comply with, and use these designs accordingly. The contractor may, however, in connection with non-mandatory designs, and with the approval of the Government, design alternate inspection equipment or use comparable commercial equipment to facilitate his operations. Such contractor prepared designs or commercial equipment selections must be approved by the Governemnt prior to fabrication or procuring of the equip-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

ment. Designs shall be submitted for approval as specified in 6.2.5.

6.2.4 Contractor designs.-Contractor designs are designs of inspection equipment for which the Government has assigned design responsibility to the contractor. Contractor designs shall be supported by detailed drawings which depict all information necessary to completely fabricate, calibrate and operate an item of inspection equipment. This requires that the necessary views, dimensions, materials, finish, notes, operating and calibration instructions be properly depicted in accordance with approved practices to the extent that further calculation or clarification will not be required. Unless otherwise specified, contractor designs may be developed on the format the contractor normally employs in his equipment design procedure provided such format reflects the detail and information specified above, subject to the following controls: All submitted contractor designs shall conform to MIL-D-1000, Category E, Form 2. For inspection equipment designs, the contractor shall refer to MIL-HDBK-204. Legibility and reproducibility shall permit conventional making of clearly understandable, high contrast reproductions. Contractors shall submit three copies of final designs as a flat set. Designs shall be submitted for approval as specified in 6.2.5.

6.2.5 Submission of contractor designs.-All submitted designs shall contain a reference to the paragraph number and defect number contained in Section 4 of this specification and the appropriate component or assembly drawing number and revision letter to which the specific design applies. Unless otherwise specified on the EL, all designs of equipment for inspection of defects classified as critical and major shall be submitted for approval to the Commanding Officer, Picatinny Arsenal, ATTN: SMUPA-ND. All other designs of inspection equipment shall be approved by the inspection element of the agency administering the contract; submission shall be as directed by the contracting officer. Partial submission of inspection equipment designs is permissible and encouraged. However, the Arsenal completion date for design review will be based on the date of the final submission of designs. Picatinny Arsenal design review will be accomplished normally within one month after receipt.

6.3 Quality assurance provisions of other documents.-The quality assurance provisions of other documents which are required to be part of the contractor's written description include, but are not limited to, those which relate to plating or other protective coating, physical chemical and other properties for which specific quality assurance or inspection provisions are included in the applicable material and process specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

6.4 Submission of initial production samples.-Instructions as to the location for evaluation of initial production shall be obtained from the contracting officer. Upon receipt of such request, the contracting officer shall advise Picatinny Arsenal and instructions will be issued accordingly. All inquiries should be forwarded to: Commanding Officer, Picatinny Arsenal ATTN: SMUPA-NI.

6.5 Reference point.-A reference point shall be established on the bottom edge of the slider cavity 3/16 inch from the edge of the lead cup cavity as shown on Figure 1.

6.6 Approval of Sliders, slider springs and slider plugs for use in ballistic tests. Sliders, slider springs and slider plugs for use in ballistic tests prescribed herein shall come from either one of the following sources:

a. A separately procured lot of sliders, slider springs and slider plugs from one lot interfix number from one manufacturer.
b. An accepted lot of Fuze, PD, M525 Metal Parts (Less Head Assembly) from one lot interfix number from one manufacturer.


Approval of lots of sliders, slider springs and slider plugs shall be determined by the certification of a Government inspector that such lots have passed Government inspection and conform fully with the requirements of paragraphs 4.3.2.2, 4.3.2.3 and 4.3.2.4 of Specification MIL-F-60323(MU)A dated 9 August 1971.

Custodian:
ARMY-MU


Preparing Activity:
ARMY-MU

Project Number: 1390-A-

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.

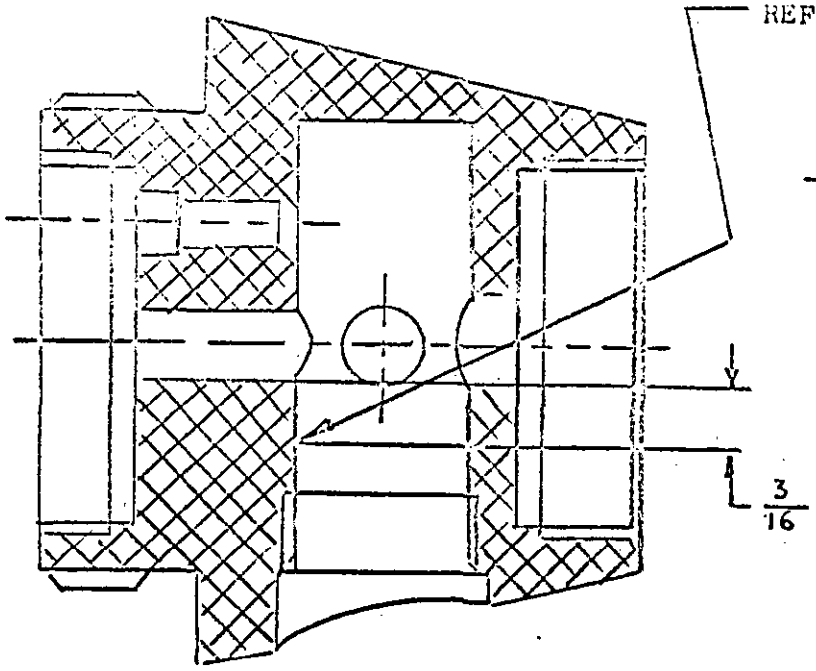

SECTION TO BE CONSIDERED SHOWING POSITION OF REFERENCE POINT.

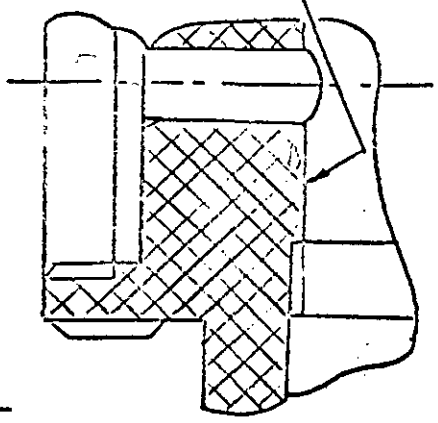

REJECTABLE

LESS THAN 3/16" ACCUMULATE METAL FROM REFERENCE POINT TO LEAD CUP CAVITY BY SHORTEST PATH.

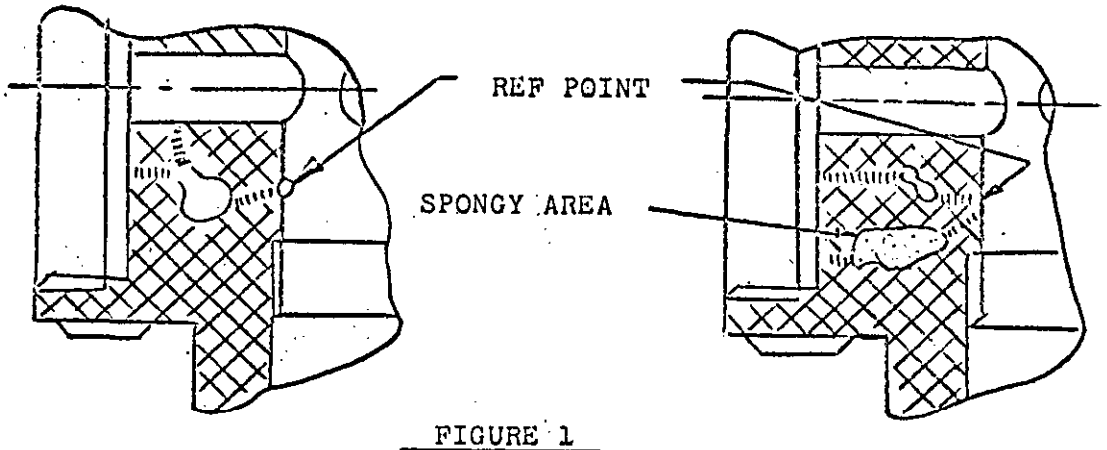


FIGURE 1

ACCEPTABLE

MORE THAN 1/4" ACCUMULATED METAL FROM REFERENCE POINT TO BOOSTER CAVITY AND MORE THAN 3/16 ACCUMULATED METAL FROM REFERENCH POINT TO LEAD CUP CAVITY BY SHORTEST PATHS.

REJECTABLE

LESS THAN 1/4" ACCUMULATED METAL FROM REFERENCE POINT TO BOOSTER CAVITY BY SHORTEST PATH WITH THE CONSIDERATION THAT SPONGY AREA IS TAKEN AS A COMPLETE VOID

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:29Z
Check the source to verify that this is the current version before use.