MILITARY SPECIFICATION

INDICATOR, REMOTE ID-2403/ARC

This specification is approved for use by the US Army Aviation Systems Command, US Army Avionics Research and Development Activity, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of remote display unit which interoperates with the Control Unit, Communication System C-11746(V)( )/ARC. This remote indicator unit is designated ID-2403/ARC (See 6.4).

2. APPLICABLE DOCUMENTS. The following document, of the issue as outlined in paragraph 2.1 shall form a part of this specification to the extent specified herein.

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

NN-P-71	Pallets, Material Handling, Wood, Stringer Construction, 2-Way and 4-Way (Partial).
QQ-S-781	Strapping, Steel, and Seals.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock Corner.
PPP-B-636	Box, Shipping, Fiberboard.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Avionics Research & Development Activity, ATTN: SAVAA-C, Fort Monmouth, New Jersey 07703 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 5895

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T00:02Z
Check the source to verify that this is the currentversion before use.

PPP-B-640	Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-F-320	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-S-760	Strapping, Nonmetallic (and Connectors).
PPP-T-97	Tape, Pressure-Sensitive, Adhesive, Filament Reinforced.

MILITARY

MIL-P-116	Preservation & Packaging, Methods of.
MIL-E-5400	Electronic Equipment, Airborne, General Specification for.
MIL-F-7179	Finishes and Coatings, Protection of Aerospace Weapons Systems, Structures, and Part.
MIL-P-7788	Panels, Information, Integrally Illuminated.
MIL-P-11268	Parts, Materials and Processes Used in Electronic Equipment.
MIL-M-13231	Marking of Electronic Items.
MIL-S-19500	Semiconductor Device, General Specification for.
MIL-P-19644	Plastic Molding Material (Polystyrene Foam, Expanded Bead).
MIL-C-25050	Colors, Aeronautical Lights and Lighting Equipment, General Requirements for.
MIL-P-26514	Polyurethane Foam, Rigid or Flexible for Packaging.
MIL-P-55110	Printed Wiring Boards, General Specification for.
MIL-C-58111	Control Unit, Communication System C-11746(V)( )/ARC.
MIL-L-85762	Lighting, Aircraft, Interior, AN/AVS-6 Aviator's Night Vision IMAGING System (ANVIS) Compatible.

STANDARDS

FEDERAL

FED-STD-595	Color Requirements for Individual Color Chips.

MILITARY

MIL-STD-105	Sampling Procedures and Tables of Inspection by Attributes.
MIL-STD-129	Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

MIL-STD-147	Palletized Unit Loads.
MIL-STD-252	Classification of Visual and Mechanical Defects.
MIL-STD-454	Standard General Requirements for Electronic Equipment.
MIL-STD-461A (Notice #4)	Electromagnetic Interference Characteristics Requirements for Equipments.
MIL-STD-462 (Notice #2)	Electromagnetic Interference Characteristics, Measurements of.
MIL-STD-704	Aircraft Electric Power Characteristics.
MS25212 (ASG)	Control Panel, Console Type, Aircraft Equipment, Basic Dimension.

HANDBOOKS

MIL-HDBK-217	Reliability Prediction of Electronic Equipment.

2.1.2 Other Government drawings. The following other Government drawing forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation."

DRAWINGS

Avionics Research and Development Activity (FSCM 57045)

D6003001	Indicator, Remote ID-2403/ARC.

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.1.3 Specifications of exact issue. The following documents of the exact issue shown form a part of this specification to the extent specified herein. In the event of conflict between the documents referenced herein and the contents of this specification, the contents of this specification shall be considered a superseding requirement.

MIL-STD-781B	Reliability Design Qualification and Production Acceptance Tests; Exponential Distribution
MIL-STD-810C	Environmental Test Methods and Engineering Guidelines.

2.1.4 Other Publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted shall be those listed in the issue of the DoDISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS shall be the issue of the non-government documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:02Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY OF TESTING MATERIALS

D-3951 Jan 82 Commercial Packaging

(Application for copies should be addressed to the American Society for Testing Materials (ASTM), 1916 Race Street, Philadelphia, PA 19103.)

(Non-government standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The Remote Indicator is a light-weight solid state unit containing lamps and diode transistor logic to indicate the selected channel of the associated Control Unit, Communication System C-11746(V)( )/ARC. It also provides information via an illuminated panel as to radio channel assignments and NAV channel assignments. Lighting is designed to be night vision goggle compatible. The lighting circuit is compatible with the panel dimming and lamp test configuration in the AH-64 helicopter. Indicator lighting operates from 28 volts DC nominal. Panel lighting operates from 5 volts AC/DC. An integral cable adapts the unit to the AH-64 aircraft wiring. The indicator lighting is sunlight readable.

3.2 Construction. The units shall be constructed in accordance with the following drawing and data list:

D6003001 Indicator, Remote ID-2403/ARC

3.2.1 Weight (See 4.11.1). The weight of the completely assembled unit including integral cable shall not exceed 1.7 lbs.

3.2.2 Outline Dimensions (See 4 11). The dimensions of the completed assembled unit shall conform to the requirements of MS25212(ASG) within the following limitations and exclusive of the cable.

Panel/Housing Height	1.875 in. max. (4.76 cm)
Panel Width	5.75 in. max. (14.60 cm)
Housing Width	5.0 in. max. (12.77 cm)
Housing Depth (From mounting surface and less connector)	2.9 in. max. (7.37 cm)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

3.3 First article. When specified in the contract or purchase order, the contractor shall furnish First Article units as required (see 4.3 and 6.2d).

3.4 Finish (See 4.4). The case of the control shall be black, Color Number 37038 of FED-STD-595. The finishes and protective coatings used on all parts shall be in accordance with MIL-E-5400 and MIL-F-7179. Protective coatings shall be field restorable. All parts shall be suitably treated or finished so as to provide protection from corrosion in accordance with 3.1.2 of MIL-F-7179.

3.5 Securing of parts (See 4.11).

3.5.1 General. Brackets, lugs, inserts, bolts, and other mounting arrangements shall retain items securely when subjected to specified service conditions.

3.6 Marking (See 4.4).

3.6.1 General. Marking shall conform to MIL-M-13231. Front panel marking shall be in accordance with equipment drawings.

3.6.2 Visibility. Wherever practicable, parts shall be so mounted that their identification markings will be readily visible with minimum disassembly of the equipment.

3.6.3 Serial numbers. The Remote Indicator Unit shall be serial numbered.

3.6.4 Front Panel (See 4.4).

3.6.4.1 Panel Construction. The unit shall have a front information and annunciator panel which shall be illuminated by lamps projecting into the rear of the panel. The lamps are mounted on a circuit board inside the front panel assembly. The panel shall contain optical filters to provide green primary lighting to provide compatibility with night vision goggles. Panel fabrication shall be in accordance with Class-1-R of MIL-P-7788E (Except the illumination shall be ANVIS GREEN A). The panel lettering shall be Alternate Gothic No. 3.

3.6.4.2 Information Lighting (6 lamps) (See 4.4).

3.6.4.2.1 Chromaticity. Normal legend illumination shall be ANVIS GREEN A with a U' coordinate of .099, V' coordinate of .544 and a radius of .034 on the 1976 UCS chromaticity diagram measured at 0.1 FT Lambert display luminance.

3.6.4.2.2 Spectral Radiance. The spectral radiance shall be such that the Anvis Radiance (AR), shall not exceed 1.7×10^{-10}AR when illuminated to produce 0.1 FT Lambert (FL) display luminance when measured as per the requirements of MIL-L-85762.

3.6.4.2.3 Lamps. Lighting shall meet the requirements as specified in the drawing (See 3.2).

3.6.4.3 Annunciators (5 double lamps) (See 4.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

3.6.4.3.1 Chromaticity and Spectral Radiance. The chromaticity shall fall within the area noted as aviation green of MIL-C-25050, (CIE Chromaticity diagram) and with a dominant wavelength of 510±15 nm and allowing no more than one percent of the relative peak amplitude to exist between 600 nm and 930 nanometers. Measurements to be made at 15.0 FL display luminance.

3.6.4.3.2 Lamps. Lighting shall meet the requirements as specified in the drawing (See 3.2).

3.6.4.4 Light Leaks. The panel shall not exhibit light leakage when powered for normal bright illumination.

3.6.5 Interface Wiring (See 4.9.6). The integral cable schematic is shown in figure 1.

3.7 Parts, material and processes; general (See 4.11). In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein shall apply.

3.8 Printed wiring assemblies (See 4.4). Printed wiring assemblies shall be processed for compliance with the requirements specified on the equipment drawings and MIL-P-55110 in order not to affect life and serviceability of the assemblies.

3.9 Semiconductors (transistors and diodes) (See 4.4). These electron devices (semiconductors and diodes) shall conform to MIL-S-19500 and the equipment drawings.

3.10 Tropicalization of materials (See 6.2.g). Materials shall be treated as follows:

3.10.1 Treating materials. Treating materials containing a mercury-bearing fungicide shall not be used. The contractor shall determine that the treating material is compatible with the material or surface to be treated. Selection of treating materials shall be such that any increase in flammability of treated material will be held to the practical minimum.

3.10.2 Toxicity. Treating materials shall cause no skin irritation or other injury to personnel handling the treated material during fabrication, transportation, operation, or maintenance of the equipment, or during use of the finished items when used for the purpose intended.

3.10.3 Flexibility. Treatment shall not affect the flexibility of treated materials, to the extent that the equipment may fail to meet specified requirements when subjected to specified service conditions.

3.11 Environmental service conditions. The equipment shall meet the operating and nonoperating service condition requirements of MIL-E-5400 for Class 1A equipment, except as specified below. The equipment shall be operable without degradation in specified performance before, during and after environmental testing unless otherwise specified herein. In the event of a relevant failure during an environmental test neccessitating a corrective action, the test will be repeated upon completion of the repair or modification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

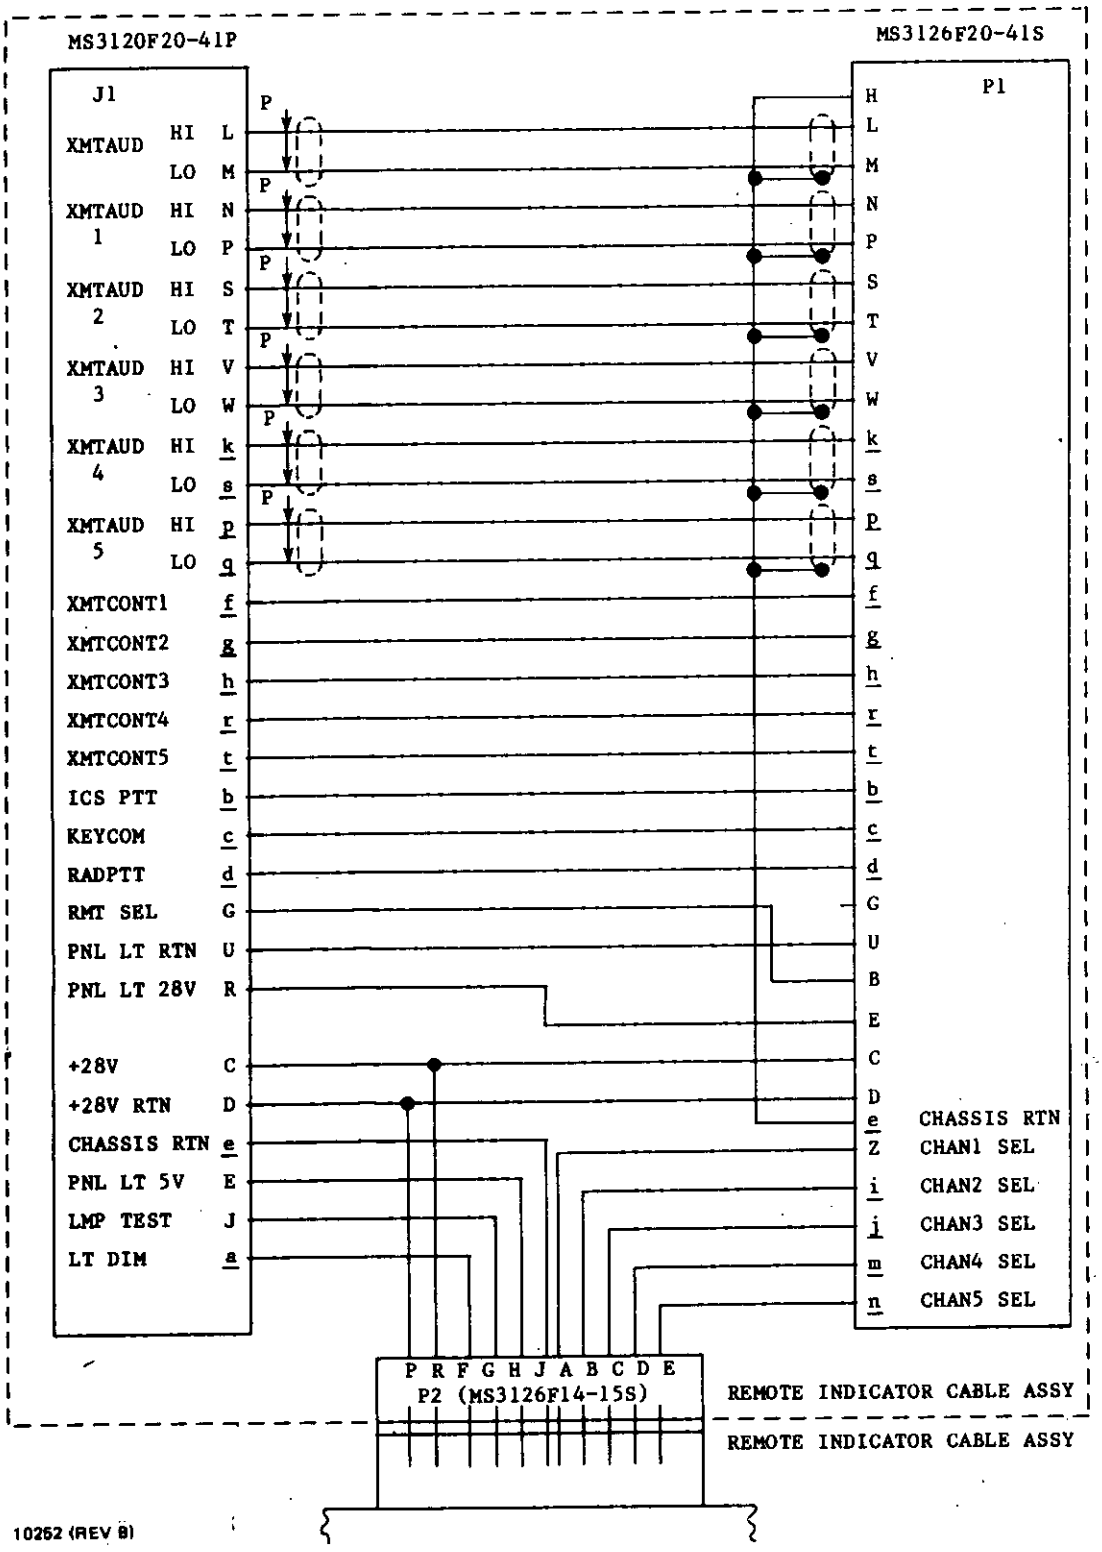


FIGURE 1. Remote Indicator/Cable Assembly Wiring Connections

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

3.11.1 Temperature-altitude (See 4.8.1). The equipment shall comply with the temperature-altitude requirements set forth in MIL-E-5400 for class 1A equipment. In addition, it shall withstand air transportation in unpressurized aircraft up to 50,000 feet above sea level. The input supply voltages shall be from 17.0 to 33.0 volts dc.

3.11.2 Humidity (See 4.8.2). The equipment shall be operable without degradation in specified performance, and shall sustain no physical damage, during and after prolonged exposure to extreme high humidity levels as encountered in tropical areas.

3.11.3 Dust (See 4.8.3). The equipment shall withstand, in both operating and nonoperating conditions, exposure to dust particles.

3.11.4 Salt fog (See 4.8.4). The equipment shall be resistant to the corrosive effects of salt-sea atmosphere.

3.11.5 Fungus (See 4.8.5). The equipment, in the assembled and ready for delivery condition, shall provide no nutrients in material, coating or contaminant for or support fungal growth when tested in accordance with 4.8.5. Only inherently fungus resistant grades of materials per requirement 4, MIL-STD-454 shall be used. Prior to delivery, all fungus nutrient contaminants or residues shall be removed.

3.11.6 Explosive atmosphere (See 4.8.6). The equipment shall not cause ignition of an ambient-explosive gaseous mixture with air when operated in such an atmosphere.

3.11.7 Rain (See 4.8.7). The equipment shall be operable without degradation in specified performance, and shall sustain no physical damage during periods of heavy precipitation with intermittent wind.

3.11.8 Acceleration (See 4.8.8). The equipment shall be operable without degradation in specified performance, and sustain no physical damage, when exposed to steady-state acceleration levels of up to 6g for a duration of 1 minute.

3.11.9 Vibration and shock.

3.11.9.1 Vibration (See 4.8.9.1). The equipment (with vibration isolators in place, if any) shall operate satisfactorily when subjected to vibration within the frequency range and amplitude as shown in Figure 2, Curve IIIb, Sheet 3 of MIL-E-5400, truncated at 500 Hz.

3.11.9.2 Shock.

3.11.9.2.1 Basic design (See 4.8.9.2.1). The equipment shall not suffer damage or subsequently fail to provide specified performance when subjected to 18 impact shocks of 15 g, consisting of three shocks in opposite directions along each of three mutually perpendicular axes. Each shock impulse shall have a time duration of 11 +1 millisecond. The "g" value shall be within +10% when measured with a 0.2 to 250 Hz filter, and maximum "g" value shall occur at approximately 5-1/2 milliseconds.

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:02Z
Check the source to verify that this is the current version before use.

3.11.9.2.2 Bench handling (See 4.8.9.2.2). The equipment shall withstand shocks encountered in servicing.

3.11.9.2.3 Crash safety (See 4.8.9.2.3). The equipment shall withstand 12 impact shocks of 30 g's, consisting of two shocks in opposite directions along each of three mutually perpendicular axes. Each shock impulse shall have a time duration of 11 ± 1 milliseconds. The "g" value shall be within ±10 percent when measured with a 0.2 to 250 Hz filter and the maximum "g" value shall occur at approximately 5 ± 1/2 milliseconds. Bending and distortion shall be permitted, however, there shall be no failure to the attaching joints and the equipment or dummy load shall remain in place. Note: A dummy mass with outside structure and mounting points identical to the flight hardware and mass-loaded to be dynamically the same as the flight hardware may be used for the crash safety test.

3.12 Voltage protection, low and reverse (See 4.8.11). The unit(s) shall be subjected to and meet the requirements of 3.13.1 and shall show no visual damage after being subjected to 33 volts dc reverse polarity and continuous operation at 17 to 33 volts dc.

3.13 Electrical Requirements (See 4.9).

3.13.1 Input Power (See 4.9.4 and 4.9.5). The unit shall operated from normal 27.5 volt dc aircraft power as defined by MIL-STD-704 and shall maintain required performance other than light intensity over the entire range of 17.0 to 33.0 volts dc. It shall also maintain required performance other than light intensity when subjected to overvoltage.

In normal operation (one annunciator on) the input power requirements shall be

28V dc	2 Watts maximum
5V ac/dc	2.5 Watts maximum

During lamp test the input power requirements at 28V dc shall be 6 Watts maximum.

3.13.2 Annunciator Control (See 4.9.1 thru 4.9.3). When the appropriate control line is grounded the corresponding dual lamp annunciator will light.

When a voltage in the range of 17 to 33 volts is applied to the lamp test line all the annunciator lamps will light simultaneously but not at normal full brightness.

When a ground is applied to the Bright/Dim line, the annunciator lamps which are on, will be bright.

3.13.3 Transient protection (see 4.9.6). The unit(s) shall meet specified requirements after subjection to a +80 volt pulse and a -80 volt pulse for 0.2 second duration three (3) times within 1 minute. In addition,the unit shall meet specified

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:02Z
Check the source to verify that this is the currentversion before use.

requirements after subjection to a ±600 volt spike of 5 microseconds ±0.2 microseconds duration, applied three (3) times within 1 minute.

3.14 Electromagetic Interference. When the ID-2403 is connected to the C-11746 the combination shall meet the requirements of MIL-C-58111(AV) paragraph 3.14 "Electromagetic Interference."

3.15 Burn-In (See 4.6.2). Burn-in shall be performed as described in paragraph 4.6.2.

3.16 Reliability (See 4.6.3). The equipment mean time between failures shall be at least 15,000 hours when used in the following manner:

a. Ambient Temperature: - 54°C to +55°C

b. Duty Cycle: 100 percent (33-1/3 percent for each annunciator) (3 active annunciators) and (2 spaces without lamps)

c. Environment: Airborne

This requirement shall be demonstrated in accordance with paragraph 4.6.3.

3.17 Interchangeability (See 4.10). Like units, assemblies, subassemblies, and replaceable parts shall conform to Requirement 7 of MIL-STD-454 and shall be physically and functionally interchangeable without modification of such items or of the equipment.

3.18 Systems safety engineering (See 4.11).

3.18.1 Personnel hazards. Personnel hazards shall be kept to a minimum through compliance of configuration changes and parts selection with Requirement 1 of MIL-STD-454. Compliance with these requirements will be verified through a visual inspection.

3.18.2 Edge rounding exposed. Exposed edges shall be rounded to a minimum radius of 0.04 inch (1 mm), and exposed corners to a minimum of 0.5 inch (13 mm).

3.18.3 Radioactive materials. Radioactive materials shall not be used (e.g., luminous dials/markings, electron tubes, surge arrestors and lenses).

3.19 Workmanship (see 4.14). Workmanship shall be in accordance with Requirement 9 of MIL-STD-454.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection and test requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection and test requirements specified herein, unless disapproved by the Government. The Government reserves the right

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

to perform any of the inspections and tests set forth in the specification where such inspections and tests are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First Article inspection (does not include packaging (see 4.3)).

b. Inspection covered by subsidiary documents (see 4.4).

c. Quality conformance inspection.

(1) Quality conformance inspection of equipment before packaging (see 4.5).

(2) Quality conformance inspection of packaging (see 4.15).

4.3 First article. Unless otherwise specified in the contract or purchase order, the First Article inspection shall be performed by the contractor.

4.3.1 First article units. The contractor shall furnish that number of First Article units of the complete ID-2403/ARC as specified in the contract or purchase order.

4.3.2 First article inspection. The first article inspection shall consist of the inspections specified in subsidiary documents covering the items listed in 4.4, burn-in/reliability specified in 4.6, and the inspections specified for Group A, Group B and Group C (see tables I, II and III respectively). The inspection shall be performed in the following order: 4.4, 4.6, Group A and Group B for all units, and designated units for specific subgroups within Group C in accordance with 4.5.2.1. After completion of Group C environmental tests, conforming units shall be reinspected and shall pass all Group A inspections.

4.4 Inspection covered by subsidiary documents. The following shall be inspected under the applicable subsidiary documents as part of the inspection before preparation for delivery.

Item	Where Required
Finish	3.4
Marking, Lighting, and Interface	3.6
Printing Wiring Assemblies	3.8
Semi-conductors	3.9

4.5 Quality conformance inspection of equipment before packaging. Each unit of equipment shall be subjected to Burn-In (3.15) prior to inspection. The contractor shall perform the inspection specified in 4.4 and 4.5.1 through 4.5.5. This does not relieve the contractor of his responsibility for performing any additional in-

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:02Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection

Inspection	Req. Para.	Insp. Para.	AQL	
			Major	Minor
Visual & Mechanical	3.17 3.18	4.11		
Printed Circuit Assembly			.65%	2.5%
Complete Assembly			1.0%	4.0%
Electrical				
Information Lighting	3.13	4.9.5	*1.0% for combined Groups	
Annunciator Control	3.13.2	4.9.1		
		4.9.2		
		4.9.3		
*Note: All electrical defects are considered major				

TABLE II. Group B inspection

Inspection	Req. Para.	Insp. Para.	AQL
Subgroup I			
Input Power	3.13	4.9.4/4.9.5	6.5%
Weight	3.2.1	4.11.1	-
Transient Protection	3.13.3	4.9.7	6.5%
Subgroup II			
Interchangeability	3.17	4.10	6.5%

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:02Z
Check the source to verify that this is the current version before use.

TABLE III. Group C inspection

	REQ. PARAGRAPH				INSPECTION PARAGRAPH
	UNIT 1	UNIT 2	UNIT 3	UNIT 4	
Subgroup I:					
Voltage protection		3.12			4.8.11
Temperature-altitude	3.11.1				4.8.1
Humidity	3.11.2				4.8.2
Vibration			3.11.9.1		4.8.9.1
Shock			3.11.9.2.1 & 3.11.9.2.2		4.8.9.2
Dust			3.11.3		4.8.3
Subgroup II:					
Explosive atmosphere		3.11.6			4.8.6
Acceleration			3.11.8		4.8.8
Fungus			3.11.5		4.8.5
Salt Fog		3.11.4			4.8.4
Rain	3.11.7				4.8.7
Voltage - Front Panel		3.6.4			4.9.1
Crash Safety			3.11.9.2.3		4.8.9.2.3

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:02Z
Check the source to verify that this is the current version before use.

spection which is necessary to control the quality of the product and to assure compliance with all specification requirements. Failure to meet any requirement as a result of Burn-In shall be classified as a defect and recorded as such. The Government will review and evaluate the contractor's inspection procedures and examine the contractor's inspection records. In addition, the Government at its discretion, may perform all or any part of the specified inspections, to verify the contractor's compliance with specified requirements. Test equipment for Government verification inspection shall be made available by the contractor.

4.5.1 Group A inspection. Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in table I. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined here, or in the contract or purchase order, shall be in accordance with MIL-STD-105. Each lot shall be subjected to sampling inspection, utilizing the procedures of MIL-STD-105, using the general inspection levels, and AQL's indicated in table I. Group A inspection shall be performed in any order which is satisfactory to the Government. Subsequent handling of the units shall be minimized to reduce possibility of damage to the units.

4.5.2 Group B and C inspection. This inspection, including sampling, shall conform to table II and to the procedures for small sample inspection of MIL-STD-105 using the special inpsection levels. The AQL shall be 6.5 percent defective and the inspection level shall be S4 for normal, tightened and reduced inspection. Group B inspection shall normally be performed on inspection lots that have passed Group A inspection and on samples selected from units that have been subjected to and met the Group A inspection.

4.5.2.1 Subgroup I. All units selected for group B tests will be subjected to subgroup I tests.

4.5.2.2 Subgroup II. Four units of these selected for group B tests will be subjected to subgroup II tests.

4.5.3 Order of inspection within Group B. Group B inpsection shall be performed in any order which is satisfactory to the Government.

4.5.4 Group C inspection. This inspection shall be as listed in table III and shall be performed on lots that have been subjected to and met Group A and Group B inspections. No defects shall be allowed. Sample unit(s) shall be selected in accordance with 4.5.4.1.

4.5.4.1 Sampling for inspection. Units shall be selected at random for each group of inspections in table III. The first samples selected shall be from the first quality conformance inspection production lot(s). Selection of these samples shall be as specified and within 30 calendar days (45 calendar days for the fungus test). After selection, the samples shall have been subjected to and completed the Group C inspections (see 6.3).

4.5.4.1.1 Subgroup I. For this subgroup, two (2) units from the first eight (8) production units of the first 500 or part thereof on order shall be selected for the

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:02Z
Check the source to verify that this is the currentversion before use.

first Group C inspection. If quantities in excess of 500 are on order, two (2) units from each successive 500 shall be selected for Group C inspection.

4.5.4.1.2 Subgroup II. For this subgroup, two (2) units from the first eight (8) production units shall be selected for the first Group C inspection. If quantities in excess of 1000 are on order, two (2) units from each successive 1000 shall be selected for group C inspection. These samples may be the same units selected for Subgroup I tests.

4.5.4 2 Order of inspection within Group C. Group C inspection shall be performed in an order which is satisfactory to the Government.

4.5.4.3 Group C failures. Actions required relative to Group C failures shall be as secified in the contract.

4.5.5 Reinspection of conforming Group C sample units. Unless otherwise specified, lots which have been subjected to and passed Group C inspection may be delivered on the contract or order, provided all damagne is repaired, cleaned of all foreigh matter, and the sample units are resubjected to and pass Group A inspection.

4.6 Burn-in and reliability.

4.6.1 Conditions precedent to burn-in and reliability testing. Prior to doing any burn-in or reliability acceptance testing, the contractor shall perform a thermal and vibration survey in accordance with the paragraphs titled "Thermal Survey" and "Vibration Survey" of MIL-STD-781.

4.6.2 Burn-in. Each deliverable equipment shall be subjected to a 48 hour on-time burn-in period, the last 24 hours of which shall be failure free. Each unit which fails during the last 24 hour period shall be repaired and returned to test until it successfully survives a 24 hour period without failure. Failures which occur during burn-in test shall be noted and reported, but will not be counted towards the establishment of the equipment MTBF. Duty cycle imposed, vibration, environmental test profile and parameters to be measured shall be those included in the contractor's approved burn-in test procedure.

4.6.3 Reliability. The reliability of the unit shall be verified by analysis through the use of the mathematical models of and in accordance with MIL Handbook 217, Rev. D, Notice 1.

4.7 Standard test conditions. Unless otherwise specified herein, inspections shall be performed under test conditions of GENERAL REQUIREMENTS, Test Conditions, of MIL-STD-810 and the following conditions:

a. Input power: 28.0 $\pm$ 0.5 volts dc.

b. Operational duty cycle: continuous

4.8 Environmental test procedures. The unit(s) shall be subjected to the following test methods of MIL-STD-810, and other tests as specified to determine compliance with service condition requirements of 3.11. Electrical tests performed

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:02Z
Check the source to verify that this is the currentversion before use.

before, during and after environmental testing shall include those tests required to determine compliance with paragraphs 3.13.2.

4.8.1 Temperature-altitude. The unit(s) shall be subjected to the test of Method 504.1, Procedure 1, for equipment Category 4. In addition, the procedure shall include a 1 hour exposure (non-operation) to a pressure of 3.4 inch of Hg, simulating air-transport at 50,000 feet.

4.8.2 Humidity. The unit(s) shall be subjected to the test of Method 507.1, Procedure II for compliance with 3.11.2. In Step 6 of Procedure II, measurements shall be taken during the last five hours of the last cycle.

4.8.3 Dust. The unit(s) shall be subjected to the test of Method 510.1, Procedure 1, with the exception that the air velocity in Steps 1, 2 and 3 shall be 200 ± 100 FPM. Step 3 may proceed immediately after stabilization in Step 2 if desired.

4.8.4 Salt fog. The equipment shall be subjected to the test of Method 509.1 of MIL-STD-810. Electrical operation shall not be required. All external knobs and controls shall be operated after the test. There shall be no sticking or binding of any part, and there shall be no corrosion of finishes and metals. Such corrosion shall be defined as any visible degradation of the test item surfaces that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface.

4.8.5 Fungus. Unless otherwise specified by the contract the contractor shall furnish a statement of conformance to the requirements for use of non-nutrient materials only.

4.8.5.1 Fungus test. The equipment model in the assembled and as ready for delivery condition, shall be subjected to 28 days of Method 508.1, MIL-STD-810, except that the cyclic conditions listed under the paragraph titled "Incubation of Test Items" shall not be used. Instead, the conditions of 29°C (84°F) and 85% RH should be maintained throughout the test. The equipment test model shall not be specially cleaned for the fungus test, except for the cleaning it receives during or after production. If it is necessary for the manufacturer after assembly to remove accumulated production and handling contaminants by cleaning prior to packaging and delivery, the equipment shall not be tested for three days after cleaning to allow for complete evaporation of the cleaning compound. All enclosed or gasketed assemblies shall be opened and the interior sprayed with the specified mixed spore suspension. After 14 and 28 days of test, the control items per the paragraph titled "Control Items", of Method 508.1, MIL-STD-810 shall show profuse growth over at least 50% of the area of the control items. After 28 days, based upon visual examination, the equipment assembly shall pass if it shows no more than only sparse microbial growth with restricted tuberal growth development in an area of 1 to 10% or less of the total areas and no more than six unrelated minute colonies with mycelial development in areas only in other than critical circuit portions; such as terminal spacings, printed circuit boards, etc., with sparse growth due to random contamination or traces of unmixed material ingredients. The equipment shall be operated during the inspections step (the paragraph titled "INSPECTION", Method 508.1, MIL-STD-810). The equipment shall fail if it does not meet operational performance criteria or if it shows more than the growth specified above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

4.8.6 Explosive atmosphere. The equipment shall be subjected to the test of Method 511.1, Procedure I of MIL-STD-810.

4.8.7 Rain. The equipment with cables in place shall be exposed to a "steady state" rainfall of 4 ± 1 inches per hour on all surfaces of the test items for a total time duration of not less than 2 hours. After completion of the rain test, the units shall be removed from the test chamber and turned on within 10 minutes after test completion. The units shall be operated and tested to determine satisfactory system operation.

4.8.8 Acceleration. The equipment shall be subjected to the test of Method 513.2, Procedure II, of MIL-STD-810. The test level shall be 6g for at least 1 minute.

4.8.9 Vibration and shock.

4.8.9.1 Vibration. The equipment when normally mounted (with vibration isolators in place, if any), shall be subjected to the test of Method 514.2, Procedure I, Category C, curve M, of Figure 514.2.3 (Part 1), with exception of the frequency range, which shall be limited to 5-500-5 Hz. The time schedules shall be in accordance with table 514.2-III, except that the sweep time corresponding to Curve M shall be 30 minutes. The equipment shall be operated during the test. Also prior to, and following these tests, the equipment shall be operated in accordance with MIL-STD-810, General Requirements, "Performance of Test". The equipment shall not have any degradation in performance and shall not suffer any mechanical damage.

4.8.9.2 Shock.

4.8.9.2.1 Basic design. The equipment shall be subjected to the test of Method 516.2, Procedure I of MIL-STD-810. The shock pulses shall be in accordance with figure 516.2.2 for flight vehicle equipment.

4.8.9.2.2 Bench handling. The equipment shall be subjected to the test of Method 516.2, Procedure V, of MIL-STD-810.

4.8.9.2.3 Crash safety. The equipment shall be subjected to the test of Method 516.2, Procedure III, figure 516.2.2 of MIL-STD-810, for half-sine 30g, 11 ms curve, and meet the requirements of paragraph 3.11.9.2.3.

4.8.10 Test sequence. To eliminate cumulative effects of potentially damage inducing tests on a single test item, separate samples should be used for each test whenever possible. The test sequence of Table IV shall be used for limited sample size.

4.8.11 Voltage protection low and reverse. Apply plus 17 and 33 volts dc to pins J1-C and J1-D for 5 minutes at each voltage, and then apply 33 volts dc with plus to pin J1-D and negative to pin J1-C for 1 minute. The unit(s) shall meet the requirement of 3.12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

TABLE IV. Test sequence for limited sample size

U N I T S A V A I L A B L E

3			2		1
Unit 1	Unit 2	Unit 3	Unit 1	Unit 2	Unit 1
Temperature-ALT Rain	Explosion	Dust	Temperature-ALT Rain	Dust Explosion	Temperature-ALT Dust Explosion Rain
Humidity	Salt fog	Acceleration Vibration Shock Fungus	Humidity Salt fog	Acceleration Vibration Shock Fungus	Humidity Fungus (2) Salt fog (2) Acceleration Vibration Shock

NOTES:

(1) The tests above the broken line are considered non-damaging. The order of these tests and choice of units to use may be varied if convenient.

(2) Following fungus and salt fog testing, the test item shall be thoroughly washed, cleaned, dried, and refurbished, if necessary, before proceeding with subsequent tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

4.9 Electrical Test.

4.9.1 Annunciator Control. Apply power to the unit under test (UUT) by connecting 28 volts and 28 volt return to pins Cable P1- C, D respectively. Connect J1-a to J1-D.

Perform the following tests.

Jumper		Annunciator # ( ) shall
from Cable P1-	to Cable P1-	Light
Z	D	1
i	D	2
j	D	3
m	D	4
n	D	5

4.9.2 Lamp Test. Jumper cable J1-J to Cable J1-C.

All annunciator lamps shall light in a dimmed condition. Remove jumper J1-J to J1-C.

4.9.3 Bright/Dim. Jumper cable P1-Z to cable P1-D, annunciator 1 shall be illuminated at normal brightness.

Remove jumper from cable J1-a to cable J1-D.

Annunciator 1 shall be dimmed.

4.9.4 Input Power. Set power supply voltage to 17 volts and repeat tests of 4.9.1 through 4.9.3. Results shall be the same except that light intensity will be somewhat lower.

Set power supply voltage to 33 volts and repeat tests of 4.9.1 through 4.9.3. Results shall be the same except that light intensity will be somewhat higher.

At 28 volts input measure current required with one annunciator illuminated. This shall be done to verify compliance with normal power requirements of 3.13.1.

Also measure current required with lamp test activated (cable J1-pin J jumpered to J1-pin C). This shall be done to verify compliance with lamp test requirements of 3.13.1.

4.9.5 Information Lighting. Connect a source of 5 volts DC to pins cable J1-E with the return at cable J1-e.

The legend shall be illuminated uniformally.

Illumination shall be green. There shall be no spurious light leaks.

Source: https://assist.dla.mil -- Downloaded: 20261O-23T00:02Z
Check the source to verify that this is the current version before use.

4.9.6 Cable Continuity. The cable is to be checked for continuity per the requirements of 3.6.5 for all pins on J1 that are connected to pins on P1 using an ohmeter or other suitable continuity tester.

4.9.7 Transient protection. Under standard test conditions, apply a +80 volt pulse and -80 volt pulse for 0.2-second duration between pins J1-C and J1-D. Apply each pulse three (3) times within one (1) minute as specified in MIL-STD-704, Category "B". Perform both of these tests to determine compliance with 3.13.15. In addition, apply at least three (3) aperiodic spike waveforms between Pins J1-C and J1-D. The spike waveform, produced by a generator with a source impedance of 50 ± 50 ohms, shall satisfy the following requirements:

Open-circuit voltage: ±600 volts peak
Risetime: 0.9 ± 0.2 microseconds
Falltime: 10.0 ± 1.0 microseconds

4.9.8 Electromagnetic Interference. The ID-2403/ARC shall be connected via its integral cable to the C-11746 for the tests of paragraph 4.11 through 4.11.4 of MIL-C-58111(AV).

4.10 Interchangeability. The mechanical dimensions and electrical performance of parts shall be physically and electrically interchangeable among the unit(s). Mechanical dimensions and electrical performance required by the gauge drawings and equipment drawings shall be measured to determine conformance with physical and functional interchangeability requirements of 3.19. When a listed dimension or performance requirement is not within specified limits, it shall be considered a major defect. The following dimensions or performance shall be gauged or measured.

a. Mechanical (dimensions). The overall dimensions and mounting dimensions shall apply.

b. Electrical performance (assemblies). Shall be tested to determine compliance with the applicable performance requirements specified on the equipment drawings.

4.11 Mechanical and visual inspections. The unit(s) shall be examined to determine conformance to the requirements of this specification including markings; accuracy of dimensions; quality of workmanship; maximum weight allowed; use of proper materials, parts, and processes; freedom from visible defects or any other imperfections that would result in rejection of the unit; and requirements 1, 5, 7, 8 and 9 of MIL-STD-454. All moving parts shall be examined to ensure that they operate freely without sticking or binding, and yet fit with the accuracy required by this specification and the applicable drawing. Defects shall be classified in accordance with MIL-STD-252.

4.11.1 Weight. The unit(s) shall be weighed to determine compliance with 3.2.1.

4.12 Quality conformance inspection of packaging. Packaging shall be tested in accordance with MIL-P-116 to determine conformance to the requirements of Section 5. The rough handling test will be performed only when specified (see 6.2c).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A, B or Commercial, as specified in contract (see 6.2b).

5.1.1 Level A.

5.1.1.1 Cleaning. Indicator, Remote ID-2403/ARC shall be cleaned in accordance with process C-1 of MIL-P-116.

5.1.1.2 Drying. Indicator, Remote ID-2403/ARC shall be dried in accordance with the applicable procedure of MIL-P-116.

5.1.1.3 Preservative application. None required.

5.1.1.4 Unit packing. Unit packing shall be in accordance with the methods prescribed in MIL-P-116 as specified herein.

5.1.1.4.1 Technical literature. Each technical literature shall be unit packed method IC-1 of MIL-P-116.

5.1.1.4.2 Packaging. Indicator, Remote ID-2403/ARC shall be individually unit packed Method III of MIL-P-116 as follows: Cushion the unit on all surfaces with cells or pads, or both, fabricated of fiberboard conforming to PPP-F-320, Type CF, class weather-resistant, variety SW, Grade W5c, designed to protect all projections and absorb the shock of impact in handling and transit. As an alternate, cushioning material may be fabricated of plastic molding material conforming to MIL-P-19644 or polyurethane form conforming to MIL-P-26514. Place each cushioned unit within a close-fitting fiberboard box conforming to PPP-B-636, W5C. Place the technical literature, unit packed as specified in 5.1.1.4.1, on top of the contents directly below the lid of the box. Close the box in accordance with the appendix of the box specification.

5.1.2 Level B. Cleaning, drying, preservative application and unit packing shall be as specified in 5.1.1.

5.1.3 Commercial preservation. Preservation shall be in accordance with FED-STD-356.

5.2 Packing. Packing shall be Level A, B or Commercial, as specified (see 6.2b). Shipping containers for Level A and B shall be capable of stacking and supporting superimposed loads during shipment and storage without damaging the container(s) or its contents.

5.2.1 Level A. A quantity of Remote Indicator/Cable Assembly unit packed as specified in 5.1, shall be packed within a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, style 4, Class 2, or PPP-B-585, style 2 or 3, Class 3. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, 3 x 4-inch skids, laid

Source: https://assist.dla.mil -- Downloaded: 202640-23T00:02Z
Check the source to verify that this is the currentversion before use.

flat, shall be applied in accordance with the requirements of the container specification, or if not specified in the specification, in a manner which will adequately support the item and facilitate the use of material handling equipment. Closure and strapping shall be in accordance with the applicable container specification or appendix thereto except that metal strapping shall conform to QQ-S-781, Type I, Finish A.

5.2.1.1 Unitization. Palletization shall be required when: containers specified in 5.2.1 do not require skids; quantities per destination comprise a pallet load; and container size permits use of one of the pallet patterns of MIL-STD-147. A quantity of containers, packed as specified in 5.2.1, except that container strapping may be omitted, shall be placed on a pallet, load Type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, Type IV, Group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, Type I, Finish A, or shrink film.

5.2.2 Level B. A quantity of Remote Indicator/Cable Assembly unit packed as specified in 5.1, shall be packed within a close-fitting fiberboard box conforming to PPP-B-640, class 2, style E, or PPP-B-636, type CF, class weather resistant. The gross weight of boxes conforming to PPP-B-640 shall not exceed 250 pounds. Closure shall be in accordance with the appendix of the applicable box specification. Reinforcing shall be by pressure sensitive filament tape banding or nonmetallic strapping conforming to PPP-T-97 and PPP-S-760, respectively; selection of the material and application shall be in accordance with the appendix of the applicable box specification. When the gross weight exceeds 200 pounds, or the container length and width is 48 x 24 inches or more and the weight exceeds 100 pounds, containers will be pallet-mounted on pallets conforming to NN-P-71, group I or II woods. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, or shrink film. When a single unit is shipped to a single destination no packing is required; the unit container shall serve as the shipping container. Reinforcing shall be as specified above.

5.2.2.1 Unitization. Palletization shall be required when quantities per destination comprise a pallet load. A quantity of Indicator, Remote ID-2403/ARC, unit packed as specified in 5.1, shall be placed on a pallet, load type I, conforming to MIL-STD-147. The pallet shall conform to NN-P-71, type IV, group I or II woods. A fiberboard cap shall be employed over the load having two sides extending down the stacked load at least 12 inches to accommodate marking requirements. The cap shall be fabricated of fiberboard conforming to PPP-F-320, class weather-resistant, W5s or V3c. The load shall be "bonded" to the pallet by strapping conforming to QQ-S-781, type I, finish A, of shrink film.

5.2.3 Commercial packing. Packing shall be in accordance with ASTMD-3951, JAN 82.

5.3 Marking.

5.3.1 Military marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

5.3.2 Commercial marking. In addition to any special marking required by the contract or order, interior packs and exterior shipping containers shall be marked in accordance with ASTMD-3951, JAN 82.

6.0 NOTES.

6.1 Intended use. The Remote Indicator is intended to be used to provide indication of channel selection for the AH-64 Apache helicopter. It also has an illuminated legend for identification of channels. It is intended to be used in conjunction with the Control Unit, Communication System C-11746(V)()/ARC The panel illumination shall be night vision goggle compatible.

6.2 Ordering data. Procurement documents shall specify the following:

a. Title, number and date of this specification and any amendment thereto.

b. Level A, level B or Commercial preservation and packing (see section 5).

c. When rough handling is required.

d. First article inspection:

(1) Several first article unit(s) are generally required so that lengthy environmental tests can be completed on specified sample units while complete performance measurements can be made on one sample unit (see 3.3).

(2) First article pack(s) as follows:

Makeup of pack(s).

Number of each kind of pack to be submitted.

Inspection to be performed thereon (including rough handling).

e. Marking and shipment of sample of first article samples and production unit(s).

f. Place of final inspection.

g. Submission of the statement of treatment referenced in 3.10.4.

6.3 Group C inspection. Approval to ship unit(s) on order may be withheld, at the discretion of the Government pending decision from the procuring activity, until compliance with 4.5.2.1 is complete.

6.4 Nomenclature. The nomenclature assigned to the equipment covered by this specification is as follows:

Indicator, Remote ID-2403/ARC

Source: https://assist.dla.mil -- Downloaded: 202610-23T00:02Z
Check the source to verify that this is the current version before use.

6.5 Deviations. Request for deviations in packaging and packing design shall be supported by test data proving the ability of the equipment, packaged and packed in accordance with the proposed design change, to withstand the applicable tests for the selected method, including the rough handling tests in accordance with MIL-P-116. Deviation approval shall be contingent on availability of packaging and packing materials selected and economics realized (see Section 5).

6.6 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.7 Definitions

6.7.1 Branching. Branching is a connected arrangement of filaments (hyphae) formed by shoots or secondary stems growing from the main stem or filament (hyphae).

6.7.2 Growth colonization. Growth colonization is a mass of individual plants, generally of one species, living together; or a group of hyphae which is formed from one spore or cell and may be one individual plant. Colonization which completely covers the surface of the nutrient material constitutes abundant growth.

6.7.3 Microbial growth. Microbial growth is the growth of very minute organisms. Such organisms when present in large numbers may provide a colony visible to the naked eye.

6.7.4 Sporulation. Sporulation is the formation of minute unicellular reproductive or dormant bodies, called spores.

6.7.5 Tubular germination. Tubular germination is partial growth by the production of hyphae, which are tubular shaped fungal filaments. Tubular germination constitutes restricted individual spore growth not proceeding to colonization.

6.8 Subject term (key word) listing.

Intercommunication.

Custodian:
Army(AV)

Preparing Activity:
Army(AV)
(Project 5895-A355)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
Headquarters
U.S. Army Avionics R & D Activity
ATTN: SAVAA-C
Ft. Monmouth, NJ 07703-5401

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 Alexandria, VA

POSTAGE WILL BE PAID BY

Commander
U.S. Army Avionics Research & Development Activity
ATTN: SAVAA-C
Fort Monmouth, N.J. 07703-5401

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-58110(AV)	Indicator, Remote ID -2403/ARC

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE. HISA-FM 149-85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T00:02Z
Check the source to verify that this is the current version before use.