

MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, METALLIZED PLASTIC DIELECTRIC, DC-AC, IN NONMETAL CASES, ESTABLISHED RELIABILITY, STYLE CFR09

This specification sheet is approved for use by the Aeronautical Systems Division, AFSC(11), Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-55514.

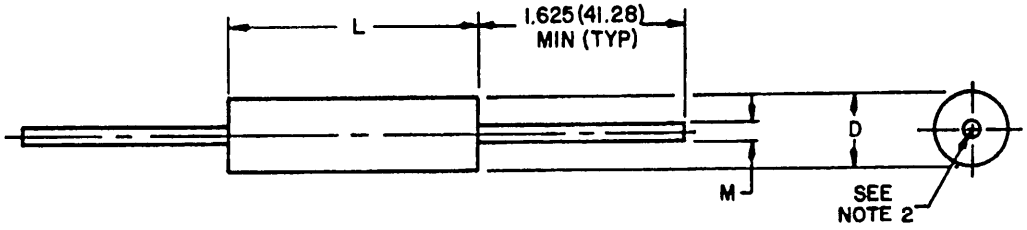



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Leads shall be located on centerline within ±.062 (1.57 mm) but not less than .03 (.8 mm) from edge of capacitor.
3. Millimeters are in parentheses.
4. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Style CFR09 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

50 VDC								
Type designation 1/	Capacitance (nom)	Capacitance tolerance available	Dimensions (in inches)			AC ratings (for sinusoidal operation from -55° to +105°C) 3/		
			D +.050 (T.27)	L +.050 (T.27)	M 2/	RMS current	RMS voltage 0-400 Hz	RMS voltage 4 kHz
	µF					Amperes	Volts	Volts
CFR09ARA563--	.056	F,G,J,K	.170 (4.32)	.400 (10.16)	.020 (0.51)	.180	25.0	25.0
CFR09ARA683--	.068		.170 (4.32)	.400	.020 (0.51)	.220		
CFR09ARA823--	.082		.190 (4.83)	.400	.020 (0.51)	.264		
CFR09ARA104--	.10		.230 (5.84)	.400	.025 (0.64)	.364		
CFR09ARA124--	.12		.230 (5.84)	.400	.025	.388		
CFR09ARA154--	.15		.230 (5.84)	.400	.025	.488		
CFR09ARA184--	.18		.260 (6.60)	.400	.025	.584		
CFR09ARA224--	.22		.260 (6.60)	.400	.025	.712		
CFR09ARA274--	.27		.230 (5.84)	.530 (13.46)	.025	.376		24.0
CFR09ARA334--	.33		.260 (6.60)	.530	.025	.460		22.0
CFR09ARA394--	.39		.260 (6.60)	.530	.025	.540		21.5
CFR09ARA474--	.47		.310 (7.87)	.530	.025	.652		20.0
CFR09ARA564--	.56		.310 (7.87)	.530	.025	.780		19.0
CFR09ARA684--	.68		.350 (8.89)	.530	.025	1.434		18.0
CFR09ARA824--	.82		.350 (8.89)	.530	.025	1.710		17.0
CFR09ARA105--	1.0		.310 (7.87)	.750 (19.05)	.025	.884		15.0
CFR09ARA125--	1.2		.310 (7.87)	.750	.025	1.060		14.5
CFR09ARA155--	1.5		.350 (8.89)	.750	.025	2.004		13.0
CFR09ARA185--	1.8		.400 (10.16)	.750	.025	2.388		12.0
CFR09ARA205--	2.0		.400 (10.16)	.750	.025	2.652		11.5
CFR09ARA225--	2.2		.400 (10.16)	.750	.025	2.484		11.0
CFR09ARA275--	2.7		.350 (8.89)	1.030 (26.16)	.025	2.076		10.5
CFR09ARA305--	3.0		.400 (10.16)	1.030	.025	2.305		10.0
CFR09ARA335--	3.3		.400 (10.16)	1.030	.025	2.550		9.5
CFR09ARA395--	3.9		.440 (11.18)	1.030	.032 (0.81)	2.994		8.5
CFR09ARA475--	4.7		.440 (11.18)	1.030	.032	3.264		8.0
CFR09ARA505--	5.0		.490 (12.45)	1.030	.032	3.834		7.5
CFR09ARA565--	5.6		.490 (12.45)	1.030	.032	4.000		7.0
CFR09ARA685--	6.8		.490 (12.45)	1.250 (31.75)	.032			6.5
CFR09ARA825--	8.2		.560 (14.22)	1.250 (31.75)	.032			5.5
CFR09ARA106--	10.0		.610 (15.49)	1.250 (31.75)	.032			5.0
CFR09ARA126--	12.0		.610 (15.49)	1.500 (38.10)	.032			4.5
CFR09ARA156--	15.0		.610 (15.49)	1.500 (38.10)	.032			4.0
CFR09ARA186--	18.0		.670 (17.02)	1.500 (38.10)	.032			3.5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

75 VDC								
Type designation 1/	Capacitance (nom)	Capacitance tolerance available	Dimensions (in inches) D +.050 (1.27)	Dimensions (in inches) L +.050 (1.27)	Dimensions (in inches) M 2/	AC ratings (for sinusoidal operation from -55° to +105°C) 3/ RMS current	AC ratings (for sinusoidal operation from -55° to +105°C) 3/ RMS voltage 0-400 Hz	AC ratings (for sinusoidal operation from -55° to +105°C) 3/ RMS voltage 4 kHz
	µF					Amperes	Volts	Volts
CFR09ARG333--	.033	F,G,J,K	.170 (4.32)	.400 (10.16)	.020 (0.51)	.140	39.0	39.0
CFR09ARG393--	.039		.170 (4.32)	.400	.020	.168		
CFR09ARG473--	.047		.190 (4.83)	.400	.020	.200		
CFR09ARG563--	.056		.190 (4.83)	.400	.020	.240		
CFR09ARG683--	.068		.230 (5.84)	.400	.025 (0.64)	.288		
CFR09ARG823--	.082		.230 (5.84)	.400	.025	.384		
CFR09ARG104--	.10		.260 (6.60)	.400	.025	.424		37.0
CFR09ARG124--	.12		.260 (6.60)	.400	.025	.512		35.0
CFR09ARG154--	.15		.230 (5.84)	.530 (13.46)	.025	.276		33.0
CFR09ARG184--	.18		.230 (5.84)	.530	.025	.328		31.0
CFR09ARG224--	.22		.260 (6.60)	.530	.025	.404		29.0
CFR09ARG274--	.27		.260 (6.60)	.530	.025	.496		27.0
CFR09ARG334--	.33		.310 (7.87)	.530	.025	.604		25.0
CFR09ARG394--	.39		.310 (7.87)	.530	.025	.716		24.0
CFR09ARG474--	.47		.350 (8.89)	.530	.025	1.290		22.5
CFR09ARG564--	.56		.310 (7.87)	.750 (19.05)	.025	.652		21.0
CFR09ARG684--	.68		.310 (7.87)	.750	.025	.792		19.0
CFR09ARG824--	.82		.350 (8.89)	.750	.025	1.212		17.5
CFR09ARG105--	1.0		.350 (8.89)	.750	.025	1.434		16.0
CFR09ARG125--	1.2		.400 (10.16)	.750	.025	1.770		15.0
CFR09ARG155--	1.5		.350 (8.89)	1.030 (26.16)	.025	1.374		14.0
CFR09ARG185--	1.8		.400 (10.16)	1.030	.025	1.818		13.0
CFR09ARG205--	2.0		.400 (10.16)	1.030	.025	1.830		12.5
CFR09ARG225--	2.2		.400 (10.16)	1.030	.025	2.010		12.0
CFR09ARG275--	2.7		.440 (11.18)	1.030	.032 (0.81)	2.466		11.5
CFR09ARG305--	3.0		.490 (12.45)	1.030	.032	2.742		11.0
CFR09ARG335--	3.3		.490 (12.45)	1.030	.032	3.018		10.5
CFR09ARG395--	3.9		.560 (14.22)	1.030	.032	3.942		10.0
CFR09ARG475--	4.7		.560	1.030	.032	4.000		9.0
CFR09ARG505--	5.0		.560	1.250 (31.75)	.032	3.558		8.5
CFR09ARG565--	5.6		.560	1.250	.032	3.984		8.0
CFR09ARG685--	6.8		.610 (15.49)	1.250	.032	4.000		7.0
CFR09ARG825--	8.2		.670 (17.02)	1.250	.032			6.5
CFR09ARG106--	10.0		.670 (17.02)	1.500 (38.10)	.032			5.5
CFR09ARG126--	12.0		.740 (18.80)	1.500 (38.10)	.032			4.5
CFR09ARG156--	15.0		.740 (18.80)	1.500 (38.10)	.032		37.0	3.5

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

100 VDC								
Type designation 1/	Capacitance (nom)	Capacitance tolerance available	Dimensions (in inches)			AC ratings (for sinusoidal operation from -55° to +105°C) 3/		
			D +.050 (1.27)	L +.050 (1.27)	M 2/	RMS current	RMS voltage 0-400 Hz	RMS voltage 4 kHz
	µF					Amperes	Volts	Volts
CFR09ARB273--	.027	F,G,J,K	.170 (4.32)	.400 (10.16)	.020 (0.51)	.128	53.0	53.0
CFR09ARB333--	.033		.190 (4.83)	.400	.020 (0.51)	.168		
CFR09ARB393--	.039		.190 (4.83)	.400	.020 (0.51)	.200		
CFR09ARB473--	.047		.230 (5.84)	.400	.025 (0.64)	.240		
CFR09ARB563--	.056		.230 (5.84)	.400	.025	.288		
CFR09ARB683--	.068		.260 (6.60)	.400	.025	.348		52.0
CFR09ARB823--	.082		.260 (6.60)	.400	.025	.420		49.0
CFR09ARB104--	.10		.230 (5.84)	.530 (13.46)	.025	.308		46.0
CFR09ARB124--	.12		.230 (5.84)	.530	.025	.300		44.0
CFR09ARB154--	.15		.260 (6.60)	.530	.025	.460		41.0
CFR09ARB184--	.18		.260 (6.60)	.530	.025	.396		38.0
CFR09ARB224--	.22		.310 (7.87)	.530	.025	.484		35.0
CFR09ARB274--	.27		.310 (7.87)	.530	.025	.592		33.0
CFR09ARB334--	.33		.350 (8.89)	.530	.025	1.086		30.0
CFR09ARB394--	.39		.310 (7.87)	.750 (19.05)	.025	.544		28.0
CFR09ARB474--	.47		.310 (7.87)	.750	.025	.666		26.0
CFR09ARB564--	.56		.350 (8.89)	.750	.025	1.170		24.0
CFR09ARB684--	.68		.350 (8.89)	.750	.025	1.422		22.0
CFR09ARB824--	.82		.400 (10.16)	.750	.025	1.716		20.0
CFR09ARB105--	1.0		.400 (10.16)	.750	.025	1.770		18.5
CFR09ARB125--	1.2		.350 (8.89)	1.030 (26.16)	.025	1.314		17.0
CFR09ARB155--	1.5		.400 (10.16)	1.030	.025	1.818		15.0
CFR09ARB185--	1.8		.440 (11.18)	1.030	.032 (0.81)	2.184		13.5
CFR09ARB205--	2.0		.440 (11.18)	1.030	.032	2.430		12.5
CFR09ARB225--	2.2		.490 (12.45)	1.030	.032	2.670		12.0
CFR09ARB275--	2.7		.490 (12.45)	1.030	.032	2.964		10.5
CFR09ARB305--	3.0		.490 (12.45)	1.250 (31.75)	.032	2.562		10.0
CFR09ARB335--	3.3		.490 (12.45)	1.250	.032	2.820		9.5
CFR09ARB395--	3.9		.560 (14.22)	1.250	.032	3.330		8.5
CFR09ARB475--	4.7		.610 (15.49)	1.250	.032	4.000		7.5
CFR09ARB505--	5.0		.610 (15.49)	1.250	.032	4.000		7.0
CFR09ARB565--	5.6		.560 (14.22)	1.500 (38.10)	.032	3.684		6.5
CFR09ARB685--	6.8		.610 (15.49)	1.500	.032	4.000	51.0	6.0
CFR09ARB825--	8.2		.670 (17.02)	1.500	.032	4.000	48.0	5.5
CFR09ARB106--	10.0		.740 (18.80)	1.500	.032	4.000	46.0	4.0

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

150 VDC								
Type designation 1/	Capacitance (nom)	Capacitance tolerance available	Dimensions (in inches)			AC ratings (for sinusoidal operation from -55° to +105°C) 3/		
			D +.050 (1.27)	L +.050 (1.27)	M 2/	RMS current	RMS voltage 0-400 Hz	RMS voltage 4 kHz
	µF					Amperes	Volts	Volts
CFR09ARH153--	.015	F,G,J,K	.170 (4.32)	.400 (10.16)	.020 (0.51)	.108	79.0	79.0
CFR09ARH183--	.018		.190 (4.83)	.400	.020 (0.51)	.128		
CFR09ARH223--	.022		.230 (5.84)	.400	.025 (0.64)	.160		
CFR09ARH273--	.027		.230 (5.84)	.400	.025	.196		
CFR09ARH333--	.033		.230 (5.84)	.400	.025	.240		75.0
CFR09ARH393--	.039		.260 (6.60)	.400	.025	.284		71.0
CFR09ARH473--	.047		.260 (6.60)	.400	.025	.340		68.0
CFR09ARH563--	.056		.230 (5.84)	.530 (13.46)	.025	.176		65.0
CFR09ARH683--	.068		.230 (5.84)	.530	.025	.212		61.0
CFR09ARH823--	.082		.260 (6.60)	.530	.025	.252		58.0
CFR09ARH104--	.10		.260 (6.60)	.530	.025	.312		55.0
CFR09ARH124--	.12		.310 (7.87)	.530	.025	.372		51.0
CFR09ARH154--	.15		.350 (8.89)	.530	.025	.702		48.0
CFR09ARH184--	.18		.350 (8.89)	.530	.025	.840		45.0
CFR09ARH224--	.22		.310 (7.87)	.750 (19.05)	.025	.436		42.0
CFR09ARH274--	.27		.310 (7.87)	.750	.025	.536		39.0
CFR09ARH334--	.33		.350 (8.89)	.750	.025	.978		35.0
CFR09ARH394--	.39		.400 (10.16)	.750	.025	1.158		32.0
CFR09ARH474--	.47		.400 (10.16)	.750	.025	1.182		30.0
CFR09ARH564--	.56		.350 (8.89)	1.030 (26.16)	.025	.960		28.0
CFR09ARH684--	.68		.400 (10.16)	1.030	.025	1.170		26.0
CFR09ARH824--	.82		.400 (10.16)	1.030	.025	1.272		24.0
CFR09ARH105--	1.0		.440 (11.18)	1.030	.032 (0.81)	1.554		22.0
CFR09ARH125--	1.2		.490 (12.45)	1.030	.032	2.064		19.0
CFR09ARH155--	1.5		.490 (12.45)	1.250 (31.75)	.032	1.812		17.0
CFR09ARH185--	1.8		.560 (14.22)	1.250	.032	2.178		15.0
CFR09ARH205--	2.0		.560 (14.22)	1.250	.032	2.418		14.0
CFR09ARH225--	2.2		.560 (14.22)	1.250	.032	2.658		12.5
CFR09ARH275--	2.7		.610 (15.49)	1.250	.032	3.264		11.0
CFR09ARH305--	3.0		.610 (15.49)	1.500 (38.10)	.032	2.796		10.0
CFR09ARH335--	3.3		.610 (15.49)	1.500	.032	3.078		9.0
CFR09ARH395--	3.9		.670 (17.02)	1.500	.032	3.636	76.0	8.0
CFR09ARH475--	4.7		.740 (18.80)	1.500	.032	4.000	72.0	7.0
CFR09ARH505--	5.0		.740 (18.80)	1.500	.032	4.000	71.0	6.0

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 20260-22T23:29Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

200 VDC								
Type designation 1/	Capacitance (nom)	Capacitance tolerance available	Dimensions (in inches) D ±.050 (1.27)	Dimensions (in inches) L ±.050 (1.27)	Dimensions (in inches) M 2/	AC ratings (for sinusoidal operation from -55° to +105°C) 3/ RMS current	AC ratings RMS voltage 0-400 Hz	AC ratings RMS voltage 4 kHz
	µF					Amperes	Volts	Volts
CFR09ARC103--	.010	F,G,J,K	.170 (4.32)	.400 (10.16)	.020 (0.51)	.088	106.0	106.0
CFR09ARC123--	.012		.190 (4.83)	.400	.020 (0.51)	.104		103.0
CFR09ARC153--	.015		.190 (4.83)	.400	.020 (0.51)	.132		98.0
CFR09ARC183--	.018		.230 (5.84)	.400	.025 (0.64)	.156		93.0
CFR09ARC223--	.022		.230 (5.84)	.400	.025	.192		89.0
CFR09ARC273--	.027		.260 (6.60)	.400	.025	.232		84.0
CFR09ARC333--	.033		.260 (6.60	.400	.025	.288		79.0
CFR09ARC393--	.039		.230 (5.84)	.530 (13.46)	.025	.144		75.0
CFR09ARC473--	.047		.230 (5.84)	.530	.025	.176		71.0
CFR09ARC563--	.056		.260 (6.60)	.530	.025	.208		67.0
CFR09ARC683--	.068		.260 (6.60)	.530	.025	.252		63.0
CFR09ARC823--	.082		.310 (7.87)	.530	.025	.304		59.0
CFR09ARC104--	.10		.310 (7.87)	.530	.025	.372		55.0
CFR09ARC124--	.12		.350 (8.89)	.530	.025	.672		51.0
CFR09ARC154--	.15		.310 (7.87)	.750 (19.05)	.025	.356		47.0
CFR09ARC184--	.18		.310 (7.87)	.750	.025	.360		44.0
CFR09ARC224--	.22		.350 (8.89)	.750	.025	.786		40.0
CFR09ARC274--	.27		.350 (8.89)	.750	.025	.810		37.0
CFR09ARC334--	.33		.400 (10.16)	.750	.025	.993		33.0
CFR09ARC394--	.39		.350 (8.89)	1.030 (26.16)	.025	.804		30.0
CFR09ARC474--	.47		.400 (10.16)	1.030	.025	.996		28.0
CFR09ARC564--	.56		.400 (10.16)	1.030	.025	1.152		25.0
CFR09ARC684--	.68		.440 (11.18)	1.030	.032 (0.81)	1.404		23.0
CFR09ARC824--	.82		.490 (12.45)	1.030	.032	1.692		20.0
CFR09ARC105--	1.0		.490 (12.45)	1.250 (31.75)	.032	1.452		18.0
CFR09ARC125--	1.2		.490 (12.45)	1.250 (31.75)	.032	1.740		16.0
CFR09ARC155--	1.5		.560 (14.22)	1.250 (31.75)	.032	2.178	105.0	14.0
CFR09ARC185--	1.8		.560 (14.22)	1.500 (38.10)	.032	2.010	102.0	12.0
CFR09ARC205--	2.0		.560 (14.22)	1.500	.032	2.238	102.0	11.0
CFR09ARC225--	2.2		.610 (15.49)	1.500	.032	2.460	99.0	10.5
CFR09ARC275--	2.7		.670 (17.02)	1.500	.032	3.024	94.0	10.0
CFR09ARC305--	3.0		.670 (17.02)	1.500	.032	3.360	91.0	9.0
CFR09ARC335--	3.3		.740 (18.80)	1.500	.032	3.690	89.0	8.0
CFR09ARC395--	3.9		.740 (18.80)	1.500	.032	4.000	85.0	7.0

1/ The complete type designation will include additional symbols to indicate capacitance tolerance and failure rate level (M, P, R, or S).
2/ Tolerances on lead wire diameters are +.005, -.003 on .032 (No. 20 AWG) and .025 (No. 22 AWG) inch-diameters; and +.004, -.001 on .020 (No. 24 AWG).
3/ These ratings are maximum ac currents and ac voltages. Under no condition should either of these values be exceeded.

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T23:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:


Design and construction:
Dimensions and configuration: See figure 1 and table I.
Case: Nonhermetic.
Dielectric: Polycarbonate, metallized.
Leads: Solder-coated copper clad steel.
Capacitance (Cap.) value: See table I.
Cap. tolerance: See table I.
Rated voltage: See table I (ac and dc voltages).
Operating temperature range: -55° to +125°C for dc operation (with derating in accordance with table III of MIL-C-55514). -55° to +105°C for ac operation.
Failure rate (FR) level: M, P, R, and S.

Preconditioning: Not applicable.

Burn-in: In accordance with MIL-C-55514 except paragraph (b) shall be at +105° $^{+0°}_{-5°}$ C.

and the applied voltage shall be 120 percent of the rms voltage specified in table I.

Dielectric withstanding voltage (DWV): In accordance with MIL-C-55514 with the following exceptions:
Terminal to terminal:
AC: 100 ±10 Hz square wave, peak-to-peak voltage, two times dc rated voltage for 60 seconds.

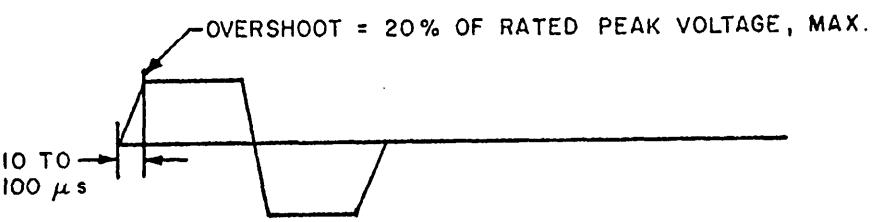

DC: 200 percent of dc rated voltage for 60 seconds, minimum.

Insulation resistance (IR): In accordance with MIL-C-55514, except charge time 5 minutes, maximum; however, for cap. values greater than 1.0 μF, an additional 1 minute per μF is permitted.
Terminal to terminal (dc rated voltage): See figure 2.

Capacitance: Within the specified tolerance. In accordance with MIL-C-55514 except that capacitors having a nominal capacitance of 1 μF or greater shall be measured at 100 ±10 Hz.

Dissipation factor (DF): 0.3 percent, maximum. In accordance with MIL-C-55514 except that capacitors having a nominal capacitance of 1 μF or greater shall be measured at 100 ±10 Hz.

Low temperature conditioning and capacitance change with temperature: In accordance with MIL-C-55514.

Resistance to soldering heat: Method 210 of MIL-STD-202, condition B.
ΔCap.: Maximum of ±0.25 percent.

Life (at +125°C): In accordance with MIL-C-55514, except:
Accelerated condition: 140 percent of +125°C derated voltage.
Rated condition: 100 percent of +85°C rated voltage.
DF (at+125°C): 0.5 percent, maximum:
IR (terminal to terminal) (at +25°C): Not less than 33.3 percent of initial requirement.
ΔCap.: Maximum of ±5.0 percent.
DF (at +25°C) after life: 0.6 percent, maximum.

Source: https://assist.dla.mil -- Downloaded: 202640-22T23:29Z
Check the source to verify that this is the currentversion before use.

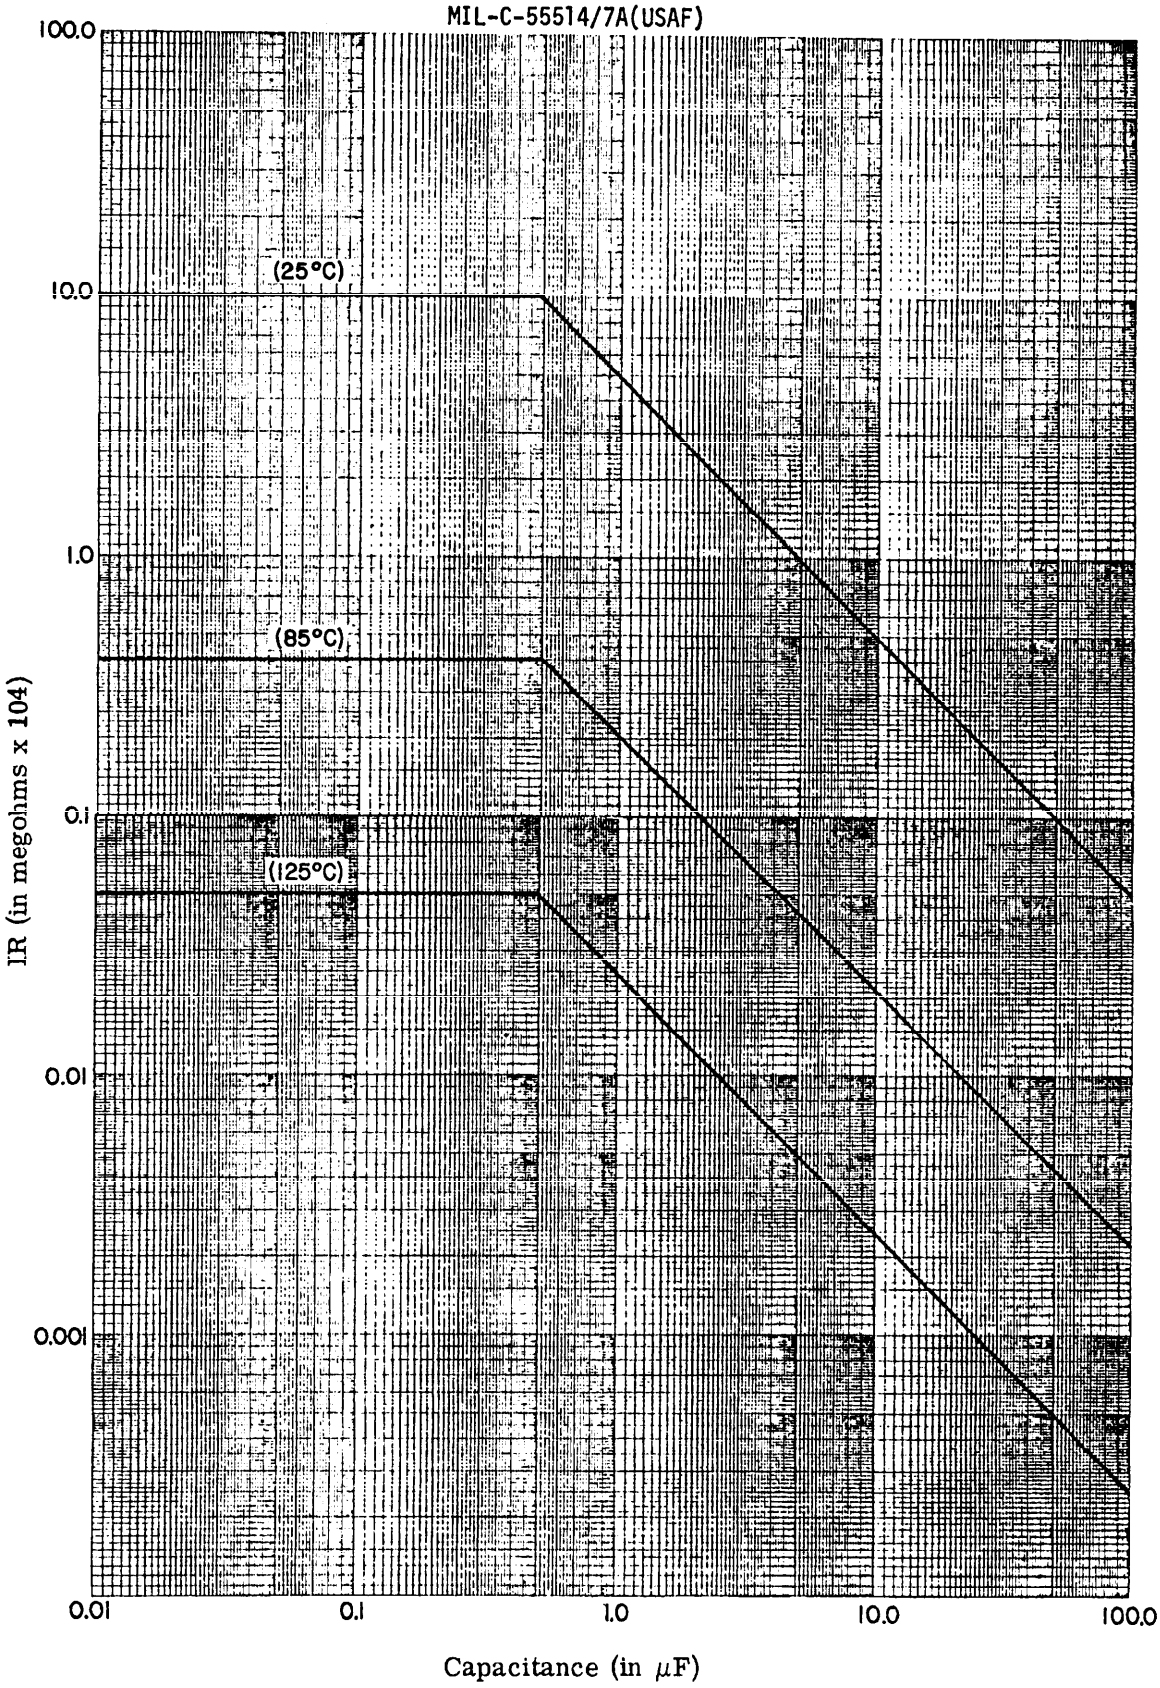


FIGURE 2. Insulation resistance vs. capacitance value.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the currentversion before use.

AC conditioning: Capacitors shall be exposed to the voltages and frequencies specified at +105°C +0, -5°C and in accordance with the values shown in table III.
Test samples shall be in accordance with table III.
Post test requirements:
DF (at +105°C): 0.5 percent, maximum.
IR (terminal to terminal) (at +25°C): Not less than 33.3 percent of initial requirement.
ΔCap.: Maximum of ±5.0 percent.
DF (at +25°C) after life: 0.6 percent, maximum.

TABLE III. AC conditioning test samples.

DC rated voltage (volts)	AC rating at .4 KHz (volts)	AC conditioning test voltage RMS	AC conditioning test voltage frequency	Total cap. value of sample (μF)	Cap. range for selection of sample 1/
50	25	30	400 Hz	40	.056 to 18.0 μF
75	39	46	400 Hz	40	.033 to 12.0 μF
100	53	63	400 Hz	20	.027 to 5.6 μF
150	79	94	400 Hz	40	.015 to 3.3 μF
200	106	127	400 Hz	20	.010 to 1.5 μF

1/ Each test sample shall contain at least one capacitor of the highest and lowest capacitance value of each voltage group manufactured during the three month period.

Marking: In accordance with MIL-C-55514.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5910-F350)

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the currentversion before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C 55514/7A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.

See footnotes at end of table.

FOLD

ASD/ENESS
Wright-Patterson AFB, O 45433

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-318

U.S.MAIL

ASD/ENESS
Wright-Patterson AFB, O 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-22T23:29Z
Check the source to verify that this is the current version before use.