MILITARY SPECFICATION

TEST SET, ELECTRONIC SYSTEMS: M91

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the performance and acceptance inspection requirements for the Test Set, Electronic Systems: M91 associated with the M-130 Aircraft General Purpose Dispenser.

2. APPLICABLE DOCUMENTS

2.1 The following documents of issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specfied herein.

SPECIFICATIONS

MILITARY

MIL-S-45743 - Soldering, Manual Type, High Reliability, Electronic Equipment
MIL-S-46844 - Solder Bath Soldering of Printed Wiring Assemblies, Automatic Machine Type
MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

FSC: 4925

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests For
MIL-STD-810 - Environmental Test Methods
MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components

DRAWINGS (see 6.5)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

PRODUCT AND PACKAGE DRAWINGS

9325900 - Test Set, Electronic Systems: M91
9327669 - Packing and Marking for Box Exterior for Test Set, Electronic Systems: M91

INSPECTION EQUIPMENT DRAWINGS

9311431 - Electronics Module
9311434 - Dispenser Assembly
9310953 - Counter, Two Drum

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

2.2 Other publications. - The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

CODE OF FEDERAL REGULATIONS

Title 49 - Transportation, Parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Officer, Washington, D.C. 20402. Orders should specify, "49 CFR 100-199 (latest revision)").

3. REQUIREMENTS

3.1 Materials. - Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. - The components and assemblies shall comply with all requirements specified on drawing 9325900 and associated drawings and with all requirements specified in applicable specifications and standards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

3.3 Performance. - The M91 Test Set shall perform as specified herein. See Functional Test, 4.4.3.1.

3.4 Environmental requirements. - The test methods in the following subparagraphs are contained in MIL-STD-810, except for temperature humidity which is contained in MIL-STD-331.

3.4.1 Transportation vibration. - The M91 Test Set shall perform all functions satisfactorily after being subjected to Method 514.2, Procedure X.

3.4.2 Helicopter vibration. - The M91 Test Set shall perform all functions satisfactorily after being subjected to Method 514.2, Procedure IIc.

3.4.3 Temperature humidity. - The M91 Test Set shall perform all functions satisfactorily after being subjected to Test 105.1 of MIL-STD-331. (Two fourteen day cycles shall be completed for a total test period of 28 days except -65°F shall be used in lieu of -80°F for storage temperature.)

3.5 Wiring and soldering. - Soldering of electrical wires, cables, connectors, components and assemblies shall be performed in a thorough, workmanlike manner in accordance with MIL-STD-1460, except that para. 4.1.3 does not apply.

3.6 First article inspection. - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be specified in the contract.

3.7 Workmanship. - All parts and assemblies shall be fabricated and finished in a thorough workmanlike manner, and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part or assembly nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat and sharply defined. Required packing shall be dry.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. - The following types of inspection shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission. - The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3. 2 and 4.3.3. The first article sample shall consist of the items in sample quantities as indicated in Table 1.

4.3.2 Inspections to be performed. - See MIL-A-48078 and paras 4.4.2.1 thru 4.4.2.14, testing per para. 4.4.3 and Table 1 specified herein.

4.3.3 Rejection. - See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

TABLE 1 - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
	Test Set, Electronic Systems: M91		9325900
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Examination for defects	2	100%	3.2	4.4.2.1 thru 4.4.2.16
	Transportation vibration	2	100%	3.4.1	4.4.3.3
	Helicopter vibration	2	100%	3.4.2	4.4.3.1
	Temperature-Humidity	2	100%	3.4.3	4.4.3.4
	Functioning	2	100%	3.3	4.4.3.1

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection

4.4.1 Inspection lot formation. - Inspection lots shall comply with the lot formation provisions of MIL-A-48078.

4.4.2 Examination. - (See MIL-A-48078). Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9326142
4.4.2.1	Printed Circuit Board Assembly (No. 1)				NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering missing or incorrect		0.40%	3.5	Visual
103	Insulation compound missing, improperly applied or covering surface "X" or "Y"		0.40%	3.2	Visual/Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Printed Circuit Board Assembly (No. 2)				9326143
					NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering missing or incorrect		0.40%	3.5	Visual
103	Insulation compound missing, improperly applied or covering surface "X" or "Y"		0.40%	3.2	Visual/Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Printed Circuit Board Assembly (No. 3)				9326144
					NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering missing or incorrect		0.40%	3.5	Visual
103	Insulation compound missing, improperly applied or covering surface "X" or "Y"		0.40%	3.2	Visual/Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Printed Circuit Board Assembly (No. 4)				9326145
					NEXT HIGHER ASSEMBLY
					9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering missing or incorrect		0.40%	3.5	Visual
103	Insulation compound missing, improperly applied or covering surface "X" or "Y"		0.40%	3.2	Visual/Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Interconnecting Board Assembly (No. 5)				9326142
					NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component missing, damaged or improperly assembled		0.40%	3.2	Visual
102	Soldering missing or incorrect		0.40%	3.5	Visual
103	Insulation compound missing, improperly applied or covering surface "X" or "Y"		0.40%	3.2	Visual/Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Cover		9326103
			NEXT HIGHER ASSEMBLY 9326182

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Inside height or width incorrect		0.40%	3.2	Gage
102	Outside depth incorrect		0.40%	3.2	Gage
103	Hole location, reset button (.609), incorrect		0.40%	3.2	Gage
Minor					
201	Protective finish missing or incorrect		0.65%	3.2	Visual
202	Marking missing or incorrect		0.65%	3.2	Visual
203	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9326048
4.4.2.7	Rod, Push				NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length incorrect		0.40%	3.2	Gage
102	Slot length incorrect		0.40%	3.2	Gage
103	Hole location incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.8	Chassis Assembly				9326157
					NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any part missing, damaged or improperly assembled		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Plate, Base				9324928
					NEXT HIGHER ASSEMBLY 9326182
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length or width incorrect		0.40%	3.2	Gage
102	Any hole location incorrect		0.40%	3.2	Gage
103	Hole size "Z" 2 places, incorrect		0.40%	3.2	Gage
Minor					
201	Protective finish in holes		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Stud Nut, Knurled				9325998
					NEXT HIGHER ASSEMBLY 9325999
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length "L" incorrect		0.40%	3.2	Gage
102	Hex size incorrect		0.40%	3.2	Gage
103	Pitch		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-W-50219A (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.7	Other components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Spec or Dwg. No. / Document Nomenclature				
	MIL-R-2423/6 - C402H — Rivet				
	MS16562-2 — Pin				
	The contractor or vendor shall supply a certificate that the materials used, conform to the drawing requirements				
Critical	None defined				
Major					
101	Dimensions improper		0.40%	3.2	Gage
Minor					
201	Protective finish inadequate (if applicable)		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.9	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.8	Carton, Packing, Prior to Sealing Bag		9226389
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Protector missing		0.40%	3.2	Visual
102	Spacer mjssjng		0.40%	3.2	Visual
103	Sleeve missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.9	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9226389
4.4.2.9	Bag, prior to Insertion into Packing Box				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Bag damaged (cuts, tears, holes)		0.40%	3.2	Visual
Minor 201	Evidence of poor workmanship		1.00%	3.9	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9226390
4.4.2.10	Packing Box, Prior to Sealing				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Contents improperly packed		0.40%	3.2	Visual
Minor 201	Evidence of poor workmanship		1.00%	3.9	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9325900
4.4.2.15	Test Set, Electronic Systems: M91				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any component (test set assembly, cable assembly, screwdriver) missing, improper or damaged		100%	3.2	Visual
102	Function test		100%	3.3	4.4.3.1
Minor					
201	Identification plate missing, illegible or improperly annotated		0.65%	3.2	Visual
202	Decals missing or improperly located		0.65%	3.2	Visual
203	Sealing compound missing or improperly applied		0.65%	3.2	Visual
204	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-83263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9327669
4.4.2.16	Packing Box (prior to sealing)				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Packing missing or inadequate (contents loose)		0.40%	5.2	Visual/ Manual
102	Carton or filler damp or wet		0.40%	5.2	Visual/Manual
103	Integrity of barrier bag destroyed by puncture or heat seal separation		0.40%	5.2	Visual
Minor					
201	Heat seal of barrier bag located so that subsequent seals cannot be applied		0.65%	5.2	Visual
202	Marking on barrier bag missing, incorrect or illegible		0.65%	5.3	Visual
203	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-T-63263(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.17	Packing and Marking for Box Exterior for Test Set, Electronics Systems: M91				9327669
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Box damaged to the extent that contents are exposed or liable to become exposed		0.40%	5.2	Visual
102	Box improperly sealed		0.40%	5.2	Visual
Minor					
201	Marking on box missing, incorrect or illegible		0.65%	5.3	Visual
202	Evidence of poor workmanship		1.00%	3.7	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Functioning. - Major Defect - Each M91 Test Set shall be subjected to this test. The test shall be performed as specified in 4.5.1 using equipment in accordance with 4.4.4. If any unit fails to comply with the applicable requirements, it shall be classified defective and removed from the lot.

4.4.3.2 Helicopter vibration. - Major Defect - Each M91 Test Set submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.2 using equipment in accordance with 4.4.4. If any unit fails to comply with the applicable requirements, the first article sample shall be rejected.

4.4.3.3 Transportation vibration. - Major Defect - Each M91 Test Set submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.3 using equipment in accordance with 4.4.4. If any unit fails to comply with the applicable requirements, the first article sample shall be rejected.

4.4.3.4 Temperature and humidity. - Major Defect - Each M91 Test Set submitted for first article testing shall be subjected to this test. The test shall be performed as specified in 4.5.4 using equipment in accordance with 4.4.4. If any unit fails to comply with the applicable requirements, the first article sample shall be rejected.

4.4.3.5 Improper soldering. - Major Defect - Each M91 Test Set shall be inspected for improper soldering in accordance with MIL-S-45743 or MIL-S-46844 as applicable. If any wiring or printed circuit board assembly fails to comply with the requirements, the unit shall be classified defective and removed from the lot.

4.4.4 Inspection equipment. - The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the "Paragraph Reference/ Inspection Method" column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and Section 6.3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

TABLE 2

Functional Test Equipment (See 4.4.4)

Dispenser Assembly	GFE	9311434
Electronics Module	GFE	9311431
28 VDC Power Supply	Contractor	Commercial
Test-Set Tester	Contractor	See Figure 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

TEST SET-UP FOR M91 TEST SET

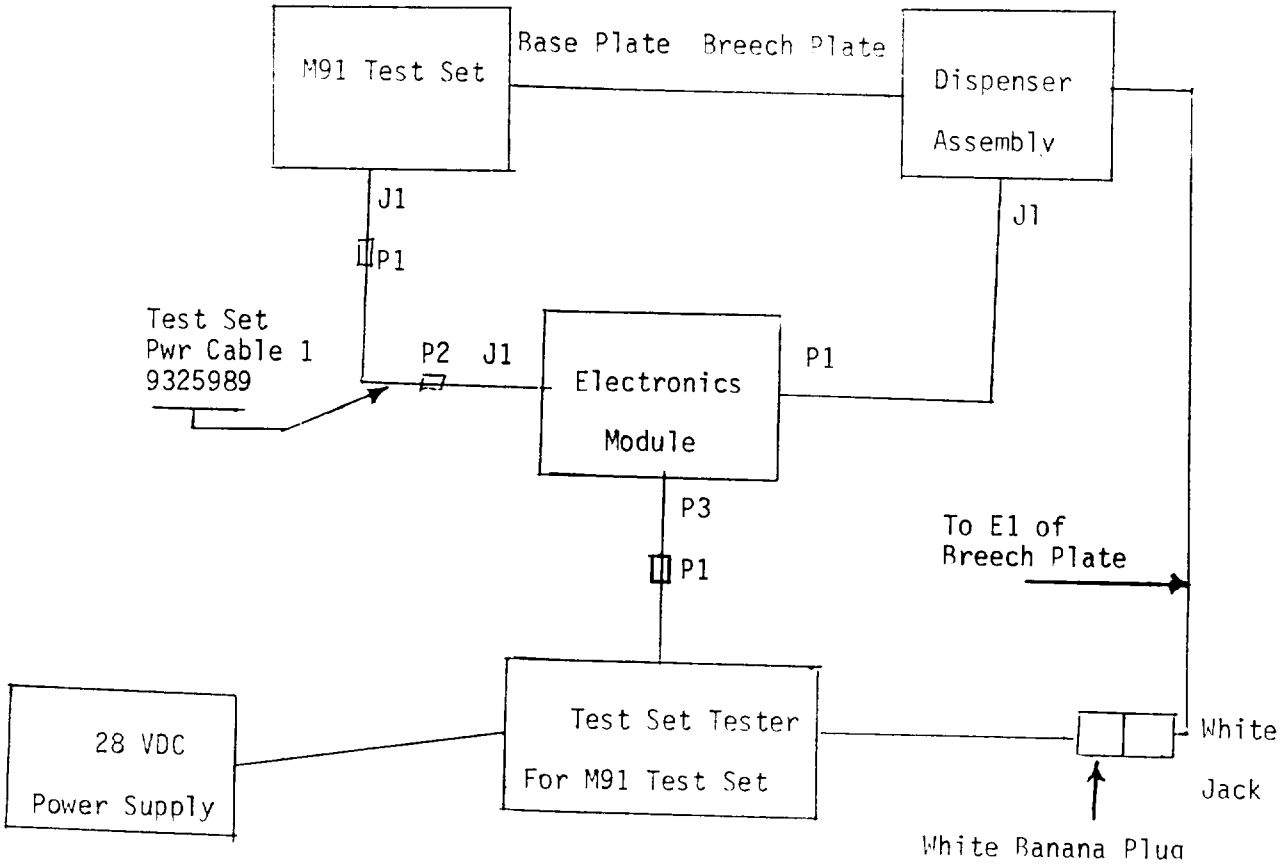


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

TEST SET TESTER
FOR M91 TEST SET

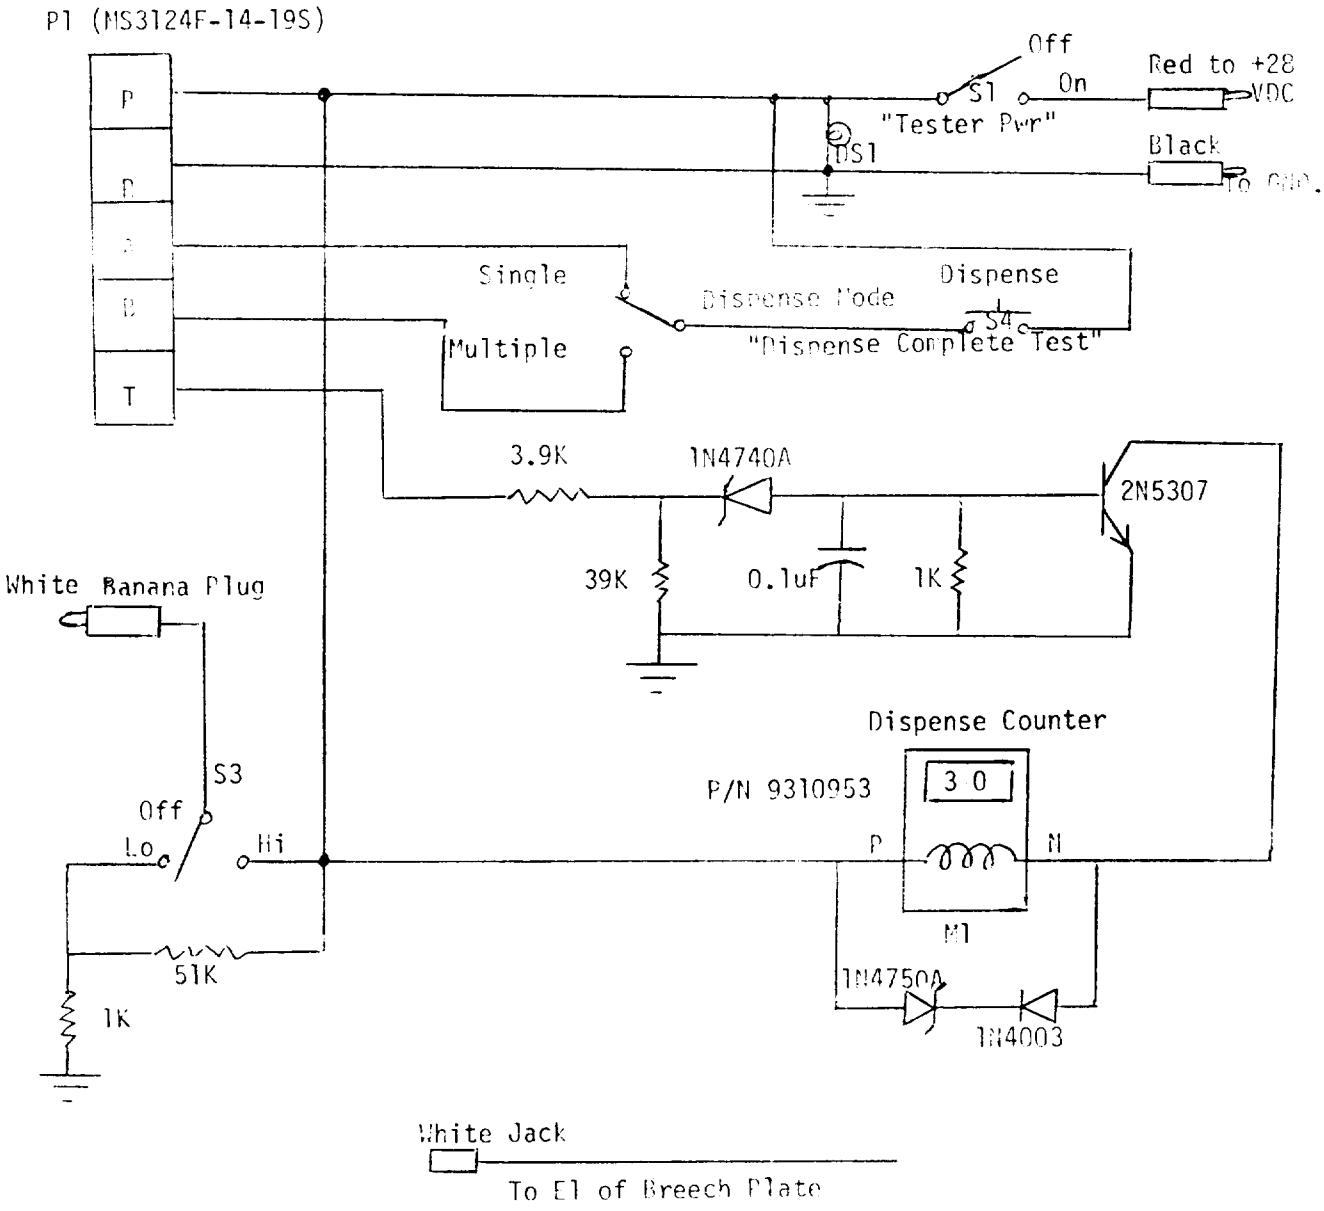


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

4.5 Test methods and procedures

4.5.1 Functioning. - Utilizing the test equipment in accordance with Table 2, the M91 Test Set shall be installed in a suitable test set up (see Figure 1) and subjected to the following procedure: (Note: The conttractor may submit an alternate proposal for test equipment and test procedures)

FUNCTIONAL TEST

M91 TEST SET

PRE-SETTING REQUIREMENT:

1. M91 Test Set.-The "test sequence" switch must be in the "START/HOME" position.

2. Dispenser Assembly.-The "C-F" select switch must be in the "C" position.

3. Test Set Tester.-The "Stray Voltage" switch must be in the "OFF" position.

4. Electronic Module.-Set the "CHAFF" program switches as follows:

Salvo: count = 8; interval = 1.
Burst: count = 3; interval = .1

OPERATION PROCEDURE:

1. On Test Set Tester, set power switch (S1) to "on" position, Lamp (DS1) lights. On M91 Test Set, "TS PWR ON" lamp lights and remains on throughout the test.

2. On M91 Test Set, perform the following sequence of tests:

a. Press-to-test each lamp (4); Each lamp should light.

b. Rotate "Test Sequence" switch to "TS RESET" position. No visual indication should occur.

c. Rotate "Test Sequence" switch to "S V SELF TEST" position. The "Stray Voltage" lamp should light.

d. Rotate "Test Sequence" switch (clockwise) to "T S Reset" position. "Stray Voltage" lamp should go out.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

e. Rotate "Test Sequence" switch to "STRAY VOLT" position "Stray Voltage" lamp should not light.

3. On Test Set Tester, set "Stray Voltage" switch (S3) to "Lo" position; "Stray Voltage" lamp on M91 Test Set should light: On Test Set Tester, reset "Stray Voltage" switch (S3) to "OFF" position.

4. On M91 Test Set, rotate (counter-clockwise) the "Test Sequence" switch to nearest "T.S. Reset" position; the "Stray Voltage" lamp should go off.

5. On M91 Test Set, rotate (clockwise) "Test Sequence" switch to "Stray Voltage" position.

6. On Test Set Tester set the "Stray Voltage" switch (S3) to "Hi" position; the "Stray Voltage" lamp on M91 Test Set should turn on. On Test Set Tester reset the "Stray Voltage" switch (S3) to "Off" position.

7. On M91 Test Set, perform the following sequence of tests:

a. Rotate (counter-clockwise) "Test Sequence" switch to nearest "T.S. Reset" position; the "Stray Voltage" lamp should go off.

b. Rotate (clockwise) "Test Sequence" switch to "Sys Not Reset" position; "System Not Reset" lamp should not light.

c. Rotate (clockwise) "Test Sequence" switch to "Disp Compl" position.

8. On Test Set Tester, perform the following sequence of tests:

a. Set "Dispense Mode" switch (S5) to "Single" position.

b. Press and release the "Dispense" switch (S4) six (6) times.

c. Set "Dispense Mode" switch (S4) to "Multiple" position.

d. Press and release the "Dispense" switch (S4) once; "Dispenser Counter" (M1) will continue to decrease counting until it reads "00" and the "Dispense Complete" lamp on the M91 Test Set should light.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

9. On M91 Test Set, perform the following sequence of tests:

a. Rotate (counter-clockwise) "Test Sequence" switch to "Sys Not Reset" position; the "Sys Not Reset" lamp should light.

b. Press and release the "Manual System Reset" switch; the "Sys Not Reset" lamp should go out.

c. Rotate (counter-clockwise) "Test Sequence" switch thru "Stray Volt" to "T.S. Reset" position; the "Dispense Complete" lamp should go out.

d. Rotate (counter-clockwise) "Test Sequence" switch to "START/HOME" position. (NOTE: While you are switching thru "SV Self Test" position, the "Stray Voltage" lamp (red) will light, then go off. When passing thru TS reset position. When the switch is returned to the "START/HOME" position, only the "T.S. Power On" lamp should remain on.

10. On Test Set Tester, set the "Power" switch (S1) to the "OFF" position. On M91 Test Set, the "T.S. PWR ON" lamp should go out.

4.5.2 Helicopter vibration. - Using equipment in accordance with 4.4.4, subject each first article unit to the vibration requirements of MIL-STD-810, Method 514.2, Procedure IIc to verify conformance to 3.4.1. Following this test examine each M91 Test Set for evidence of damage and submit each item to the procedure of 4.5.1. Any item which fails to comply to the applicable requiremetns shall be rejected.

4.5.3 Transportation vibration. - Using equipment in accordance with 4.4.4. subject each first article unit to the vibration requirements of MIL-STD-810C, Method 514.2, Procedure X to verify conformance to 3.4.2. Following this test, inspect each M91 Test Set for evidence of damage and submit each item the procedure of 4.5.1. Any item which fails to comply to the applicable requirements shall be rejected.

4.5.4 Temperature and humidity. - Using equipment in accordance with 4.4.4, subject each first article unit to test 105 of MIL-STD-331 to verify conformance to 3.4.3. Following this 28 day test, lower the chamber temperature to 130°F minimum and allow to stabilize for a minimum of 4 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

Subject each M91 Test Set to the functioning test, 4.4.3.1, at 130°F. If the test cannot be conducted in the chamber, the test shall be completed within 30 minutes maximum after removal from the chamber. Following this test, place the units in a chamber at -40°F for a minimum of 4 hours and repeat the functioning test. Any item which fails to meet applicable requirements shall cause the first article sample to be rejected.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging

5.2 Packing. - Packing shall be in accordance with 9327669.

5.3 Marking. - Marking shall be in accordance with 9327669.

6. NOTES

6.1 Intended use. - This item is used to test the Aircraft General Purpose Dispenser, M-130.

6.2 Ordering data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.3 Submission of inspection equipment designs for approval. (See MIL-A-48078). Submit equipment designs as required, to Commander: U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAA-I, Dover, New Jersey 07801.

6.4 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, U.S. Army Armament Research and Development Command, ATTN: DRDAR-QAA-Q, Dover, New Jersey 07801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

6.5 Drawings. - Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

Custodian:
Army-AR

Preparing Activity:
Army-AR

Project Number: 4925-A-031

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-63263 TEST SET, ELECTRONICS SYSTEMS: M91

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426
1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Armament R&D Command
ATTN: DRDAR-QAA
Dover, New Jersey 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:30Z
Check the source to verify that this is the current version before use.