NOT MEASUREMENT SENSITIVE


MIL-D-3943/146
17 May 1993

MILITARY SPECIFICATION SHEET

DECORATION, DISTINGUISHED SERVICE MEDAL, DEPARTMENT OF TRANSPORTATION

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-D-3943.

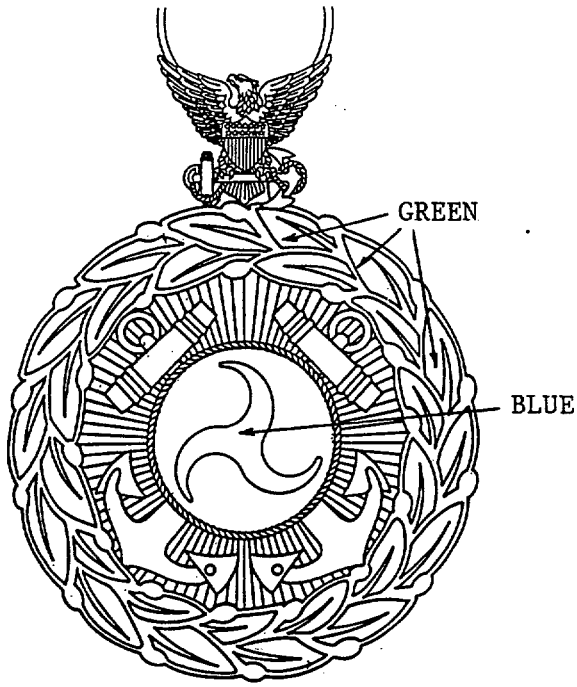

OBVERSE



REVERSE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Gilding Metal

FINISH:
BASE: Enameled, Gold Plated, Matte Finish, Polished Highlights and shall match TIOH Metal Finish Chip Number 8.
DEVICE: Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-17T01:05Z
Check the source to verify that this is the current version before use.

DIMENSIONS:

DIAMETER:

-1: 1-7/16 inches (3.65 cm) (REF)

-2: 3/4 inch (1.91 cm) (REF)

HEIGHT (To Wing Tip):

-1: 1-13/16 inches (4.60 cm) (REF)

-2: 7/8 inch (2.22 cm) (REF)

THICKNESS:

BASE:

-1: 0.090 inch ± 0.010 inch (0.229 cm ± 0.025 cm)

-2: 0.065 inch ± 0.010 inch (0.165 cm ± 0.025 cm)

DEVICE:

-1: 0.045 inch ± 0.010 inch (0.114 cm ± 0.025 cm)

-2: 0.040 inch ± 0.010 inch (0.102 cm ± 0.025 cm)

THICKNESS (Overall at Thickest Point):

-1: 0.135 inch ± 0.010 inch (0.343 cm ± 0.025 cm)

-2: 0.100 inch ± 0.010 inch (0.254 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled areas shall be as indicated. The color shall conform to the TIOH chip numbers listed below or the standard sample.

COLOR	CHIP NUMBER
Green (Wreath)	12
Blue (Device)	18

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of manufacturer. Epoxy resin shall be smooth and flush with the dikes. Epoxy resin shall be a stoning epoxy, have a shore D hardness of 85, and incorporate an ultraviolet inhibitor.

4. The suspension device is part of the base. The reverse side of the suspension device shall be flat.

5. The reverse of the medal shall be suitable for engraving.

6. Lettering and inscription bar on the reverse shall be raised.

7. Decoration set shall consist of a regular size medal, miniature size medal, ribbon bar and a lapel button all packaged in a presentation case conforming to MIL-C-14633, Type VII, Style 6 with a Class 1 or 1a pad.

8. The ribbon for the pendant drape shall conform to MIL-R-11589/372.

9. The lapel button shall conform to MIL-L-11484/192.

Custodian:
Army - IH

Review activities:
DLA - CT

User activities:
Other - DOT

Preparing activities:
Army - IH
(Project No. 8455-0714)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:05Z
Check the source to verify that this is the current version before use.