NOT MEASUREMENT SENSITIVE

MIL-DTL-3943/146H(IH)
14 March 2024
SUPERSEDING
MIL-DTL-3943/146G(IH)
13 May 2019

DETAIL SPECIFICATION SHEET


DECORATION, DISTINGUISHED SERVICE MEDAL, DEPARTMENT OF HOMELAND SECURITY

This specification is approved for use by all
Departments and Agencies of the Department of Defense


The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-3943.



OBVERSE

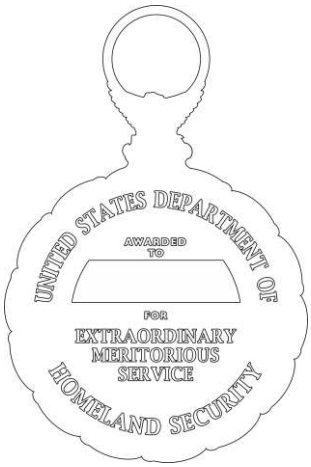

REVERSE



DEVICE

DASH NO.
-1: Regular Size
-2: Miniature Size

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin, 24K Gold Plated, Matte Finish, Polished Highlights and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 8.
DEVICE: Epoxy resin, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:04Z
Check the source to verify that this is the current version before use.

DIMENSIONS:
DIAMETER:
-1: 1-7/16 inches (REF)
-2: 3/4 inch (REF)
HEIGHT (To Wing Tip):
-1: 1-13/16 inches (REF)
-2: 1 inch (REF)
DEVICE:
HEIGHT:
-1. 9/16 inch (REF)
-2. 9/32 inch (REF)
WIDTH:
-1. 17/32 inch (REF)
-2. 9/32 inch (REF)
THICKNESS:
BASE:
-1: 0.112 inch ± 0.010 inch
-2: 0.088 inch ± 0.010 inch
DEVICE:
-1: 0.075 inch ± 0.010 inch
-2: 0.056 inch ± 0.010 inch
THICKNESS (Overall at thickest point):
-1: 0.195 inch ± 0.010 inch
-2: 0.153 inch ± 0.010 inch

DECORATION SET: Decoration set shall consist of a regular size medal, miniature size medal, service ribbon, and a lapel button all packaged in a presentation case conforming to MIL-DTL-14633, Type II, with a Class 2 pad.

ATTACHING DEVICE: The device shall be glued or swaged to the base using two screw posts that are soldered to the device.

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The suspension device is part of the base. The reverse side of the suspension device shall be flat.

3. The inscription bar on the reverse of the medal shall be suitable for engraving.

4. The specification slash sheet for the ribbon for the pendant drape is MIL-DTL-11589/372.

5. The specification slash sheet for the lapel button is MIL-DTL-11484/192.

6. When hard enamel is used, the material requirement shall be Gilding Metal 95/5 (UNS Alloy C-210).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:04Z
Check the source to verify that this is the current version before use.

EPOXY: Epoxy resin shall be applied to the Decoration as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR AND CHIP NUMBER	**LOCATIONS**
Green #12	Wreath, Bottom Corner of Shield
Blue #18	Behind Stars and 2nd and 4th Waves
Blue #33	Behind Mountain and 1st and 3rd Waves

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2024-084)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T01:04Z
Check the source to verify that this is the current version before use.