MIL-B-52251B(ME)
2 September 1980
SUPERSEDING
MIL-B-52251A(ME)
11 October 1972

MILITARY SPECIFICATION

BRACKET, SLING ATTACHMENT: FOR BEAMS AND GIRDERS OF LINE OF COMMUNICATION BRIDGES

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a lifting bracket to be bolted to the beams or girders used in the construction of the line of communication bridges.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

FEDERAL

FED-STD-595	- Colors.

FSC 5420

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

A108 - Cold-Finished Carbon Steel Bars and Shafting.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Description. The sling bracket shall be as shown in figure 1 and as specified herein.

3.2 First article (preproduction model). The contractor shall furnish one sling bracket for examination within the time frame specified (see 6.2), to prove, prior to starting production, that his production methods will produce sling brackets that comply with the requirements of this specification. Examination shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.14).

3.3.1 Steel. Steel shall be flat bar steel conforming to ASTM A108, grade designation 1035.

3.4 Identification marking. The sling bracket shall be metal-die stamped as shown on the figure. Die stamping shall be legible after painting.

3.5 Treatment and painting. The sling bracket shall be cleaned, treated, and painted in accordance with MIL-T-704, type A except that the color number designation shall be 24087 or 34087 in accordance with FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

3.6 Workmanship.

3.6.1 Metal Fabrication. Metal used in fabrication shall be free from scale, fins, prosity, cracks, sharp bends and kinks. The straightening of material shall be done by methods that will not cause injury to the material. Flame cutting, using tips suitable for the thickness of the steel, may be employed instead of shearing and sawing. All bends shall be made with controlled means to insure uniformity of size and shape. The corners and edges shall be rounded to provide a 1/16-inch minimum radius to permit safe handling by personnel. All burrs and projections shall be removed from holes and edges.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards.

4.2 Classification of inspection. Inspection shall be classified as follows:

(a) Preproduction inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 Preproduction inspection.

4.3.1 Examination. The preproduction sling bracket shall be examined for the defects specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the major and minor defects specified in 4.5.1. AQL shall be 2.5 percent defective for major defects and 4.0 percent defective for minor defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

4.5 Inspection procedure.

4.5.1 Examination. The sling bracket shall be examined as specified herein for the following defects:

Major:

101. Nonconformance to the dimensions shown on the figure.
102. Material not as specified.
103. Workmanship not as specified.

Minor:

201. Identification marking incorrect, missing, or illegible.
202. Treatment and painting not as specified.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.3 Examination. Samples selected in accordance with 4.6.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

104. Containers not as specified for level A or B. Each incorrect container shall be considered one defect.
105. Quantities packed together exceed the limitations specified for level A or B.
106. Strapping not zinc coated for level A.
107. Marking missing, illegible, incorrect, or incomplete.

5. PACKAGING

5.1 Packing. Packing shall be level A, level B, or commercial, as specified (see 6.2).

5.1.1 Level A. The sling brackets shall be packed together in a close fitting box conforming to PPP-B-601, overseas type, style optional, grade B, in quantities not to exceed 200 pounds. Box closure and strapping shall be in accordance with the appendix to the box specification. Strapping shall be zinc coated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

5.1.2 Level B. The sling brackets shall be packed together as specified in 5.1.1 except the box shall be domestic type and strapping shall not be required to be zinc coated. As an alternate the sling brackets may be packed together in a close fitting box conforming to PPP-B-636, V3c, style optional. The gross weight or size of the box shall not exceed the limitations of the box specification. Box closure and strapping shall be in accordance with the appendix to the box specification.

5.1.3 Commercial. Commercial packing shall be in accordance with MIL-STD-1188.

5.2 Marking. Marking for military levels of protection shall be in accordance with MIL-STD-129. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The sling attachment bracket is intended for use as a means of engaging sling hooks for lifting beams and girders.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of preproduction model (see 3.2).
(c) Degree of packing required (see 5.1).

6.3 Preproduction model. Any changes or deviations of production sling brackets from the approved preproduction model during production will be subject to the approval of the contracting officer. Approval of the preproduction model will not relieve the contractor of his obligation to furnish sling brackets conforming to this specification.


6.4 Recycled Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

Custodian:
Army - ME

Preparing activity:
Army - ME

Project No. 5420-A313

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

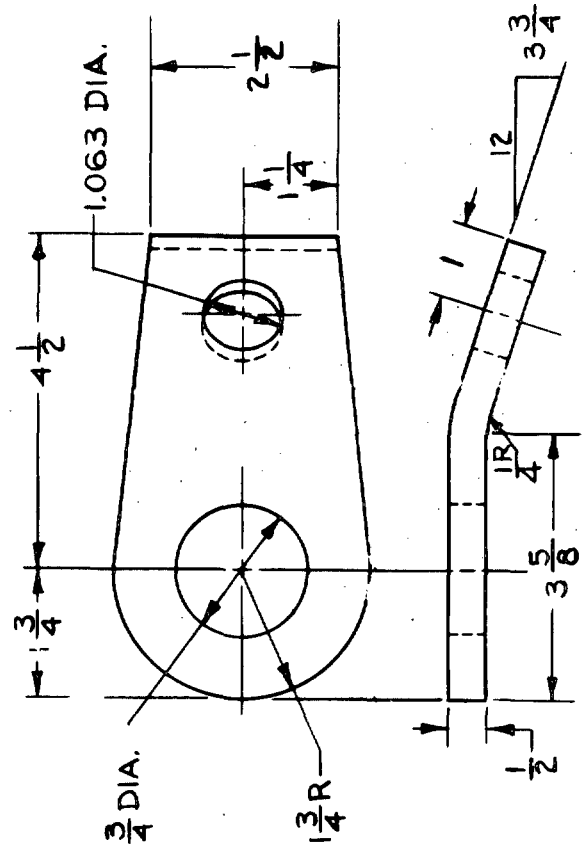

NOTES:
1. DIMENSIONS ARE IN INCHES, TOLERACES ±1/32.
2. METAL STAMP WITH 1/8" HIGH CHARACTERS:
5420-764-5643
BRACKET
CONTR. NO
MFR. IDENT. U.S

FIGURE 1. SLING ATTACHMENT BRACKET FOR BEAM AND GIRDER BRIDGES

X-2352

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-B-52251B(ME) Bracket, Sling Attachment: For Beams and Girders of Line of Communication Bridges

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:11Z
Check the source to verify that this is the current version before use.