# MILITARY SPECIFICATION SHEET

## CIRCUIT CARD ASSEMBLY, 9290227
## (INPUT BUFFER "A")

This specification is approved for use by the US Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the circuit card assembly described herein shall consist of this document and the latest issue of specification MIL-C-63371(AR).

Electrical Requirements

1. All input frequencies and pulse widths shall be within plus or minus five percent (± 5.0%) of the values indicated herein, unless otherwise specified.

2. All input and output levels shall be consistent with IC operating levels and power supply regulation but shall not exceed plus or minus one percent (± 1.0%) of the indicated nominal values, unless otherwise specified.

FSC 1095



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

## BOARD POWER

NOTE: Maintain the following throughout all tests.

| Pin No. | Voltage |
|---|---|
| 2 | 14 |
| 37 | 14 |
| 35 | 0 |
| 70 | 0 |

## MCS FAIL LEFT

NOTE: Connect a 120 ohm, 5 watt resistor between pin 49 and +24 volts.

### Test 1A

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 42 | 28 | 62 | 14 |
| 44 | 14 | 49 | 0 |
| 67 | 0 | 40 | 14 |
| 43 | 0 | | |

### Test 1B

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 42 | 28 | 62 | 0 |
| 44 | 14 | 49 | 0 |
| 67 | 28 | 40 | 0 |
| 43 | 14 | | |

### Test 1C

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 42 | 28 | 62 | 0 |
| 44 | 14 | 49 | 0 |
| 67 | 28 | 40 | 0 |
| 43 | 0 | | |



Source: https://assist.dla.mil -- Downloaded: 20261-23T02:43Z
Check the source to verify that this is the current version before use.

Test 1D

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 42 | 28 | | |
| 44 | 14 | 62 | 0 |
| 67 | 0 | 49 | 0 |
| 43 | 14 | 40 | 0 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

## MCS FAIL RIGHT

### Test 2A

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 67 | 28 | 41 | 14 |
| 43 | 14 | 49 | 0 |
| 42 | 0 | 40 | 14 |
| 44 | 0 | | |

### Test 2B

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 67 | 28 | 41 | 0 |
| 43 | 14 | 49 | 0 |
| 42 | 28 | 40 | 0 |
| 44 | 14 | | |

### Test 2C

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 67 | 28 | 41 | 0 |
| 43 | 14 | 49 | 0 |
| 42 | 28 | 40 | 0 |
| 44 | 0 | | |

### Test 2D

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 67 | 28 | 41 | 0 |
| 43 | 14 | 49 | 0 |
| 42 | 0 | 40 | 0 |
| 44 | 14 | | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

## ENGINE TACHOMETERS A & B

NOTE: Connect a 160 ohm, 2 watt resistor between pin 39 and +14 volts. (B)

### Test 3A

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 33 | 0 | 46 | 14 |
| 66 | 0 | 39 | 0 |
| 50 | Fig 1 | | |
| 47 | Fig 1 | | |

### Test 3B

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 33 | 0 | 46 | Fig 3 |
| 66 | 0 | 39 | Fig 3 |
| 50 | Fig 2 | | |
| 47 | Fig 2 | | |

### Test 3C

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 33 | 14 | 46 | 14 |
| 66 | 67 Hz, 14V Sq. Wave | 39 | 0 |

(B) denotes change



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

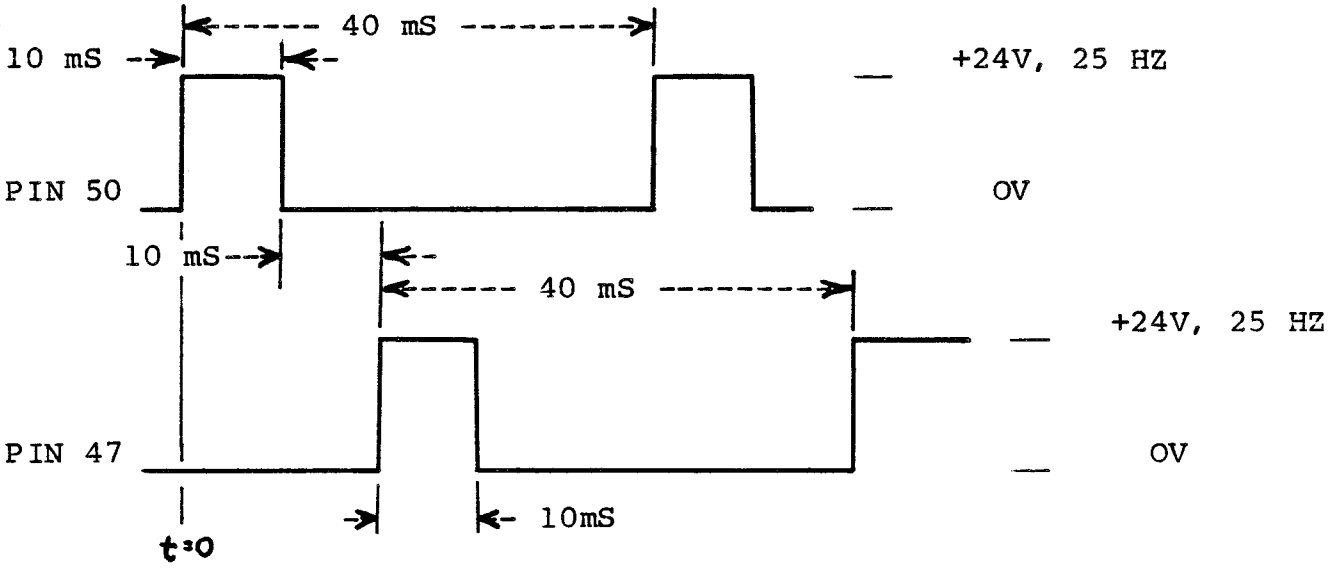



FIGURE 1. ENGINE TACHOMETER

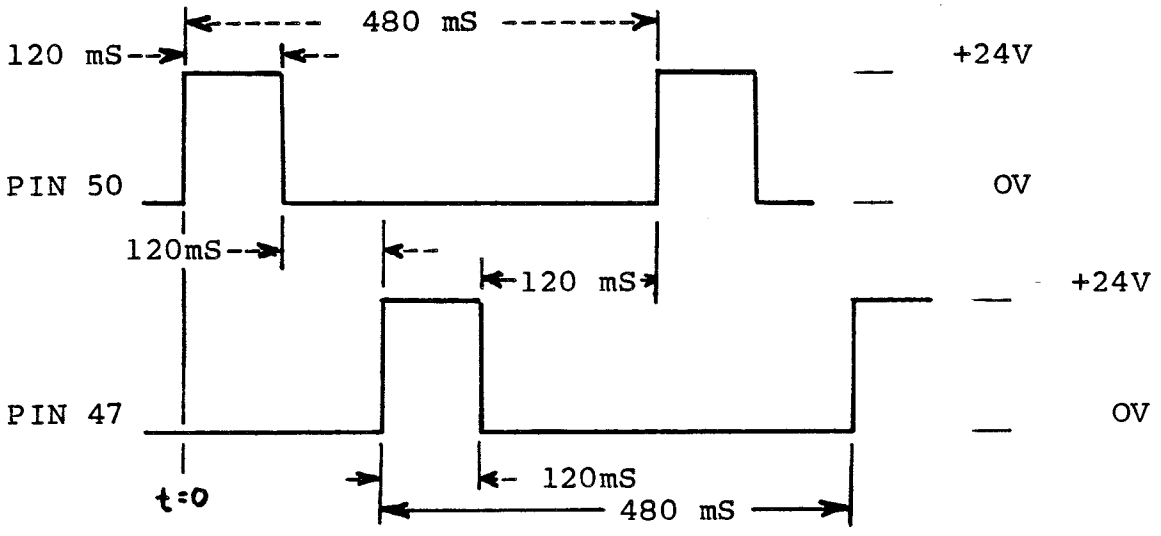



FIGURE 2. ENGINE TACHOMETER

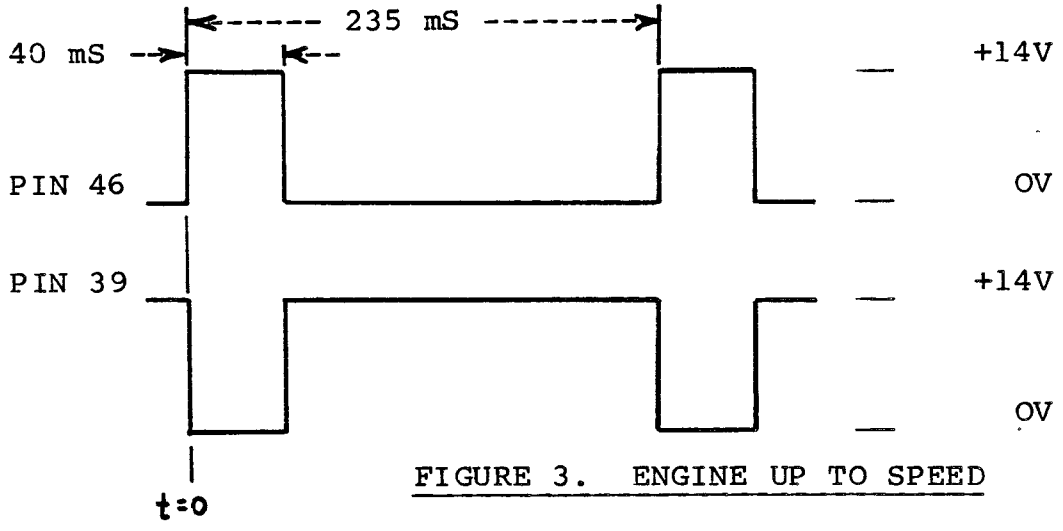



FIGURE 3. ENGINE UP TO SPEED



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

## LAUNCHER SPEED ENABLE

### Test 4A

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 33 | 0 | | |
| 63 | 0 | | |
| 65 | 500 Hz, 14V Sq. Wave | 68 | 13.461 |
| 65 | 250 Hz, 14V Sq. Wave | 68 | 1.85 |

### Test 4B

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 33 | 14 | | |
| 63 | 500 Hz, 14V Sq. Wave | 68 | 13.462 |
| 63 | 250 Hz, 14V Sq. Wave | 68 | 1.85 |

### Test 4C

| INPUT | | OUTPUT | |
|---|---|---|---|
| Pin No. | Voltage | Pin No. | Voltage |
| 33 | 0 | | |
| 65 | 345 Hz, 14V Sq. Wave | 68 | 13.457 |
| 65 | 260 Hz, 14V Sq. Wave | 68 | 1.85 |

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1095-A124/1)



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-C-63371/1B (AR) | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: _____ |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

*(TO DETACH THIS FORM, CUT ALONG THIS LINE.)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.