INCH-POUND


MIL-C-55302/156D
7 June 1993
SUPERSEDING
MIL-C-55302/156C
31 October 1988

MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, RIGHT ANGLE, DECADE INCREMENTS 10 THROUGH 120, 150, 160, AND 180 CONTACT POSITIONS FOR PRINTED WIRING BOARDS (.075 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation. MIL-C-55302

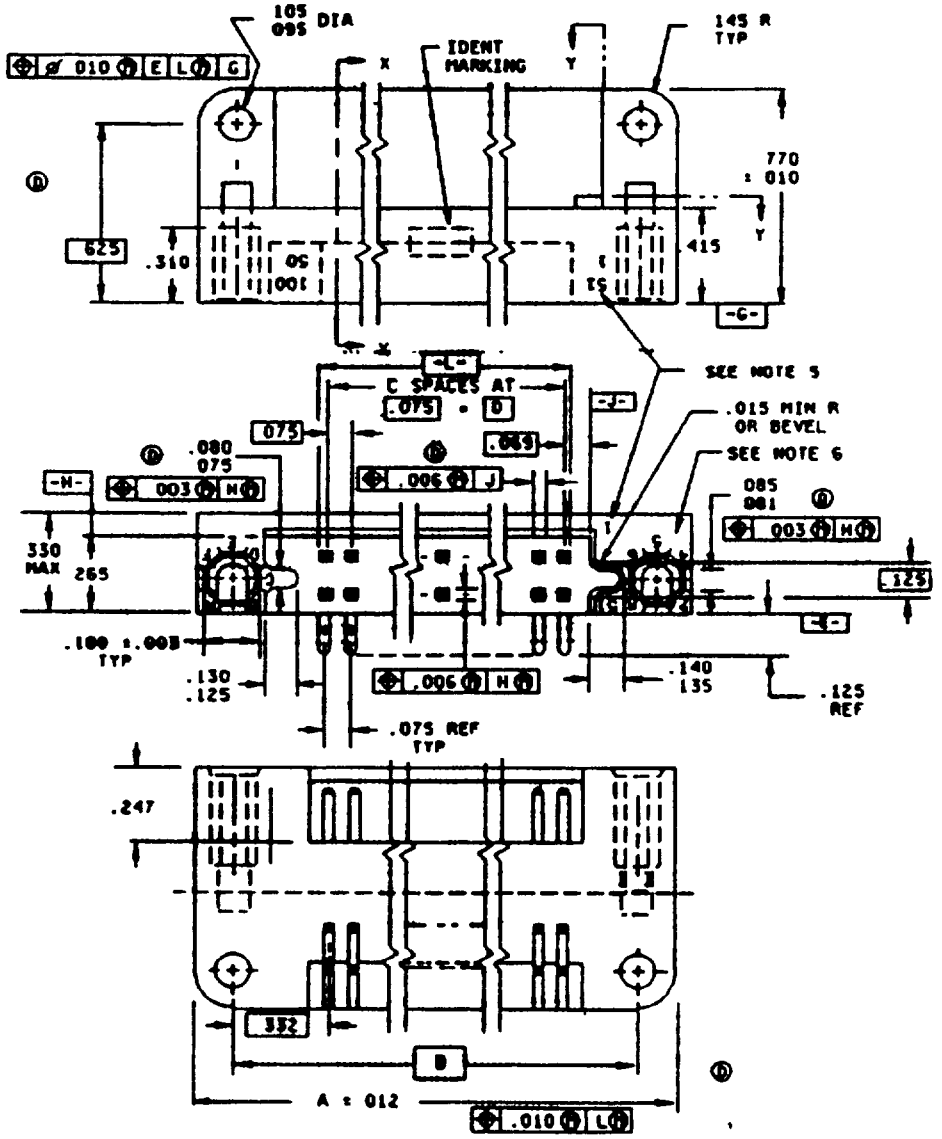

(D) FIGURE 1 Connector plug, type I, 075 (1.90 mm) spacing

(D) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited
Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.



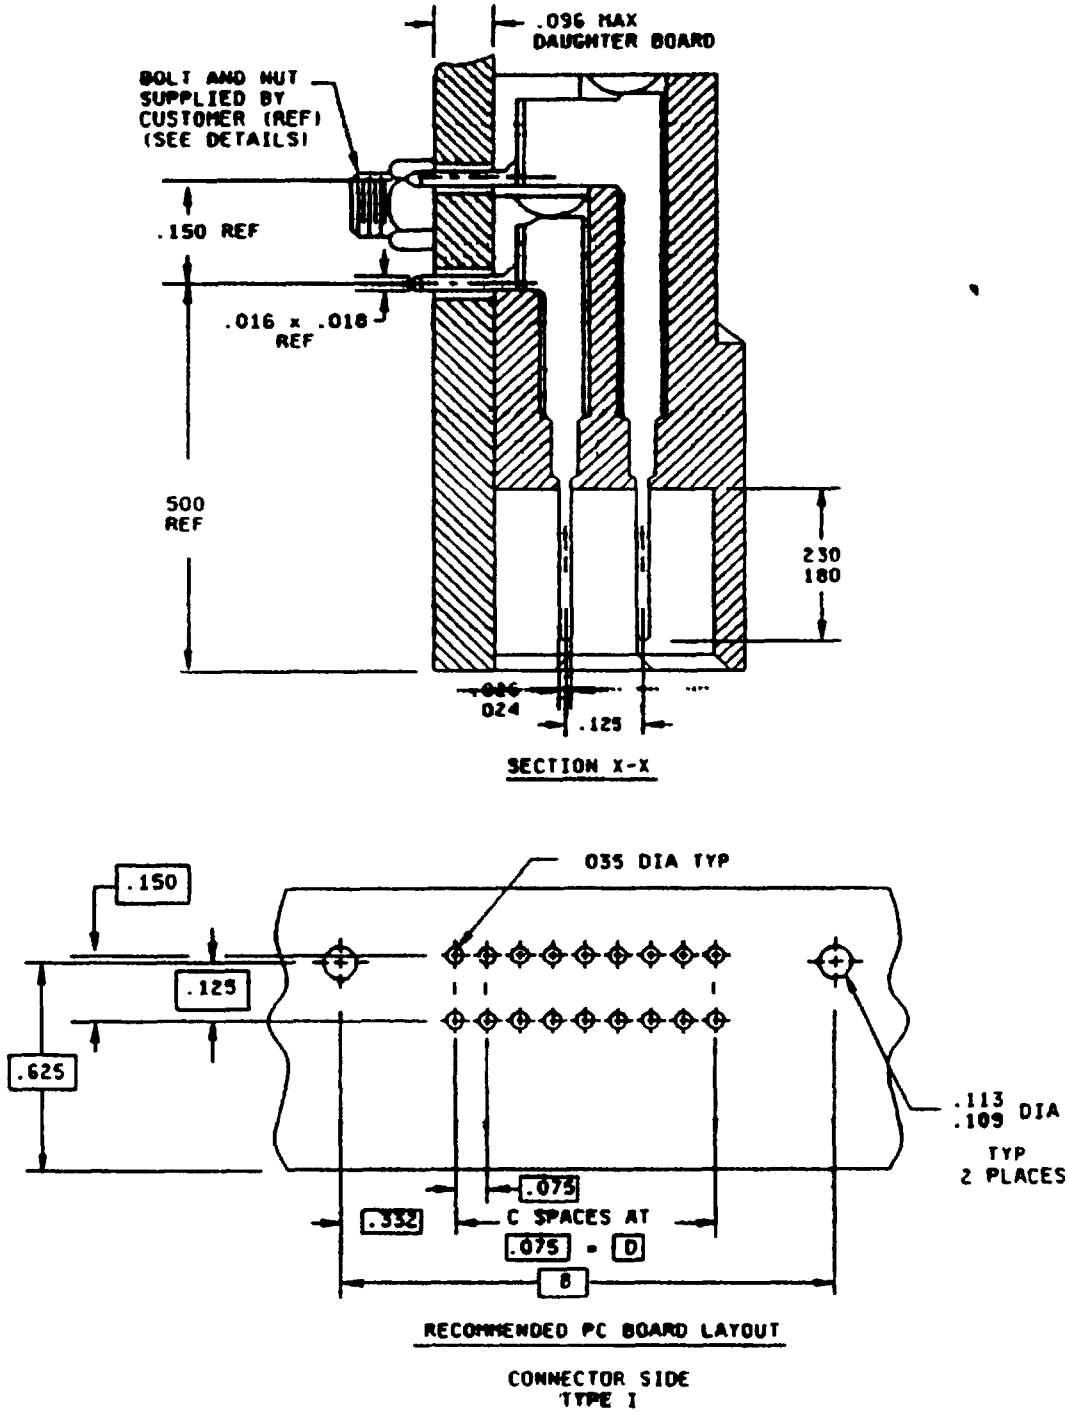



FIGURE 1 Connector plug, type I, 075 (1 90 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

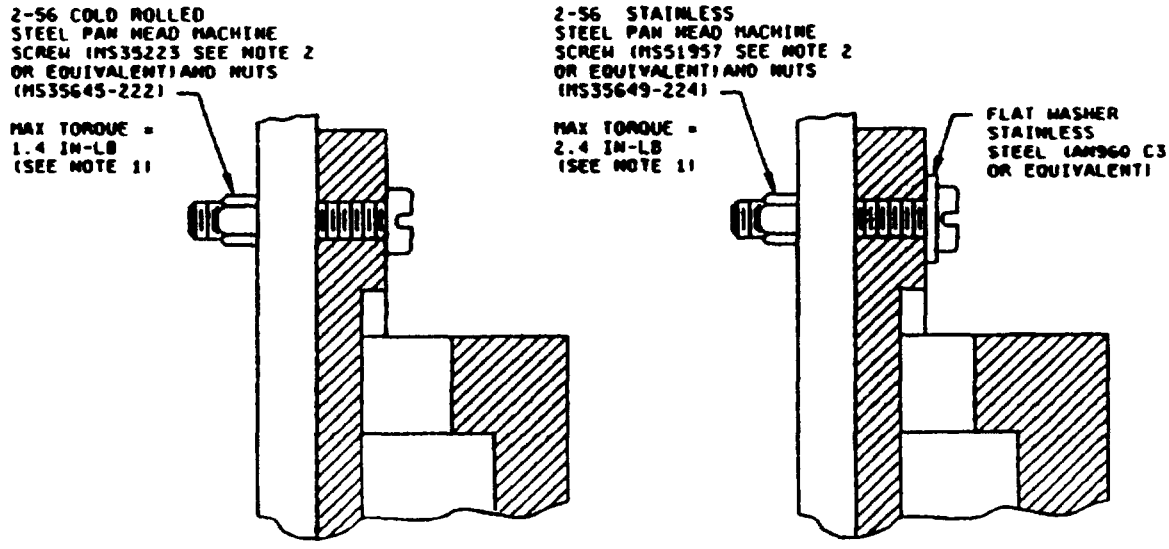

MOUNTING RECOMMENDATIONS

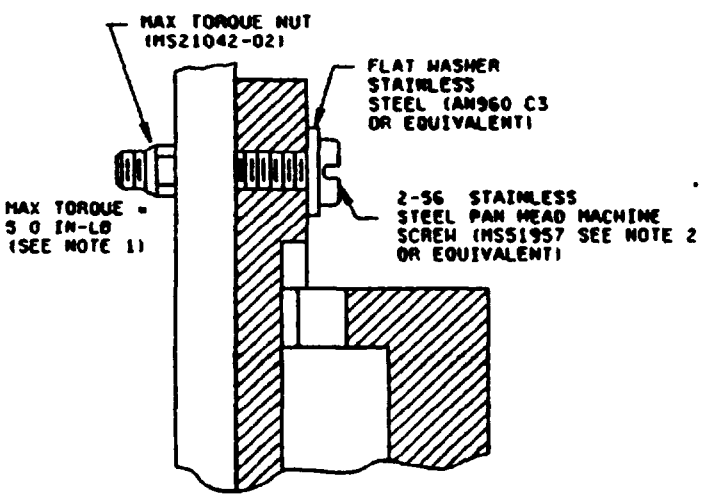

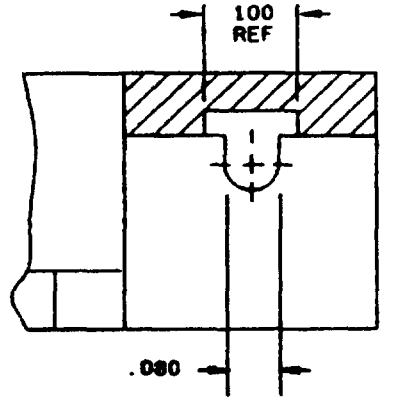

KEYING RIVET HOLE CONFIGURATION

SECTION Y-Y

NOTES
1. Torque wrench must be used when fastening connector to printed circuit board
2 Length to be determined by user

FIGURE 1 Connector plug, type I, 075 (1 90 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	080	2 03	.150	3.81
.005	0.13	.081	2 06	.180	4.57
.006	0.15	.085	2 16	.230	5.84
008	0.20	095	2.41	.247	6.27
.010	0.25	.096	2 44	.265	6 73
012	0 30	100	2 54	310	7 87
.015	0.38	105	2 67	.330	8.38
.016	0 41	109	2.77	332	8 43
.018	0 46	113	2.87	377	9 58
024	0 61	125	3.18	.415	10 54
026	0 66	130	3 30	500	12 70
035	0 89	135	3 43	625	15 88
.069	1.75	.140	3.56	770	19.56
075	1 91	145	3.68		

NOTES
1. Dimensions are in inches.
2. Metric equivalent are given for formation only.
3. Unless otherwise specified, tolerance is ±.005 (0 13 mm) on decimals and ±2° on angles
4. These connectors mate with connectors specified in MIL-C-55302/24 and MIL-C-55302/25.
(D) 5 .Numbers indicating every 5 cavities marked or molded on side. Numbers indicating end cavities and line indicating every 5 cavities marked or molded on mating face
6 Key locations embossed on indicated surfaces

FIGURE 1 Connector plug, type I, 075 (1 90 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

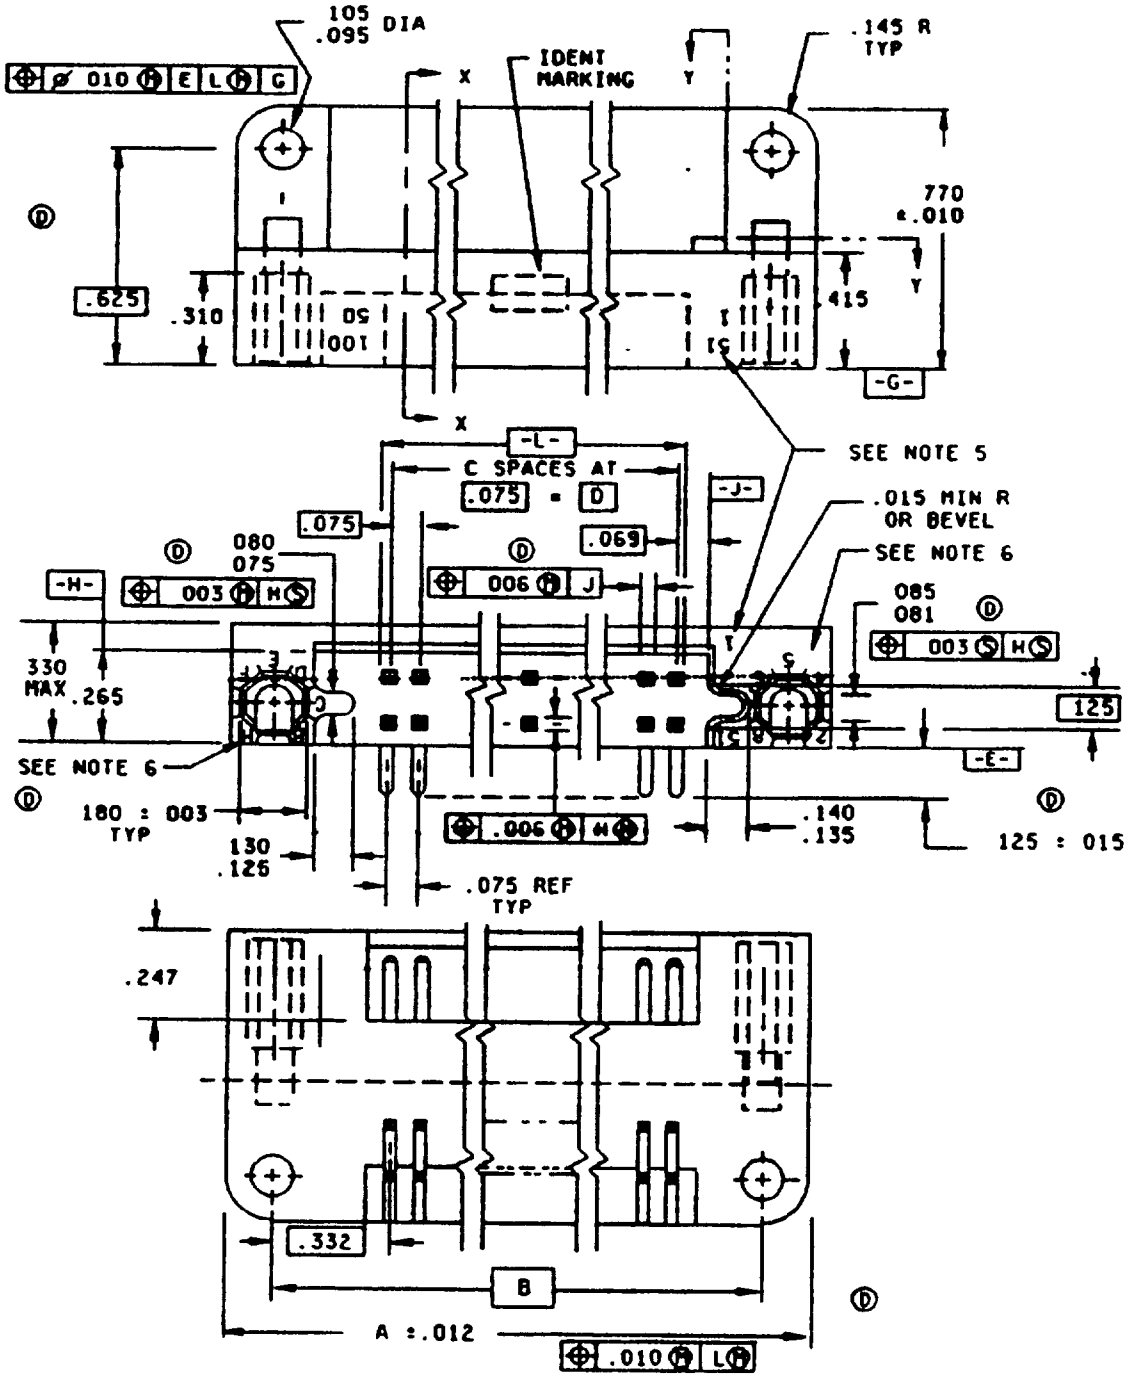


FIGURE 2. Connector plug, type II, .075 (1 90 mm) spacing

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.



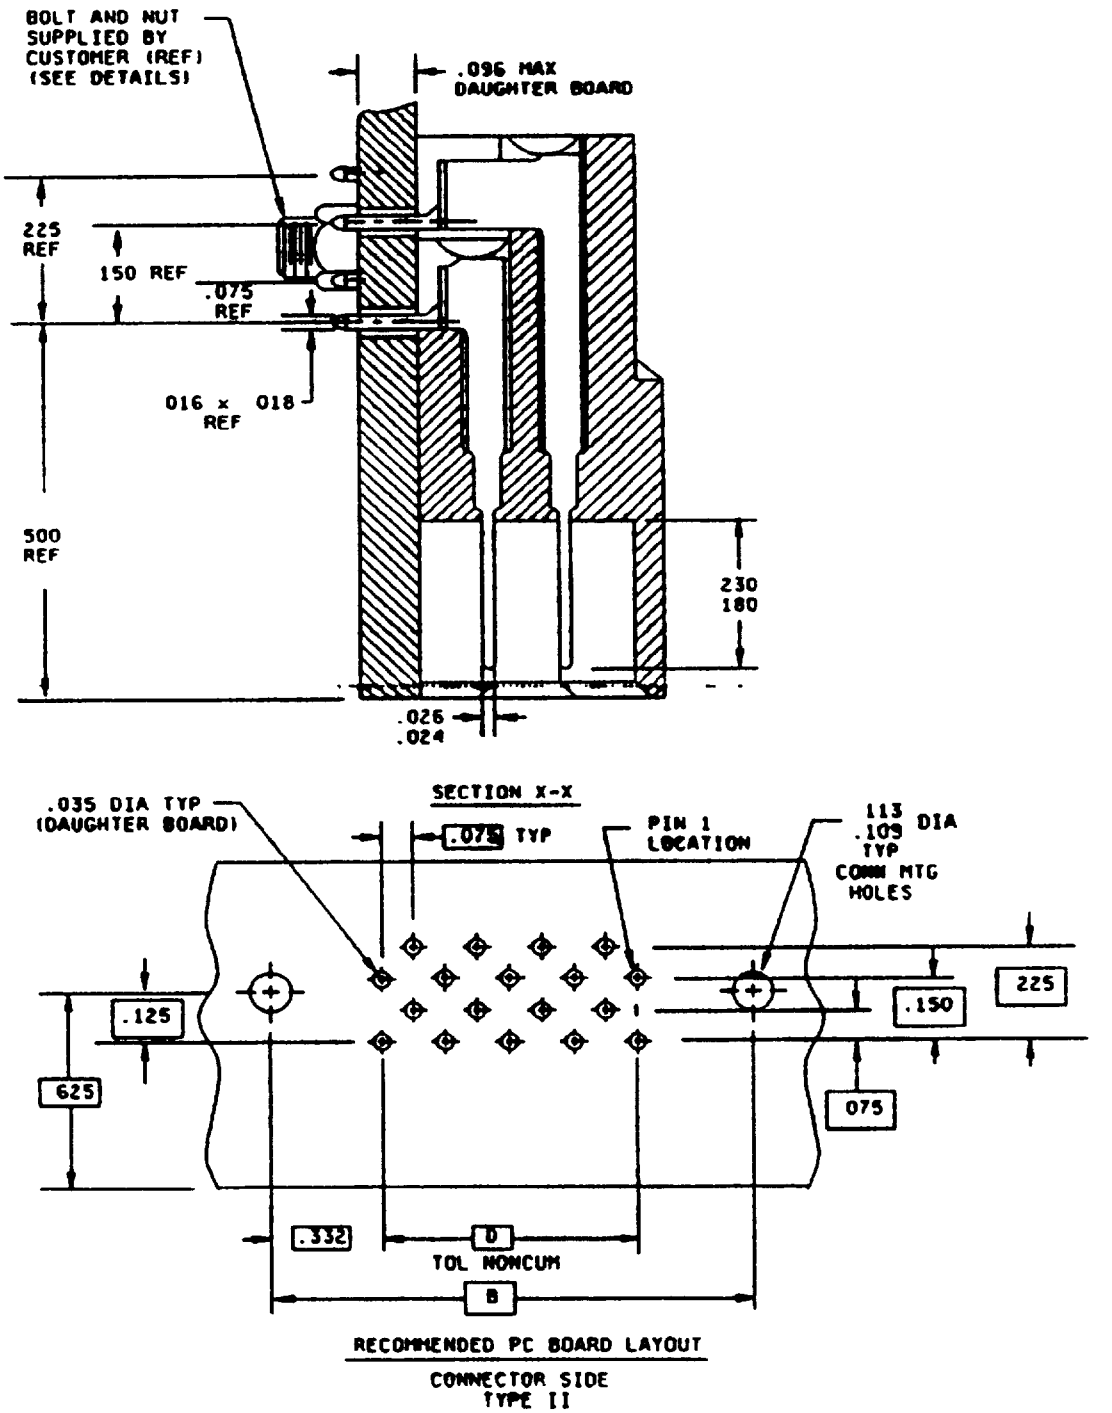


FIGURE 2 Connector plug, type II, .075 (1.90 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:53Z
Check the source to verify that this is the current version before use.

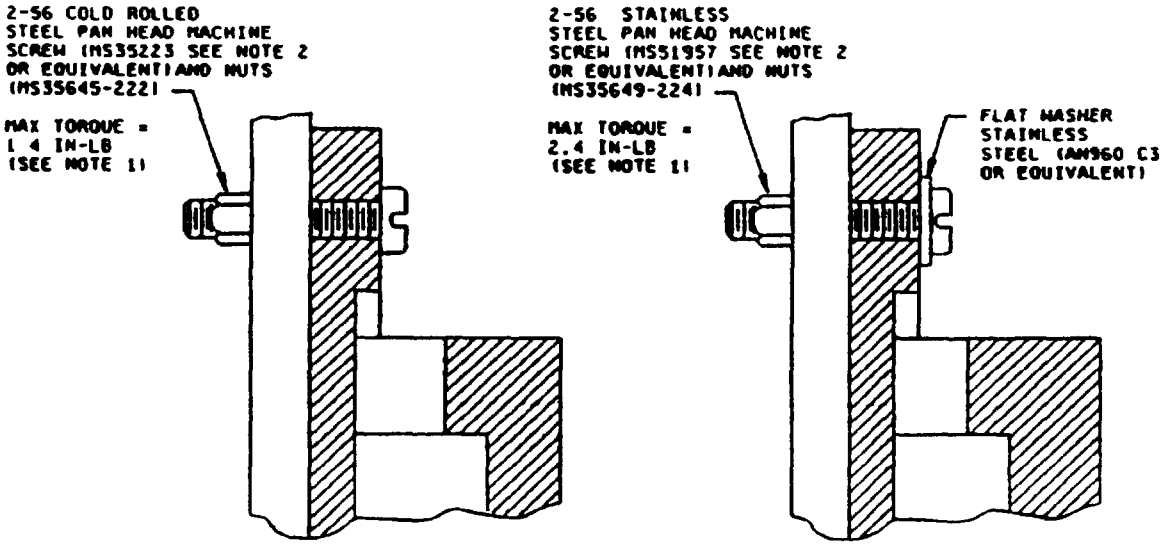

MOUNTING RECOMENDATIONS

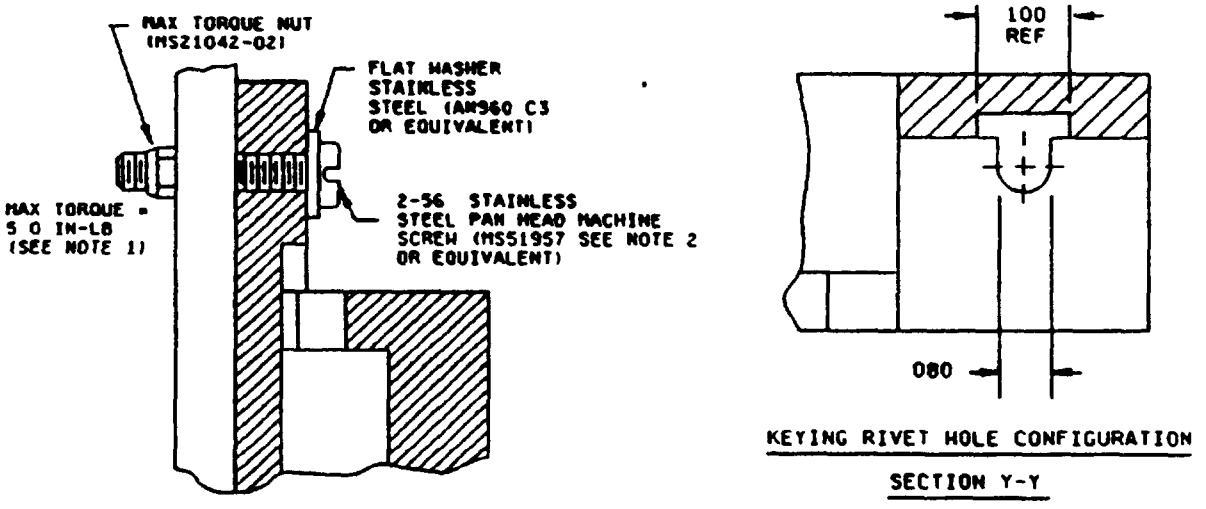

KEYING RIVET HOLE CONFIGURATION

SECTION Y-Y

NOTES
1 Torque wrench must be used when fastening connector to printed circuit board
2 Length to be determined by user

FIGURE 2 Connector plug, type II, 075 (1 90 mm) spacing - Continued

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:53Z
Check the source to verify that this is the currentversion before use.

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.080	2.03	.150	3 81
.005	0.13	.081	2.06	.180	4 57
.006	0 15	.085	2 16	225	5 72
008	0.20	095	2 41	.230	5 84
.010	0.25	.096	2 44	247	6 27
.012	0.30	100	2.54	.265	6 73
015	0.38	105	2 67	310	7 87
016	0.41	109	2 77	330	8 38
018	0 46	113	2.87	332	8 43
024	0.61	.125	3.18	377	9 58
026	0 66	130	3.30	415	10 54
035	0 89	135	3 43	500	12 70
069	1 75	140	3 56	625	15 88
075	1 91	145	3 68	770	19 56

NOTES
1. Dimensions are in inches
2. Metric equivalent are given for formation only
3. Unless otherwise specified, tolerance is ±.005 (0 13 mm) on decimals and ±2° on angles
4. These connectors mate with connectors specified in MIL-C-55302/24 and MIL-C-55302/25.
(D) 5. Numbers indicating every 5 cavities marked or molded on side Numbers indicating end cavities and line indicating every 5 cavities marked or molded on mating face
6. Key locations embossed on indicated surfaces

FIGURE 2 Connector plug, type II 075 (1 90 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 202640-22T22:53Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and dimensions for types I and II

Dash number	Type number	Number of contacts	Dimensions 1/				Contact identification numbers
			A	B	C	D	
01 16	I II	10	1.255 (31.88)	.965 (24.51)	4	300 (7.62)	1, 6
02 17	I II	20	1.630 (41.40)	1.340 (34.04)	9	.675 (17.14)	1, 11
03 18	I II	30	2 005 (50.93)	1.715 (43.56)	14	1.050 (26.67)	1, 16
04 19	I II	40	2.380 (60.45)	2.090 (53.09)	19	1.425 (36.20)	1, 21
05 20	I II	50	2.755 (69.98)	2.465 (62.61)	24	1.800 (45.72)	1, 26
06 21	I II	60	3.130 (79 50)	2.840 (72.14)	29	2.175 (55.24)	1, 31
07 22	I II	70	3 505 (89 03)	3.215 (81.66)	34	2 550 (64.77)	1, 36
08 23	I II	80	3.880 (98.55)	3.590 (91.19	39	2.925 (124 46)	1, 41
09 24	I II	90	4.255 (108 08)	3.965 (100.71)	44	3 300 (83.82	1, 46
10 25	I II	100	4.630 (117.60)	4.340 (110.24)	49	3 675 (93.34)	1, 51
11 26	I II	110	5.005 (127.13)	4.715 (119.76)	54	4.050 (102.87)	1, 56
12 27	I II	120	5.380 (136.65)	5.090 (129.29)	59	4 425 (112.40)	1, 61
13 28	I II	150	6.505 (165.23)	6.215 (157.86)	74	5.550 (140.97)	1, 76
14 29	I II	160	6.880 (174.75)	6.590 (167.39)	79	5.925 (150.50)	1, 81
15 30	I II	180	7.630 (193 80)	7.340 (186.44)	89	6.675 (169 54)	1, 91

1/ Metric equivalents are in parentheses

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction

Dimensions and configuration. See figures 1 and 2 and table I

Material: In accordance with MIL-C-55302

(D) Insulator body: Insulator material shall be in accordance with MIL-C-55302 or MIL-M-24519 type GLCP-30F

(D) Contact material: Contact material shall be in accordance with MIL-C-55302 or beryllium copper alloy CDA174 in accordance with ASTM B768

Plating: The contact plating for the engagement area, (150 inch minimum length) shall be gold over nickel in accordance with MIL-C-55302. The contact area between the engagement area and the solder tail shall be nickel in accordance with MIL-C-55302 The contact plating for the solder tail area shall be tin-lead over nickel in accordance with MIL-C-55302

Contact identification. See figures 1 and 2.

Contact rating 3 0 amperes maximum per contact, 2 25 amperes continuous per contact at 75°F

Mating and unmating The maximum mating force in pounds shall be the number of contacts multiplied by 25 and the withdrawal force in pounds shall be a minimum of 025 times the number of contacts and shall not exceed the measured insertion force

Contact resistance: No individual contact pair shall have a resistance exceeding 020 ohm

Contact retention 3 pounds minimum.

Dielectric withstanding voltage:

Sea level - 900 volts rms

High altitude - 200 volts rms.

Keying. See MIL-C-55302/31.

Part number. M55302/156 - (and dash number from table I)

Patent number 3,404,367. The Government has a royalty-free license under the above patent for the benefit of manufacturers of the items called for in this specification, either for the Government or for use in equipment to be delivered to the Government

CONCLUDING MATERIAL

Custodians
Army - CR
Navy - EC
Air Force - 17

Review activities
Army - AR, MI
Navy - AS, OS
Air Force - 85, 99

User activities.
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity
Army - CR

Agent
DLA - ES

(Project 5935-3858-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.