
CONNECTOR, CABLE OUTLET, ELECTRICAL, GENERAL PURPOSE, CABLE CONNECTING, GROUNDING, 2 POLE, 3 WIRE, 50 AMPERES, 250 VOLTS, 50/60 HERTZ

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification W-C-596.

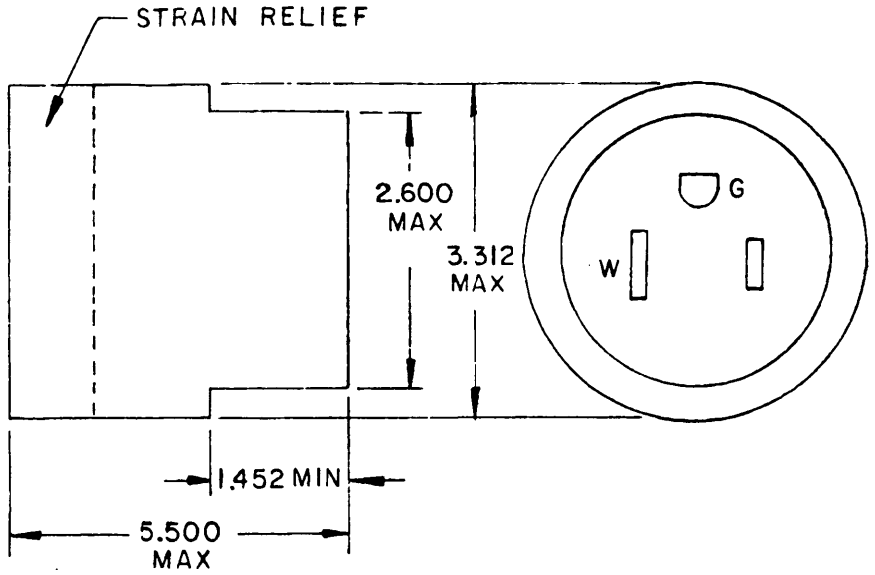

INCHES	MM
1.452	36.88
2.600	66.04
3.312	84.12
5.500	139.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Configuration and dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:32Z
Check the source to verify that this is the current version before use.

Dimensions conform to ANSI C73.53. (Reference NEMA configuration 6-50R.)

Armored construction: Not acceptable.

Ratings:
Voltage: 250 volts.
Current: 50 amperes.
Frequency: 50/60 hertz.

Mating connectors: W-C-596/165 and /167.

Strain relief: Accommodate cable diameter .830-1.100 inches.

Part number: WC596/166-(dash number from table I).

TABLE I. Dash number

Dash No.	Supersedes style	Description
1		Cable outlet

TABLE II. Supersession and cross reference

Active Government part number	Superseded numbers		
	FSCM 1/ 74545	FSCM 04009	FSCM 81091
WC596/166-1		6709 6710	

1/ FSCM is the Federal Supply Code for Manufacturers in accordance with Federal Supply Handbooks H4-1 and H4-2.

Military custodians:
Army - CR
Navy - YD
Air Force - 85

Review activities:
Army - MI
Navy - EC, AS
Air Force -

User activities:
Army - ME, AV
Navy - MC, SH
Air Force -

Preparing activity:
DLA - ES

Civil agency coordinating activities:
DCGOVT - DCG
DOT - ACO
GSA - FSS, PCD
HEW - FEC
Interior - BPA
USDA - BPA
VA - DMS

(Project 5935-3141-7)

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:32Z
Check the source to verify that this is the current version before use.