
FEDERAL SPECIFICATION SHEET

CONNECTOR, RECEPTACLE, ELECTRICAL, GENERAL PURPOSE, SINGLE, GROUNDING, 2 POLE, 3 WIRE, 50 AMPERES, 277 VOLTS, 50/60 HERTZ


This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the connector described herein shall consist of this document and the latest issue of Specification W-C-596.

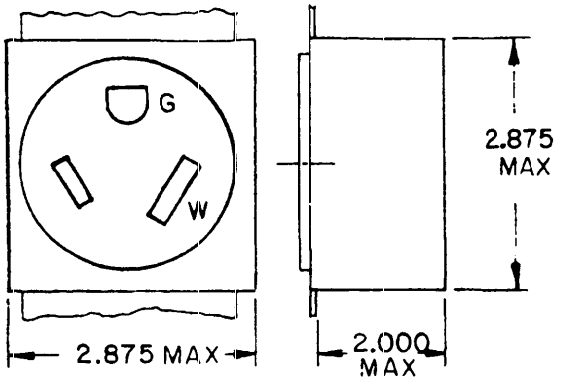

FLUSH MOUNT
WC596/172-1

INCHES	MM
2.000	50.80
2.500	63.50
2.875	73.02
3.000	76.20
5.000	127.00

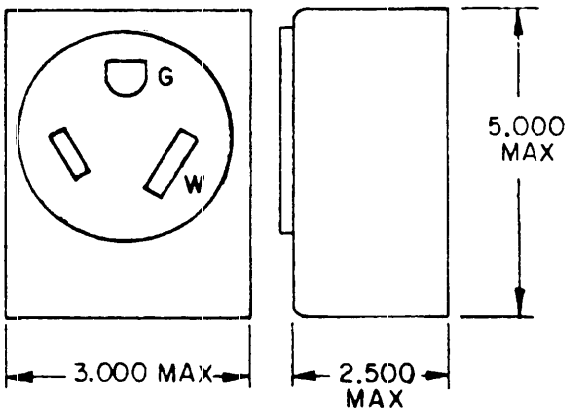

SURFACE MOUNT
WC596/172-2

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

Source: https://assist.dla.mil -- Downloaded: 2026/10-26T11:32Z
Check the source to verify that this is the current version before use.

Design and configuration: See figure 1.

Dimensions conform to ANSI C73.65. (Reference NEMA configuration 7-50R.)

Ratings:
Voltage: 277 volts.
Current: 50 amperes.
Frequency: 50/60 hertz.

Mating connector: W-C-596/173.

Part number: WC596/172-(dash number from table I).

TABLE I. Dash number

Dash No.	Supersedes style	Description
1		Single, flush mounted
2		Single, surface mounted

TABLE II. Supersession and cross reference

Active Government part number	Superseded numbers		
	FSCM 1/ 41326	FSCM 04009	FSCM 81091
WC596/172-1	4255	5796	9365
WC596/172-2			

1/ FSCM is the Federal Supply Code for Manufacturers in accordance with Federal Supply Handbooks H4-1 and H4-2.

Military custodians:
Army - CR
Navy - YD
Air Force - 85

Review activities:
Army - MI
Navy - EC, AS
Air Force -

User activities:
Army - ME, AV
Navy - MC, SH
Air Force -

Preparing activity:
DLA - ES

Civil agency coordinating activitie
DCGOVT - DCG
DOT - ACO
GSA - FSS, PCD
HEW - FEC
Interior - BPA
USDA - BPA
VA - DMS

(Project 5935-3141-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:32Z
Check the source to verify that this is the current version before use.