FEDERAL SPECIFICATION SHEET

FUSECLIP, CARTRIDGE, FERRULE CONTACT TYPE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

(This specification sheet forms a part of the latest issue of Federal Specification W-F-870.)

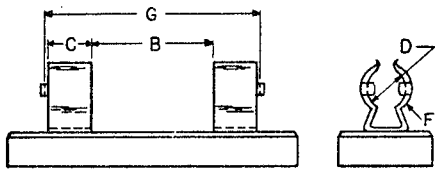

Table I. Dimensions of ferrule-contact type cartridge fuseclips

Fuseclip Part No.	Fuse Rating			Fuse Clip Design			Fuseclip Mounting		
	Class	Volts	Amps	Min. Width of contact clip C	Diameter of ferrule D	Min. Thickness of clip F	Distance between clips a* B	Distance between end stops Minimum G	Distance between end stops Maximum G
W-F-870/1-01	H	250	30	1/2	9/16 ± 0.006	0.028	1	2-1/32	2-1/8
-02	H	250	60	5/8	13/16 ± 0.008	0.040	1-3/4	3-1/32	3-1/8
-03	H	600	30	6 1/2	13/16 ± 0.008	0.028	4	5-1/32	5-1/8
	J	600	30	1/2	13/16 ± 0.008	0.028	1-1/4	2-9/32	2-3/8
-04	H	600	60	5/8	1-1/16 ± 0.008	0.040	4-1/4	5-1/32	5-5/8
	J	600	60	5/8	1-1/16 ± 0.008	0.040	1-1/8	2-13/32	2-1/2
	G	300	15	0.305	13/32 ± 0.006	0.017	3/4	1.345	1.365
-05	G	300	20	0.305	13/32 ± 0.006	0.017	27/37	1.440	1.460
	G	300	30	0.305	13/32 ± 0.006	0.017	1-1/16	1.660	1.700
-06	G	300	60	0.500	13/32 ± 0.006	0.040	1-1/4	2.281	2.375
-07			30	0.290	0.406 ± 0.006	0.028	0.300	0.900	0.930
-08	T	250	60	0.290	0.563 ± 0.006	0.040	0.300	0.900	0.930
-09			30	0.290	0.563 ± 0.006	0.028	0.930	1.540	1.580
-10	T	600	60	0.390	0.812 ± 0.006	0.040	0.740	1.600	1.630

a* Tolerances for the B dimensions are: 60 amperes or less + 1/32 inch and -1/16 inch; 100 and 200 amperes, + 1/16 inch and -1/32 inch; 400 and 600 ampers + 3/32 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:33Z
Check the source to verify that this is the current version before use.