FEDERAL SPECIFICATION SHEET

FUSECLIP, CARTRIDGE, J AND T TYPE, FUSES BOLTED IN PLACE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

(This specification sheet forms a part of the latest issue of Federal Specification W-F-870.)

CLASS J FUSEHOLDER – FUSE BOLTED IN PLACE

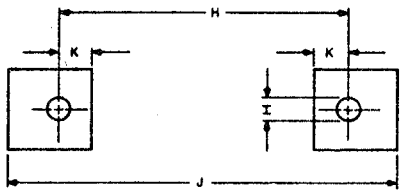

TABLE I. Dimensions of J and T fuseclips - bolted in place

Fuseclip Part No.	Fuse Rating			Center to outer of clearance holes	Diameter of stud	Diameter of clearance hole	Minimum Unstructed clearance	Maximum Clearance between end stop	End of terminal to out of clearance or stud or threaded hole Maximum
	Class	Volts	Amps	H	I			J	K
W-F-870/3-01	T	~~300~~250	100	1.556	1/4		2.176	2.398	0.340
02			200	1.695	5/16		2.458	2.690	0.410
03			400	1.844	3/8		2.790	3.003	0.480
04			600	2.031	7/16		3.103	---	0.560
05	T	600	100	2.352	1/4		2.993	3.190	0.340
06			200	2.507	5/16		3.290	3.565	0.410
07			400	2.719	3/8		3.665	3.924	0.480
08			600	2.953	7/16		4.024	---	0.560
09	J	600	100	3-5/8	1/4	9/32	4-23/32		3/8
10			200	4-3/8	1/4	9/32	5-27/32		9/16
11			400	5-1/4	3/8	13/32	7-7/32		51/64
12			600	6	1/2	17/32	8-3/32		63/64

*The other dimensions for blade contact cartridge fuseclips specified on W-F-870/2 shall apply.

FSC 5920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:33Z
Check the source to verify that this is the current version before use.