FEDERAL SPECIFICATION SHEET

FUSECLIP, CARTRIDGE, CLASS CC, FERRULE CONTACT

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

(This specification sheet forms a part of the latest issue of Federal Specification W-F-870.)

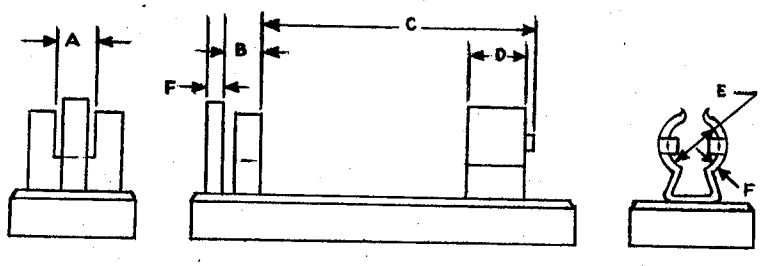

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions of class CC fuseclip

Fuseclip Part No.	Fuse Rating			Width of rejection hole	Minimum distance between shoulder stop and contact	Distance between stops C		Width of contact clip	Diameter of ferrule	Minimum thickness of contact lens
	Class	Volts	Amps	A	B	Min	Max	D	E	F
W-F-870/9-01	CC	600	20	0.276	0.031	1.411	1.441	0.375 + 0.120 - 0.020	13/32 ± 0.005	0.017

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:34Z
Check the source to verify that this is the current version before use.

Military Custodian:

DLA-ES

Preparing Activity:

GSA-FSS

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See Section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:34Z
Check the source to verify that this is the current version before use.