
[INCH-POUND]

W-S-896/2D
2 June 1993
SUPERSEDING
W-S-896/2C
27 December 1989

FEDERAL SPECIFICATION SHEET
SWITCHES, TOGGLE AND LOCK, FLUSH MOUNTED (AC)
(DETAIL SPECIFICATION)

This specification is approved by the Assistant Administrator, Federal Supply and Services, General Services Administration, for the use of all Federal agencies

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: W-S-896.

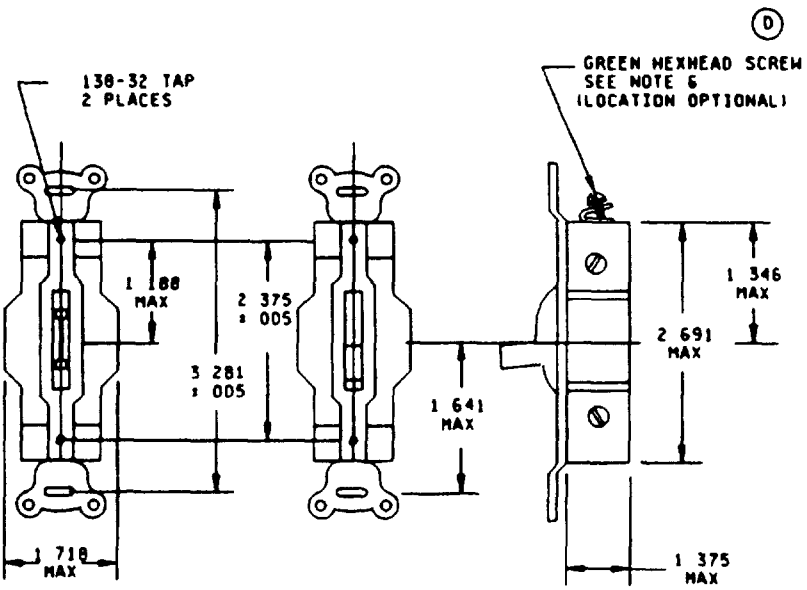

LOCKING TYPE

TOGGLE HANDLE TYPE

Inches	mm
005	0.13
.138	3.51
.406	10.31
.925	23.50
1.188	30.18
1.346	34.19
1.375	34.93
1 641	41 68
1.718	43.64
2.375	60 33
2.691	68 35
3 281	83.34

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only
3. The switch handle shall be of size to fit a wall plate cutout of .406 wide X .925 minimum high.
4. Keys shall be furnished with each locking type switch
(D) 5. Exact shape of switch optional provided that envelope dimensions are not exceeded.
(D) 6. Green hex-head screw is for ground wire and is supplied only when specified by Part or Identifying Number (PIN)

FIGURE 1 Switch, toggle and lock

(D) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction See figure 1

Electrical ratings: See table I

Government Part or Identifying Number (PIN): WS896/2-(dash numbers from table I).

Examples:

(D) WS896/2-01A-G 120/277 volts, 30 amperes, single pole, brown handle, grounding terminal required

WS896/2-15F. 120 volts, 30 amperes, single pole, illuminated ivory locator light handle, no grounding terminal

TABLE I. Dash numbers and switch characteristics

Dash number 1/ 2/	Available options for unlighted switches	Poles/way	Current rating - ac only 3/	
			120 volts	277 volts
			Amperes	Amperes
01	A,B,C,D,E,G	Single pole	30	30
02	A,B,C,D,E,G	Single pole	20	20
03	A,B,C,D,E,G	Single pole	15	15
04	A,B,C,D,E,G	Double pole	30	30
05	A,B,C,D,E,G	Double pole	20	20
06	A,B,C,D,E,G	Double pole	15	15
07	A,B,C,D,E,G	Three way	30	30
08	A,B,C,D,E,G	Three way	20	20
09	A,B,C,D,E,G	Three way	15	15
10	A,B,C,D,E,G	Four way	30	30
11	A,B,C,D,E,G	Four way	20	20
12	A,B,C,D,E,G	Four way	15	15
Dash number 1/ 2/	Available options for lighted switches	Poles/way	Current rating - ac only 3/	
			120 volts	208-277 volts
			Amperes	Amperes
15	F,H,J,K,L,M,N,P,Q,R,S,T	Single pole	30	
16	F,H,J,K,L,M,N,P,Q,R,S,T	Single pole		30
17	F,H,J,K,L,M,N,P,Q,R,S,T	Single pole	20	
18	F,H,J,K,L,M,N,P,Q,R,S,T	Single pole		20
19	F,H,J,K,L,M,N,P,Q,R,S,T	Single pole	15	
20	F,H,J,K,L,M,N,P,Q,R,S,T	Single pole		15
21	F,H,J,K,L,M,N,P,Q,R,S,T	Double pole	30	
22	F,H,J,K,L,M,N,P,Q,R,S,T	Double pole		30
23	F,H,J,K,L,M,N,P,Q,R,S,T	Double pole	20	
24	F,H,J,K,L,M,N,P,Q,R,S,T	Double pole		20
25	F,H,J,K,L,M,N,P,Q,R,S,T	Double pole	15	
26	F,H,J,K,L,M,N,P,Q,R,S,T	Double pole		15

See footnotes at end of table

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:34Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and switch characteristics - Continued.

Dash number 1/ 2/	Available options for lighted switches	Poles/way	Current rating - ac only 3/	
			120 volts	208-277 volts
			Amperes	Amperes
27	F,H,J,K,L,M,N,P,Q,R,S,T	Three way	30	
28	F,H,J,K,L,M,N,P,Q,R,S,T	Three way		30
29	F,H,J,K,L,M,N,P,Q,R,S,T	Three way	20	
30	F,H,J,K,L,M,N,P,Q,R,S,T	Three way		20
31	F,H,J,K,L,M,N,P,Q,R,S,T	Three way	15	
32	F,H,J,K,L,M,N,P,Q,R,S,T	Three way		15
33	F,H,J,K,L,M,N,P,Q,R,S,T	Four way	30	
34	F,H,J,K,L,M,N,P,Q,R,S,T	Four way		30
35	F,H,J,K,L,M,N,P,Q,R,S,T	Four way	20	
36	F,H,J,K,L,M,N,P,Q,R,S,T	Four way		20
37	F,H,J,K,L,M,N,P,Q,R,S,T	Four way	15	
38	F,H,J,K,L,M,N,P,Q,R,S,T	Four way		15

(D) 1/ The complete dash number will include an additional letter to indicate the applicable design of the actuating member Add a "-G" suffix if a grounding terminal is required. Letters used to denote actuating member design are as follows:

A - Brown handle
B - Ivory handle
C - Locking, key operated with brown key guide
D - Locking, key operated with ivory key guide
E - Locking, key operated with simulated stainless steel key guide
F - Illuminated ivory locator light
G - Locking, key operated with black key guide
H - Illuminated white locator light
J - Illuminated clear locator light
K - Illuminated red locator light
L - Illuminated orange locator light
M - Illuminated amber locator light
N - Illuminated ivory locator light
P - Illuminated white pilot light
Q - Illuminated clear pilot light
R - Illuminated red pilot light
S - Illuminated orange pilot light
T - Illuminated amber pilot light.

Locator light indicates a light which is operating when the circuit is open. Pilot light indicates a light which is operating when the circuit is closed. Colors specified are in accordance with NEMA Standard WD-1 using the Munsell notation.

2/ WS896/2-13 and WS896/2-14 have been canceled Replace with WS896/2-03 and WS896/2-09 respectively

3/ A switch having a higher current rating and qualified may be supplied in substitution for the switch of the specified current rating A qualified switch rated for 120-277 volts may be supplied in substitution for a switch specified with a rating of 120 volts or 208-277 volts, however, all switches with illuminated handles must have lamps that illuminate at the specified operating voltage.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:34Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Military interests

Custodians
Army - ER
Navy - YD
Air Force - 85

Review activities
Air Force - 99

User Activity
Navy - CG, SH

Civil agency coordinating activities

DC GOVT - DCG
GSA - FSS/7FXE
HHS - FEC

Preparing activity
DLA - ES

(Project 5930-1483-01)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:34Z
Check the source to verify that this is the current version before use.