INCH-POUND

W-S-896/38
2 June 1993
SUPERSEDING
W-S-896/3A
23 August 1983


FEDERAL SPECIFICATION SHEET

SWITCHES, TOGGLE HANDLE, FLUSH MOUNTED, MERCURY (AC)

(DETAIL SPECIFICATION)

This specification is approved by the Assistant Administrator, Federal Supply and Services, General Services Administration, for the use of all Federal agencies

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: W-S-896.

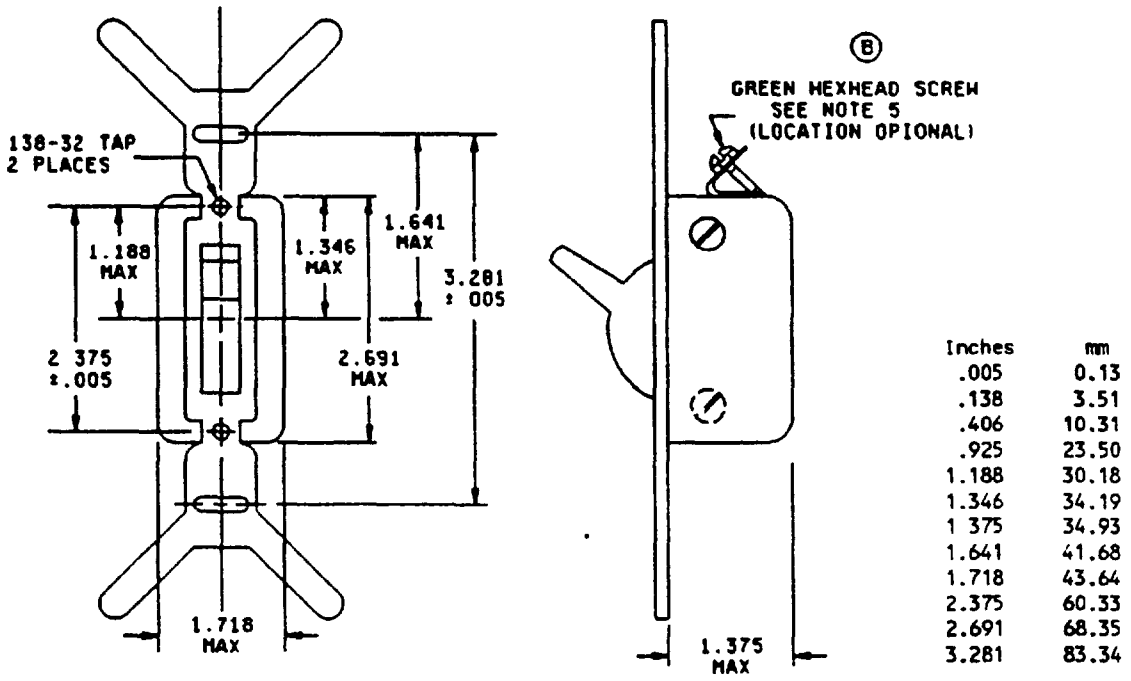


| Inches | mm |
|---|---|
| .005 | 0.13 |
| .138 | 3.51 |
| .406 | 10.31 |
| .925 | 23.50 |
| 1.188 | 30.18 |
| 1.346 | 34.19 |
| 1 375 | 34.93 |
| 1.641 | 41.68 |
| 1.718 | 43.64 |
| 2.375 | 60.33 |
| 2.691 | 68.35 |
| 3.281 | 83.34 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The switch handle shall be of size to fit a wall plate cutout of .406 wide X .925 minimum high.
(B) 4. Exact shape of switch optional provided that envelope dimensions are not exceeded.
(B) 5. Green hex-head screw is for ground wire and is supplied only when specified by Part or Identifying Number (PIN).

FIGURE 1. Switch, toggle, mercury.

(B) denotes changes.


DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Design and construction See figure 1

Electrical ratings See table I

Government part number WS896/3-(dash number from table I)

Examples

(B) WS896/3-01A-G 120 volts, 15 amperes, single pole, brown handle, grounding terminal required

WS896/3-01F 120 volts, 15 amperes, single pole, illuminated ivory locator light handle, no grounding terminal

(B) TABLE I Dash numbers and switch characteristics

| Dash number 1/ | Available options | Poles | Current rating ac only 120 volts |
|---|---|---|---|
| | | | Amperes |
| 01 | A, B, F | Single pole | 15 |
| 02 | A, B, F | Double pole | 15 |
| 03 | A, B, F | Three pole | 15 |

(B) 1/ The complete dash number will include an additional letter to indicate the applicable design of the actuating member Add a "-G" suffix if a grounding terminal is required Letters used to denote actuating member design are as follows

A - Brown handle
B - Ivory handle
F - Illuminated ivory locator light

The locator light indicates a light which is operating when the circuit is open

CONCLUDING MATERIAL

Military interests
Custodians
Army - ER
Navy - YD
Air Force - 85

Review activities
Air Force - 99

User activity
Navy - CG, SH

Civil agency coordinating activities
DC GOVT - DCG
GSA - FSS/7FXE
HHS - FEC

Preparing activity
DLA - ES

(Project 5930-1483-02)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:34Z
Check the source to verify that this is the current version before use.