MILITARY SPECIFICATION

COVERS, AUTOMOBILE DISTINGUISHING PLATE COMMANDANT AND GENERAL OFFICERS (USMC)

1. SCOPE

1.1 Scope. - This specification covers requirements for cotton duck covers for the automobile distinguishing plate used by the Commandant and General Officers of the Marine Corps.

1.2 Classification. - The covers shall be of one type and two sizes, as specified (see 6.2).

Size 1 - 11 inches wide by 9 inches high
Size 2 - 10-1/4 inches wide by 7-1/2 inches high

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army And Numbered
CCC-D-950	- Dyeing And Aftertreating Processes For Cotton Cloths

MILITARY

MIL-F-10884	- Fasteners, Snap
MIL-P-19611	- Plates, Automobile, Distinguishing: Metal; Emblem And Star (Commandant's And General Officer's, USMC)

STANDARDS

FEDERAL

FED. STD. NO. 751	- Stitches, Seams, And Stitchings

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	- Marking For Shipment And Storage
MS-27981	- Fasteners, Snap, Style 2A

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies of the freight classification rules should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples. - Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample approval. - Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished cover shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of the specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Cloth, cotton duck. - The cloth, before finishing, shall be 12.29-ounces per square yard, conforming to type III of CCC-C-419.

3.3.1.1 Color and treatment. - The cotton duck shall be dyed olive drab 7 and shall be water-repellent and mildew-resistant after treated in accordance with type I, class B of CCC-D-950.

3.3.2 Thread, polyester. - The thread shall conform to type I or II, class 1, sub-class A or B, size F of V-T-285.

3.3.2.1 Color and colorfastness. - The thread shall be dyed olive drab shade S-1, cable No. 66022. The dyed thread shall show colorfastness to weathering, equal to or better than the standard sample when tested as specified in V-T-285.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

When no standard sample is available, the dyed thread shall show good fastness to weathering when tested as specified in V-T-285.

3.3.3 Snap fasteners. - The snap fasteners shall be brass, black finish, conforming to style 2A, finish 2, construction A of MIL-F-10884 and MS-27981, except the button shall consist of the eyelet only, no shell or reinforcement required; the eyelets shall be size 1, part No. 5b. The fastener components shall consist of an eyelet, socket, stud and eyelet.

3.4 Design. - The cover shall be as shown in Figure 1, consisting of a single piece of cotton duck folded and seamed to specified size and shape and the open end hemmed and provided with snap fasteners.

3.5 Patterns. - The standard pattern furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 3/8 inch seam allowance.

3.5.1 List of pattern parts. - Covers shall be cut from the specified material in accordance with pattern parts indicated:

Item	Pattern nomenclature Material: Cloth, cotton duck	No. of cut parts
1.	Body piece	1

3.6 Construction.

3.6.1 Manufacturing requirements. - The covers shall be manufactured in strict accordance with the operations and the stitch, seam, and stitching types specified in Table I.

3.6.1.1 Operations. - The supplier is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the cover.

3.6.1.2 Stitches, seams and stitching. - The stitch, seam, and stitching types specified in Table I shall conform to FED. STD. NO. 751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. - Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

TABLE I. MANUFACTURING REQUIREMENTS

OPN NO	OPERATION	STITCH TYPE	SEAM OR STITCHG TYPE	STITCHES PER INCH	THREAD	
					NEEDLE	BOBBIN OR LOOPER
1.	Cutting.					
	a. Cut covers in strict accordance with patterns furnished by the Government.					
	b. Cut material in the direction indicated by directional lines on pattern.					
2.	Hem ends.					
	a. Hem both ends of the duck 3/4 ± 1/16 inch with raw edges turned under not less than 3/8 inch and stitch 1/8 inch from edge.	301	EFb-1	8-10	F	F
3.	Attach snap fasteners.					
	a. Securely clinch snap fastener socket and eyelets (female) through one hem and stud and eyelets (male) through other hem to properly engage with each other. The snap fasteners shall be centered on the hems and positioned as shown in Figure 1.					
4.	Seam sides.					
	a. Fold the duck end to end and seam sides 1/8 inch from edge.	301	SSc-1	8-10	F	F

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. - The finished covers shall conform to the measurements specified in Table II and Figure 1. Letters A and B in Table II refer to location of measurement shown in Figure 1.

Table II. - Finished measurements

Size	Width (A) inches	Height (B) inches
1	11	9
2	10-1/4	7-1/2
Tolerance	± 1/4	± 1/4

3.8 Workmanship. - The finished cover shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. - When a preproduction sample is required, it shall be examined for defects listed in 4.3.2.1 and 4.3.2.2.

4.3 Sampling for inspection and acceptance. - Sampling for inspection and acceptance shall be made in accordance with the provisions of MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection. - In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, figures and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 End product inspection. - The lot shall consist of all completely fabricated covers offered for inspection at one time. The sample unit shall be one completely fabricated cover. Defects shall be classified in accordance with the list shown in 4.3.2.1 and 4.3.2.2, and the inspection levels and acceptable quality levels (AQLs) shall be as specified in 4.3.2.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

4.3.2.1 Visual examination. -

Examine	Defect	Classification Major	Minor A	Minor B
Fabric	Cuts, tears or holes.	X		
	Any smash, weak place, broken or missing yarns, multiple floats or open places.	X		
	Any shade bar or fine or coarse filling bar.		X	
Snap fasteners	Size or type not as specified.	X		
	Not securely set, i.e., loosely clinched permitting rotation or separation of sockets and stud-eyelet combination. Excessively clinched cutting fabric.	X		
	Broken or malformed; corroded areas; burrs or sharp edges which may cause injury in handling.	X		
	Finish omitted or not as specified.		X	
Location of snap fasteners	Snap fasteners misplaced; seriously affecting appearance or serviceability.	X		
Seams and stitching				
Open seams	1/4 inch or more, but not more than 1/2 inch.		X	
	More than 1/2 inch.	X		

Note: A seam shall be classified as open when one or more stitches joining a seam are broken, or when 2 or more continuous skipped stitches or run-offs occur.

Run-offs (see open seams)				
Raw edges	More than 1/2 inch when securely caught in stitching.		X	

Note: Raw edges not securely caught in stitching shall be classified as open seams.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Seam and stitch type	Wrong seam or stitch type: -seriously affecting serviceability.	X		
	-affecting serviceability but not seriously.			X
Stitch tension	Loose, resulting in loosely exposed bobbin or top thread; tight, resulting in tightness of fabric on seams.			X
Stitches per inch	One stitch less than minimum specified.			X
	Two or more stitches less than minimum specified.		X	
	One or more stitches in excess of maximum specified.			X
Stitching margins	Over specified tolerance by more than 1/4 inch.	X		
	Under specified tolerance.			X
Stitching ends	Not backstitched, or backstitched less than 1/2 inch (except where held down by other stitching or turned under).			X
Thread breaks	Backstitched less than 1 inch.			X
Note: Thread breaks not backstitched shall be classified as open seams.				
Stitching	Any required rows of stitching omitted.	X		
Needle chews	Needle chews expected to develop into holes.	X		
Repairs	Mends, darns or patches.	X		
Hems	Twisted or pleated.		X	
	Less than specified width by more than 1/4 inch.			X
Cleanness	Grease or oil stains.	X		
	Thread ends not trimmed.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor A	Minor B
Construction	Any required detail of construction omitted or not as specified:			
	-seriously affecting serviceability.	X		
	-affecting serviceability, but not seriously.			X

4.3.2.2 Dimensional examination. -

Examine	Defect	Classification Major	Minor
Overall dimensions	Smaller than specified dimensions less applicable minus tolerances indicated in Table II.	X	
	Larger than specified dimensions and applicable plus tolerance indicated in Table II.		X

4.3.2.3 Inspection levels and acceptable quality levels. - The inspection levels and acceptable quality levels (expressed in defects per hundred units) shall be as follows:

Examination	Inspection level	AQL
For defects applicable to 4.3.2.1	II	2.5 Major 6.5 Total Major & Minor A defects combined 15.0 Total Major A & B defects combined
For defects applicable to 4.3.2.2	S-4	4.0 Major 15.0 Minor

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Level C. - Covers of one size only shall be packaged in accordance with the industry's practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

5.2 Packing.

5.2.1 Level C. - Covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. - In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Nomenclature. - The item identification nomenclature shall be marked as follows on all containers.

Size 1: COVER, AUTOMOBILE DISTINGUISHING, PLATE, CMC

Size 2: COVER, AUTOMOBILE DISTINGUISHING, PLATE, GENERAL OFFICERS

6. NOTES

6.1 Intended use. - The covers are intended for use on automobile distinguishing plates conforming to MIL-P-19611 (MC).

6.2 Ordering data. - Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. Whether preproduction sample is required (see 3.2).

6.3 Samples. - For information regarding the availability of sample cover, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Marginal notations. - Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Navy-MC

Preparing Activity:
Navy-MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

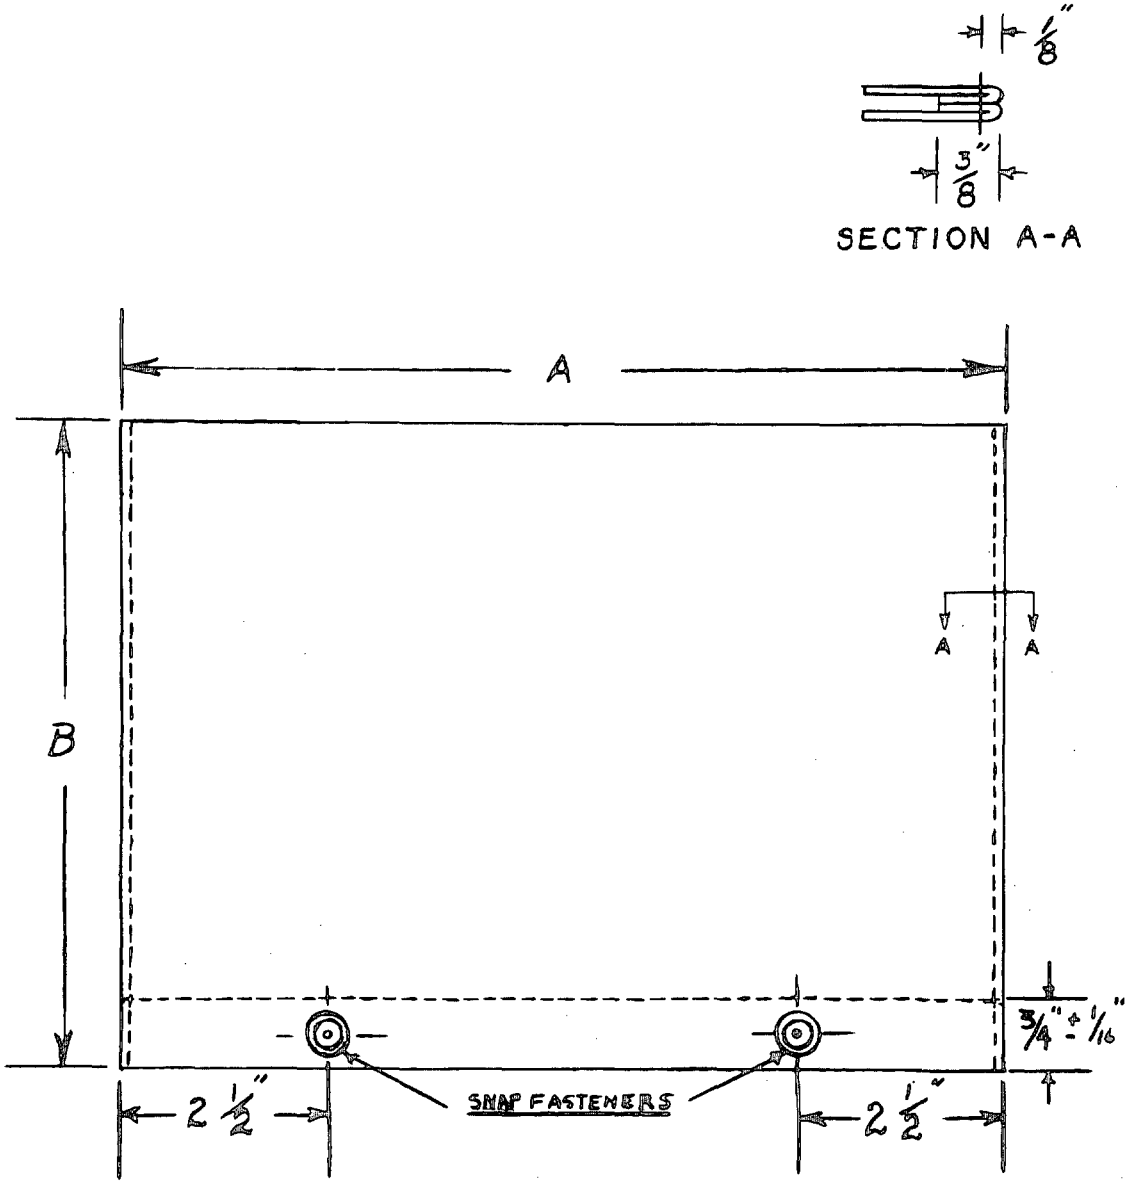


FIGURE 1. COVER AUTOMOBILE DISTINGUISHING PLATE COMMANDANT AND GENERAL OFFICERS (U.S.M.C.)

M.C.S.A.
826.R.G.F.
8 Jun '66

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Penna. 19146

OFFICIAL BUSINESS

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:40Z
Check the source to verify that this is the current version before use.