INCH POUND

MIL-C-21082B(MC)
14 March 1990
SUPERSEDING
MIL-C-21082A(MC)
8 June 1966

MILITARY SPECIFICATION

COVERS, AUTOMOBILE DISTINGUISHING PLATE COMMANDANT AND GENERAL OFFICERS (USMC)

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for cotton duck covers for the automobile distinguishing plate used by the Commandant and General Officers of the Marine Corps.

1.2 Classification. The covers shall be of one type and two sizes, as specified (see 6.2):

Size 1 - 11 inches wide by 9 inches high (CMC)
Size 2 - 10 1/4 inches wide by 7 1/2 inches high (General Officers)

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development and Acquisition Command, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC- N/A FSC 8345

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered
CCC-D-950	- Dyeing and Aftertreating Processes For Cotton Cloths
DDD-L-20	- Label, For Clothing, Equipage and Tentage (General Use)

MILITARY

MIL-F-10884	- Fasteners, Snap
MIL-P-19611	- Plate, Automobile, Individual, Metal; Emblem and Star (Commandant's and General's, USMC)

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MS-27981	- Fasteners, Snap, Style 2A (Small Wire Spring Clamp Type)

(Unless otherwise indicated, copies of federal and military specifications, standards and handbooks are available from the Naval Publications and Forms Center (Attn: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents and publications. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Application for copies of the Manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Non-Government Publications. The following documents(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in DoDISS are the issues of the documents cited in the solicitation (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N. W. Washington, D. C. 20036.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this document shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the standard sample in which case the specification shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection and approval (see 4.4 and 6.3).

3.3 Material

3.3.1 Cloth, cotton duck. The cloth, before finishing, shall be 9.85 ounces per square yard, conforming to type III of CCC-C-419.

3.3.1.1 Color and treatment. The cotton duck shall be dyed olive drab 7 and shall be water-repellent and mildew-resistant after treated in accordance with type I, class B of CCC-D-950.

3.3.2 Thread, polyester. The thread shall conform to type I or II, class 1, sub-class A or B, size F of V-T-285.

3.3.2.1 Color and colorfastness. The thread shall be dyed olive drab shade S-1, cable No. 66022. The dyed thread shall show colorfastness to weathering, equal to or better than the standard sample when tested as specified in V-T-285.

When no standard sample is available, the dyed thread shall show good fastness to weathering when tested as specified in V-T-285.

3.3.3 Snap fasteners. The snap fasteners shall be brass, black finish, conforming to style 2A, finish 2, construction A of MIL-F-10884 and MS-27981, except the button shall consist of the eyelet only, no shell or reinforcement required; the eyelets shall be size 1, part No. 5b. The fastener components shall consist of an eyelet, socket, stud and eyelet.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:39Z
Check the source to verify that this is the currentversion before use.

3.3.4 Label. Each cover shall have an identification label conforming to type I, class 1 of DDD-L-20. The label shall be approximately 2 inches wide and 3 inches long and inserted inside the finished cover. The content and format shall be as follows:

Nomenclature:	Cover, Automobile Plate
Contract Number:	DLA100-89-C-0000 (Example)
Name of contractor:	
Stock Number:	8345-00-508-1440 (size 1) or 8345-00-508-1441 (size 2)

3.4 Design. The cover shall be as shown in Figure 1, consisting of a single piece of cotton duck folded and seamed to specified size and shape and the open end hemmed and provided with snap fasteners.

3.5 Patterns. The standard pattern furnished by the Government shall not be altered in any manner and shall be used only as a guide for cutting working patterns. The standard patterns provide 3/8 inch seam allowance.

3.5.1 List of pattern parts. Covers shall be cut from the specified material in accordance with pattern parts indicated:

Item	Pattern nomenclature Material: Cloth, cotton duck	No. of cut parts
1.	Body piece	1

3.6 Construction

3.6.1 Manufacturing requirements. The covers shall be manufactured in strict accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The contractor is not required to follow the exact sequence of operations as listed in Table I but all operations specified shall be used to manufacture the cover.

3.6.1.2 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when caught in other seams or stitching, shall be securely backtacked not less than 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting a. Cut covers in strict accordance with patterns furnished by the Government. b. Cut material in the direction indicated by directional lines on pattern.					
2.	Hem ends a. Hem both ends of the duck 3/4 + 1/16 inch with raw edges turned under not less than 3/8 inch and stitch 1/8 inch from edge.	301	EFb-1	8-10	F	F
3.	Attach snap fasteners a. Securely clinch snap fastener socket and eyelets (female) through one hem and stud and eyelets (male) through other hem to properly engage with each other. The snap fasteners shall be centered on the hems and positioned as shown in Figure 1.					
4.	Seam sides a. Fold the duck end to end and seam sides 1/8 inch from edge.	301	SSc-1	8-10	F	F
5.	Label a. Place individual label in each side cover.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished measurements shall conform to the measurements specified in Table II and Figure 1. Letters A and B in Table II refer to location of measurement shown in Figure 1.

Table II - Finished measurements

Size	Width (A) inches	Height (B) inches
1	11	9
2	10 1/4	7 1/2
Tolerance	±1/4	±1/4

3.8 Workmanship. The finished cover shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4)
2. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

4.4 First article inspections. When a first article is required (see 3.2 and 6.3), it shall be examined for the defects specified in 4.5.3.1 and 4.5.3.2. The presence of any defect may be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of reference specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. The method of testing specified in FED-STD-191, wherever applicable. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

4.5.2 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are accomplished as specified herein. The Government reserves the right to exclude from consideration for acceptance any material for which in-process inspection has indicated nonconformance.

4.5.3 Examination of end item. The defects found during examination shall be classified in accordance with the lists shown in 4.5.3.1 and 4.5.3.2. The sample unit for these examinations shall be one cover. The inspection level shall be II (see 6.5).

4.5.3.1 General defects. General defects shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Fabric	Cuts, tears or holes.	101		
	Any smash, weak place, broken or missing yarns, multiple floats or open places.	102		
	Any shade bar or fine or coarse filling bar.		201	
Snap fasteners	Size or type not as specified.	103		
	Not securely set, i.e., loosely clinched permitting rotation or separation of sockets and stud-eyelet combination. Excessively clinched cutting fabric.	104		
	Broken or malformed; corroded areas; burrs or sharp edges which may cause injury in handling.	105		
	Finish omitted or not as specified.		202	
Location of snap fasteners	Snap fasteners misplaced; seriously affecting appearance or serviceability.	106		
Seams and stitching				
Open seams	1/4 inch or more, but not more than 1/2 inch.		203	
	More than 1/2 inch.	107		
Note: A seam shall be classified as open when one or more stitches joining a seam are broken, or when 2 more more continuous skipped stitches or run-offs occur.				
Run-offs (see open seams)				
Raw edges	More than 1/2 inch when securely caught in stitching.		204	
Note: Raw edges not securely caught in stitching shall be classified as open seams.				

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Seam and stitch type	Wrong seam or stitch type: -seriously affecting serviceability.	108		
	-affecting serviceability but not seriously.			301
Stitch tension	Loose, resulting in loosely exposed bobbin or top thread; tight, resulting in tightness of fabric on seams.			302
Stitches per inch	One stitch less than minimum specified.			303
	Two or more stitches less than minimum specified.		205	
	One or more stitches in excess of maximum specified.			304
Stitching margins	Over specified tolerance by more than 1/4 inch.	109		
	Under specified tolerance.			305
Stitching ends	Not backstitched, or backstitched less than 1/2 inch (except where held down by other stitching or turned under).			306
Thread breaks	Backstitched less than 1 inch.			307
Note: Thread breaks not backstitched shall be classified as open seams.				
Stitching	Any required rows of stitching omitted.	110		
Needle chews	Needle chews expected to develop into holes.	111		
Repairs	Mends, darns or patches.	112		
Hems	Twisted or pleated.		206	
	Less than specified width by more than 1/4 inch.			308
Cleanness	Grease or oil stains.	113		
	Thread ends not trimmed.			309

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT	CLASSIFICATION		
		MAJOR	MINOR	
			A	B
Construction	Any required detail of construction omitted or not as specified: -seriously affecting serviceability. -affecting serviceability, but not seriously.	114		310
4.5.3.2 Examination of covers for dimensions. Covers shall be examined for dimensional defects as listed below. The inspection level shall be S-4 (see 6.5).				
Overall dimensions	Smaller than specified dimensions less than applicable minus tolerances indicated in Table II.	115		
	Larger than specified dimensions and applicable plus tolerance indicated in Table II.		207	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Packaging. Packaging shall be commercial.

5.1.1 Commercial. The covers shall be packaged in accordance with the manufacturer's normal practice.

5.2 Packing. Packing shall be commercial.

5.2.1 Commercial. Covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

5.3.1 Nomenclature. The item identification nomenclature shall be marked as follows on all containers.

Size 1: COVER, AUTOMOBILE DISTINGUISHING, PLATE, CMC
Size 2: COVER, AUTOMOBILE DISTINGUISHING, PLATE, GENERAL OFFICERS

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended use. The covers are intended for use on automobile distinguishing plates conforming to MIL-P-19611(MC).

6.2 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When first article is required and the number of units for the first article (see 3.2).
(d) Acceptance criteria required (see 6.4).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 6.5 for total (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 10 is recommended.

6.6 Key word listing.

Emblem
Metal
Star

6.7 Changes from previous issue. Marginal notations are not used in this revisions to identify changes with respect to the previous issue due to the extensiveness of the changes.

Preparing Activity
Navy - MC
Project No. 8345-N178

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

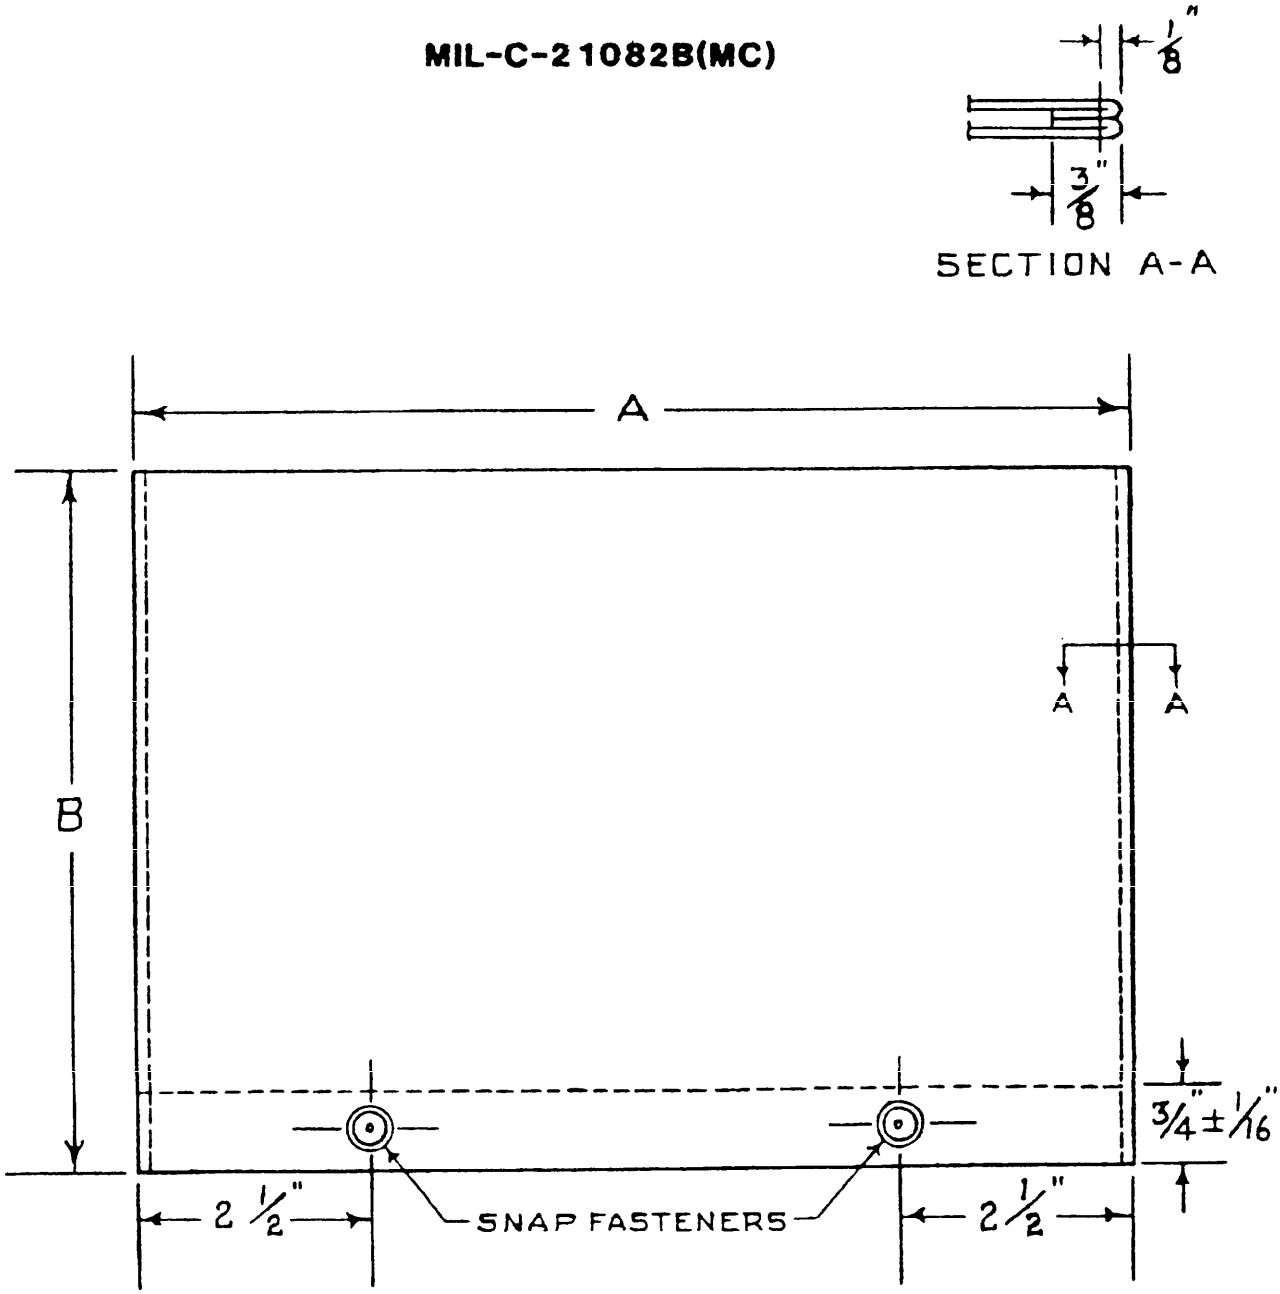


FIGURE 1. COVER AUTOMOBILE DISTINGUISHING PLATE COMMANDANT AND GENERAL OFFICERS (U.S.M.C.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-C-21082B(MC)	90/03/14

3. DOCUMENT TITLE
COVERS, AUTOMOBILE DISTINGUISHING PLATE, COMMANDANT AND GENERAL OFFICERS (USMC)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial: (2) AUTOVON: (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
Commanding General, Marine Corps Research, Development and Acquisition Command (PSE-C)	(202) 696-1186/87/88	226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, D. C. 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil - Downloaded: 2024-10-19T08:39Z
Check the source to verify that this is the current version before use.