MIL-C-21083B(MC)
29 January 1973
SUPERSEDING
MIL-C-21083A(MC)
12 September 1966

MILITARY SPECIFICATION

COAT, MAN'S: SERVICE, SUMMER AND WINTER, OFFICER'S, USMC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for summer and winter wool service coats, with belt.

*1.2 Classification. The coats shall be of one type in the following classes and sizes, as specified (see 6.2):

Class 1 - Coat, Service, Summer, Wool, Khaki
Class 2 - Coat, Service, Winter, Wool, Green

Schedule of sizes

Short	Regular	Long	Extra Long
36	36	36	36
38	38	38	38
40	40	40	40
42	42	42	42
	44	44	44
	46	46	

1.3 Individual orders. When coats are custom tailored to an individual order, this specification shall govern, except the detail requirements of Section 3, Table I, may be modified to the extent necessary for good custom tailoring practice.

2. APPLICABLE DOCUMENTS

*2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	- Button, Sewing Hole, And Button, Staple, (Plastic).
V-T-276	- Thread, Cotton.
V-T-280	- Thread, Cotton Gimp, Buttonhole.
V-T-301	- Thread, Silk.
UU-P-268	- Paper, Kraft, Untreated, Wrapping.
CCC-C-438	- Cloth, Buckram, Cotton.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use).
DDD-T-86	- Tape, Textile, Cotton, General Purpose, (Unbleached, Bleached Or Dyed).

MILITARY

MIL-C-326	- Cloth, Silesia, Cotton.
MIL-C-368	- Cloth, Satin, Rayon And Cloth, Twill, Rayon.
MIL-F-495	- Finish, Chemical, Black, For Copper Alloys.
MIL-B-3461	- Buttons, Insignia, Metal, Uniform And Cap.
MIL-C-10176	- Cloth, Gabardine; Wool, Polyester And Wool.
MIL-C-15062	- Cloth, Flannel, Wool, Undercollar Cloth.
MIL-P-15064	- Pad, Shoulder And Sleeve-Head.
MIL-C-15065	- Coat, Front.
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes).
MIL-B-20289	- Button, Insignia, Plastic.
MIL-C-43718	- Cloth, Twill, Polyester And Cotton.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitch, Seam, And Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment And Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

*2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

3. REQUIREMENTS

*3.1 Samples. Samples are furnished solely for guidance and information to the supplier (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified (see 6.2), before production is commenced, the first article, consisting of the number of finished coats specified by the procuring activity (see 6.2) shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

*3.3.1 Basic material. The basic material for class 1 and class 2 coats shall be cloth, wool, gabardine or, if specified (see 6.2 and 6.3), shall be other cloth of adopted standard. The wool gabardine cloth for each class coat shall be as follows:

(a) Class 1 - MIL-C-10176, type I, class 3, 11-ounce, khaki 2104 (see 6.3).

(b) Class 2 - MIL-C-10176, type I, class 5, 14.5-ounce, green 2210 (see 6.3).

*3.3.2 Lining. The material for lining the coat, standard belt, pocket flaps, buttonhole tab for sword slit (class 2 coats only) and vent; for making the belt fastener; and for the facing of the inside pocket shall be cloth, rayon, twill, 3.7-ounce, conforming to class 1 of MIL-C-368. The color of the cloth shall be khaki shade 2102 for class 1 coats and green shade 2208 for class 2 coats (see 6.3).

*3.3.3 Undercollar cloth. The undercollar cloth shall be wool flannel conforming to MIL-C-15062. The color of the cloth shall be khaki for class 1 coats and green for class 2 coats, of an approved shade to closely match the basic material of the respective coats (see 6.3). The requirement for pH and colorfastness to perspiration and crocking shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

3.3.4 Sword slit patch. The sword slit patch shall be made of the material specified in 3.3.3.

*3.3.5 Sword slit buttonhole tab. The sword slit buttonhole tab shall be made of one ply of the basic material and one ply of the rayon lining material for class 2 coats and two plies of basic material for class 1 coats.

*3.3.6 Bias binding. The binding for the upper edge of the front pockets, the back edge of the facings, the raw edge of the bottom turnup, and the raw edge of seam allowances shall be bias cut out of the lining material specified in 3.3.2. The bias binding for the seams, facings and bottom turnup shall be 3/4 inch wide, and for the top edge of pockets shall be 1-1/8 inches wide. The binding shall have sized edges.

*3.3.7 Silesia or polyester and cotton. The material for lining the upper front pocket; making the inside breast pocket; stay pieces for the front pockets; stays for the armhole and shoulder seam, and the lower edge of armhole; inside pocket support; and the reinforcement pieces for the upper front pocket snap fasteners shall be cloth, cotton, silesia, 5-ounce, conforming to type I of MIL-C-326, or polyester and cotton conforming to type I of MIL-C-43718. The color of the cloth shall be khaki shade M1 for class 1 coats and black for class 2 coats (see 6.3). The requirements for nonfibrous material, seam efficiency, and colorfastness to light shall not apply.

*3.3.8 Collar and belt interlining. The material for interlining the collar and standard belt shall be cloth, buckram, cotton, natural color, conforming to type I, class 2 of CCC-C-438 except that the test for shrinkage shall be in accordance with method 5580 of FED-STD-191.

*3.3.9 Shoulder pads. The shoulder pads shall conform to type I, class 2 of MIL-P-15064.

3.3.10 Sleeve head pad. The sleeve head pad shall conform to type IV of MIL-P-15064.

3.3.11 Coat fronts. The coat fronts shall conform to MIL-C-15065, type IX for class 1 coats and type X for class 2 coats.

*3.3.12 Tape. The tapes shall be cotton conforming to DDD-T-86 as follows. The requirement for nonfibrous material shall not apply.

*3.3.12.1 Stay tape. The stay tape shall conform to type III, class 2 of DDD-T-86, 3/8 inch wide for the front edges of coats and 1/4 inch wide for the armholes, back vent and waist seam.

*3.3.12.2 Bridle tape. The bridle tape for the breakline of lapel shall be 5/8 inch wide, conforming to type II, class 1 of DDD-T-86.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

*3.3.13 Hanger braid. The braid for the coat hanger shall be cotton or rayon, tubular, flat, 1/8 to 3/16 inch wide, and shall have a breaking strength of not less than 75 pounds in the warp direction, when tested as specified in Section 4, Table IV. The color of the braid shall closely match shade P-1, cable No. 66019, for class 1 coats and shade T-1, cable No. 66023 for class 2 coats. The braid shall show good fastness to crocking and wet (dry) cleaning. The hanger when tested as specified in Section 4, Table IV, shall comply with the requirements specified herein.

3.3.14 Thread.

*3.3.14.1 Silk thread. The silk thread shall conform to V-T-301 as follows:

Use	Type	Class	Size	Ply
Machine Sewing:				
Outside seaming and stitching	1		A	3
Front, shoulder strap and pocket flap buttonholes:				
Needle			B	3
Bobbin on looper			F	3
Machine felling			O	
Hand sewing	III	3	C	2

*3.3.14.2 Cotton thread. The cotton thread shall conform to V-T-276 as follows:

Use	Type	Ticket No.	Ply
All inside seaming and stitching	IC2 (mercerized finish)	A	3
Belt, belt fastener and sword slit tab buttonholes	IA3 or IB3		
Sewing on buttons		20	4
Machine tacking armholes	IA1 or IA2	30	3

The thread for basting shall be a good commercial grade.

3.3.14.3 Color and colorfastness. The cotton and silk thread, except basting thread and thread for machine tacking armholes which may be white, shall be dyed shade P-1, cable No. 66019, for class 1 coats, and shade T-1, cable No. 66023, for class 2 coats. The dyed threads shall show good fastness to wet (dry) cleaning and, in addition, the silk thread shall show good fastness to light when tested as specified in the applicable thread specification.

*3.3.15 Gimp. The buttonhole gimp shall be cotton, No. 8, soft or glazed finish, conforming to type I and II of V-T-280 and shall show good colorfastness to wet (dry) cleaning. The color shall be shade P-1, cable No. 66019 for class 1 coats and shade T-1, cable No. 66023 for class 2 coats.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

3.3.16 Buttons.

*3.3.16.1 Insignia buttons. The insignia buttons for class 1 and 2 coats shall conform to type I, 40-line, and type II, 27-line, black finish, conforming to MIL-B-20289.

3.3.16.2 Ring toggles. Ring toggles for attaching insignia buttons to coats shall conform to MIL-B-3461.

*3.3.16.3 Sewing hole buttons. The sewing buttons shall be melamine formaldehyde composition, glossy finish, conforming to type II, class D, style 20, 34-line and style 4, 22-line of V-B-871. The color of the buttons shall be khaki, cable No. 62026, for class 1 coats and green, cable No. 62017, for class 2 coats.

*3.3.17 Fastener, snap. The snap fasteners for the belt, upper pockets and flaps shall be brass, black japanned finish or black chemical finish in accordance with MIL-F-495, round or square style, rolled edge, size 1/0, sew-on type. The snap fastener, when tested as specified in Section 4, Table IV, shall comply with the requirements specified herein.

*3.3.18 Labels. Each coat shall have an identification label and a size label as follows. The coats are intended to be dry cleaned and the labels shall show fastness to dry cleaning.

*3.3.18.1 Identification label. The identification label shall conform to type I, class 1 of DDD-L-20. The content and format shall be as follows:

Nomenclature
Contract number
Name of contractor
Wool Products Act information

*3.3.18.2 Size label. The size label shall conform to type I, class 2, of DDD-L-20. The label shall consist of the numberical size designation specified in 1.2 followed by the letters S, R, L, or XL for Short, Regular, Long and Extra Long and the stock number as shown by the following example.

$$\frac{40R}{\text{Stock number}}$$

The stock number may be incorporated in the identification label instead of in the size label.

*3.4 Design. The coat shall be the U. S. Marine Corps design shown on Figures 1 through 4, a four-button, single-breasted, quarter-lined coat with separate belt, having a skirt type front with side body pieces, waist seam and waist darts, upper patch pockets and lower bellows pockets with worked eyelets for detachable insignia buttons and with flaps to button, a two-piece back with lined vent, ornamental sleeve cuffs, one inside breast pocket with horizontal piped opening, shoulder straps to button, and a roll collar with worked eyelets and notched lapels. Coats shall have a sword slit in waist seam at left side with a lined tab on inside to button.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

*3.5 Patterns. Standard patterns will be furnished to the supplier by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the supplier's working patterns. The supplier's working patterns shall be identical to the standard patterns. The standard patterns provide 3/16-inch allowance for seams at the edges of the lapels, front edges of coat, and for pocket flap and shoulder strap seams; 3/4-inch allowance for side seam; 5/8-inch allowance for center back seam and 3/8-inch allowance for all other seams, except as otherwise specified in Table I. Standard patterns show size and are marked and notched for proper cutting, placement, and assembly of component parts.

* 3.5.1 List of pattern parts. Coats shall be cut from the materials specified herein in accordance with the number of pattern parts indicated below:

Item	Pattern nomenclature	No. of cut parts
	Material: Basic	
1.	Front (upper)	2
2.	Skirt (lower front)	2
3.	Side body	2
4.	Right facing	1
5.	Left facing	1
6.	Back	2
7.	Top sleeve	2
8.	Under sleeve	2
9.	Sleeve cuff	2
10.	Top collar	1
11.	Shoulder strap; top ply	2
12.	Shoulder strap; under ply	2
13.	Pocket, upper	2
14.	Pocket, lower	2
15.	Pocket flap, upper	2
16.	Pocket flap, lower	2
17.	Belt (standard or optional)	1
18.	Sword slit tab (Class 2)	1
19.	Sword slit tab (Class 1)	2
20.	Pocket flap, upper (under-ply class 1)	2
21.	Pocket flap, lower (under-ply class 1)	2
	Material: Cloth, rayon lining	
22.	Front	2
23.	Yoke	1
24.	Top sleeve	2
25.	Under sleeve	2
26.	Pocket flap, upper (Class 2)	2
27.	Pocket flap, lower (Class 2)	2
28.	Vent lining	1
29.	Sword slit tab lining (Class 2)	1
30.	Inside breast pocket facing	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Item	Pattern nomenclature	No. of cut parts
	Material: Silesia or polyester and cotton	
31.	Inside breast pocket	1
32.	Inside breast pocket stay	1
33.	Stay, snap fastener (Class 2)	4
34.	Stay, upper pocket	2
35.	Stay, lower pocket	2
36.	Lining, upper pocket, (optional construction)	2
37.	Lining, lower pocket (Class 1)	1
	Material: Cloth, cotton, buckram	
38.	Collar interlining	1 or 2
39.	Belt interlining (standard belt)	1
	Material: Cloth, wool, flannel	
	Undercollar	1 or 2
40.	Sword slit patch	1
41.		
	Shapers	
	Working lapel shaper	
	Finished collar and lapel shaper	
	Undercollar shaper	
	Finished pocket shaper, upper	
	Finished pocket shaper, lower	
	Finished pocket flap shaper, upper	
	Finished pocket flap shaper, lower	
	Left vent shaper	
	Marker	
	Sleeve cuff marker	
	Undercollar stand marker	
	Inside breast pocket marker	

3.6 Construction.

3.6.1 Manufacturing requirements. The coats shall be manufactured in accordance with the operations and the stitch, seam and stitching types specified in Table I.

3.6.1.1 Operations. The supplier is not required to follow the exact sequence of the operations as listed in Table I but all operations specified shall be used to manufacture the coats.

*3.6.1.2 Stitches, seams, and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. The number of stitches per inch as specified in Table I indicates minimum and maximum number permitted. All overedge stitching shall be done on serging machines with a knife attachment properly set to trim the raveled edge without cutting the material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

3.6.1.2.1 Tacking and backstitching. Ends of seams and stitching produced with 301 stitch type, when not caught in other seams or stitchings, shall be backtacked not less than 1/4 inch; thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch.

*3.6.1.3 Shade marking. The component parts of the coat cut from one piece of basic material and lining material, including pairs of sleeve linings when cut from ends, and the two parts of the undercollar cut from undercollar cloth shall be shade marked to insure a uniform shade and size throughout the garment. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Adhesive type tickets which show discoloration or the use of an adhesive mass which adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. a. Cut coats in strict accordance with patterns furnished by the Government. b. Cut all materials in the direction indicated by the directional lines on the patterns. c. Cut all wool parts of the coat including belts from one piece of basic material, except the following parts may be cut from ends, but when so cut the parts shall harmonize with the shade of the coat: under ply of shoulder straps, sword slit buttonhole tab, belt loops and belt keeper. Belt loops and belt keeper may be banded 1 inch wide. The sword slit patch cut from undercollar cloth shall be 3 inches square. d. Cut fronts, yoke and vent lining parts of the coat and facing for inside pocket from one piece of rayon lining material. All other rayon lining parts may be cut from ends. When pairs of sleeve linings are cut from ends, the shade of the linings shall match each other. The standard belt lining shall be cut 2-1/4 inches wide, and the belt fastener shall be cut 1-5/8 inches wide. Bias binding shall be cut 5/8 to 7/8 inch wide. e. The two parts of the undercollar cut from undercollar material shall match each other, or cut the undercollar material in one piece in lieu of two parts.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
1.	Cutting. (cont'd) f. Cut cotton silesia or polyester and cotton stays on the bias, 3/4 inch wide, 4 ±1/4 inches long for front shoulder and armhole edge. Cut silesia or polyester and cotton for inside pocket and the stays for upper and lower pockets, inside pocket, and snap fastener on the straight in accordance with the pattern furnished. Cut silesia on polyester and cotton for (optional construction) upper pockets in accordance with the patterns furnished. g. Cut the cotton interlining cloth for collar on the bias in accordance with the pattern furnished. Cut the cotton interlining cloth for the belt on the straight, 1-5/8 inches wide. h. Dress the left vent in accordance with the shaper furnished. i. The use of drill holes is prohibited. j. The left front shall be dressed in the front shaping operation only (see opn. 49).					
2.	Replacement of damaged parts. a. Replace at time of cutting any parts of the coat containing holes or serious weakening defects such as smashes, multiple floats, loose weakening slubs, etc., expected to develop into holes, shade bars and dye streaks or unsightly slubs, etc., affecting appearance.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
2.	Replacement of damaged parts. (cont'd) b. Replace any parts damaged during the manufacturing process by needle chews which may develop into a hole, scissor or knife cuts, tears, holes, mends or burns in the material, affecting appearance.					
3.	Shade marking. a. Mark or ticket (see 3.6.1.3) all component parts cut from one piece of basic material, and the two parts of the undercollar to insure uniform shade and size throughout the coat. All lining parts shall be marked bundled or ticketed to insure uniform shade and size throughout the garment. b. The use of tickets with any metal fastening devices or sew-on shade tickets is prohibited on the rayon lining.					
4.	Make belt loops and keeper. Finished appearance. The belt loops and keeper shall be uniformly stitched, uniform in width and shall finish smooth and flat without pleats, gathers, puckers or other distortion. a. The belt loops and keeper shall be made from a 1-inch-wide strip of basic material. b. Fold the sides of the strip lengthwise towards the center, abutting the raw edges, and join the raw edges together with a covering stitch to finish 1/2 inch wide. The stitching shall be uniformly 1/8 inch from finished edges of the loops and keeper.	406	EFh-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
4.	Make belt loops and keeper. (cont'd)					
	c. Cut the loop for the left and right sides of the coat 5-1/2 inches and 3-1/2 inches long, respectively.					
	d. Cut the keeper 4-1/2 inches long, fold in half end to end, and join the ends with a bartack across the width of the keeper. The finished keeper shall measure 2-1/8 ±1/8 inches from bartack to the folded end.	Bar-tack		28 per bartack (minimum)	A	A
5.	Make belt fastener (standard belt - see Figure 5).					
	Finished appearance. The belt fastener shall be uniformly stitched, uniform in width and shall finish smooth and flat without pleats, gathers, puckers or other distortion. The buttonhole shall be clean cut, well made and correctly positioned. The buttonhole shall be the straight type and shall be made to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the outside of the fastener and the ends of the buttonhole shall be securely tacked.					
	a. The belt fastener shall be made from 1-5/8-inch-wide strip of rayon lining material.					
	b. Fold the strip in half lengthwise, turn in the raw edges, and stitch 1/8 inch from each side, catching the turned edges in the stitching, to form a 1/2-to 5/8-inch-wide band. Cut the fastener 6-1/2 inches long.	301	EFp-2	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
5.	Make belt fastener (standard belt - see Figure 5). (cont'd)					
	c. Turn under one end of the fastener 1-1/2 inches and make a horizontal straight type buttonhole, cut 5/8 inch long, through the center of the turned under portion, securely tacking each end of buttonhole.	But-ton-hole		42 to 48 per button-hole (minimum) (including tack)	A	A
6.	Make standard belt.					
	Finished appearance. The belt shall be uniformly stitched and shall finish smooth and flat without twists, pleats, puckers or raw edges. The pointed end of the belt shall be well formed with the turned in edges securely caught in the stitching. The buttonhole shall be clean cut and well made.					
	a. The standard belt shall be made of one piece of basic material, lined with rayon lining and interlined with buckram.					
	b. Place the interlining material between the basic and lining materials and seam together uniformly 1/8 inch from upper and lower edges, with the raw edges of lining and basic material turned in and caught in the stitching. The stitching shall extend from one end of belt to approximately 1-1/4 inches from the opposite end. The lining shall be 1/16 inch back from the finished edge of the belt.	301		12-16	A (silk)	A
	c. Turn the lining and basic materials back at the top and bottom unseamed edges of the belt and trim the interlining approximately 1-1/4 inches back from the end.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Make standard belt. (cont'd)					
	d. Fold the end of the basic material in half lengthwise to the outside, and stitch across the width of the basic material 1/8 inch from the end.	301	SSa-1	12-16	A (silk) or A	A A
	e. Turn the end of the belt, working out the point. Turn under the upper and lower edges of the lining, and seam the lining to the belt 1/8 inch from the folded edges of the belt, closing the end and forming a point at the center of the finished end.	301	SSc-1	12-16	A (silk)	A
	f. Close the opposite end of the belt with serge stitching.	502 or 503	EFd-1	10-14	A	A
			EFd-1	10-14	A	A
	g. The finished width of the belt shall be 1-3/4 ±1/16, -1/8 inches. The finished length of the belt for each size coat shall be as shown in Table II.					
	h. Make a horizontal, straight type buttonhole, cut 5/8 inch long, midway between upper and lower finish edges of the belt to fit a 22-line sewing hole button, with the center of the buttonhole 1 ±1/8 inch from the buckle end, and with both ends of buttonhole securely tacked. The purling of the buttonhole shall be on the outside of the belt.	But-ton hole		50 per button-hole (includ-ing tack)	A	A
	i. Mark location for sewing two 22-line sewing hole buttons to lining side of belt. The center of the button for the buckle end shall be 3-5/8 ±1/8					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
6.	Make standard belt. (cont'd)					
	inches from the overedge stitched end of belt. The button for the belt fastener shall be positioned in accordance with mark on pattern for each size belt. The buttons shall be securely sewn to the belt with the end of the stitching securely tacked.					
	j. Securely sew one button at each mark. The button for the buckle end shall properly engage buttonhole in buckle end and shall be sewn through all plies of material. The button for the belt fastener shall be sewn through the lining and interlining, only.	101		21 per button (minimum) 3-4 (double thread)	20/4	
	k. Mark location for sewing belt fastener to lining side of belt, in accordance with mark on pattern for each size belt.					
	l. Turn under the raw end of the fastener 1/2 inch and bartack the fastener to the belt through all plies 1/8 to 3/16 inch from the folded edge. The bartack shall be across the entire width of the fastener and shall be finely stitched in order to not have an objectionable appearance on the outside of the belt. The fastener, when buttoned, shall be smooth and flat without twisting or bulging.	Bar-tack		28 per bartack	A	A (silk)
	m. Clean and press belt as specified in operations 7.k and 7.l.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make optional one piece belt (see Figure 6). Finished appearance. The belt shall finish smooth and flat without twists, pleats, puckers or raw edges. The pointed end of the belt shall be well formed. The buttonhole shall be clean cut and well made. The ends of the buttonhole shall be securely tacked. a. The optional belt shall be made of one piece of basic material.					
	b. Fold the piece in half lengthwise forming two plies. Join the two plies together with a 3/8-inch seam. c. Spread open the seam and press the belt smooth and flat with a heated pressing iron.	301	SSa-1	12-16	A	A
	d. Close the pointed end of the belt with a 1/4 inch seam along the slanted edges. e. Evenly trim the pointed end of the belt for proper turning. Turn the belt through the open end, completely working out the point.	301	SSe-2 (a)	12-16	A	A
	f. Topstitch the belt uniformly 1/8 inch from top and bottom folded edges and seamed end, turning in the square end of the belt 1/4 inch and catching the turned-in portion in the stitching. The seam of the belt shall finish off center.	301	OSf-1 (top and bottom edges) SSe-1 (b) SSc-1 (square end)	12-16	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make optional one piece belt (see Figure 6). (cont'd)					
	g. The finished width of the belt shall be 1-3/4 +1/16, -1/8 inches. The finished length of the belt for each size coat shall be as shown in Table II.					
	h. Make a horizontal eyelet-end taper-bar type buttonhole, cut 5/8 inch long, in the center seam of the belt. The inside edge of the eyelet-end of the buttonhole shall be 1/2 to 5/8 inch from the buckle end of belt. The buttonhole shall be well worked over gimp to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the outside of the belt. Care shall be exercised in making the buttonhole so that center seam of belt will not open beyond ends of buttonhole.	Buttonhole		60 per buttonhole (including tack)	B (silk)	F
	i. Mark the location for sewing one 22-line sewing hole button to the underside of the belt. The button shall be sewn to the belt with the end of the stitching securely tacked.					
	j. Securely sew the button at the mark on the belt to properly engage buttonhole in buckle end. On the finished belt, the button shall be 3-5/8 ±1/8 inches from square end of belt.	Hand		6 per button (double thread)	20/4	
	k. Trim the ends of the stitching and remove all loose ends of thread from the belt. Remove all spots and stains from the belt without injury to the material.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
7.	Make optional one-piece belt (see Figure 6). (cont'd)					
	1. Place the belt keeper on the belt at the square end and secure by buttoning the end. Press the belt smooth and flat with a heated pressing iron or pressing machine. Ends of the keeper shall be spread open and pressed flat on the underside at the center of the belt.					
8.	Attach snap fasteners (see Figure 5).					
	Finished appearance. The snap fasteners shall be securely attached to the standard belt. On the finished coat, the belt ends shall be fastened without misalignment or gap. The stitching on the socket part of the snap shall not catch the outer part of the belt. When sewn by hand, the stud part of the snap fastener shall be stitched through outer ply of material and interlining.					
	a. Sew the socket part of the snap fastener to the inside point of the standard belt 1/2 to 5/8 inch from the point. The stitching shall be tacked off with not less than two stitches.	Hand or 101		3-4 (double thread) 21 per fastener (minimum)	A A	
	b. Sew the stud part of the snap fastener 3-1/2 to 3-3/4 inches from the folded end of belt on the outside. The stitching shall be tacked off with not less than two stitches.	Hand or 101		3-4 (double thread) 21 per fastener (minimum)	A A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Make upper and lower pocket flaps. Finished appearance. The pocket flaps shall be uniformly stitched and shall finish smooth and flat, without twists, gathers, puckers, pleats or raw edges and shall be uniform in shape and size in accordance with the finished pocket flap shaper. The seamed edges, the corners and points of the flaps shall be well worked out and the lining shall not be visible on the outside of the flaps. The buttonholes shall be clean cut, well made, properly positioned,well worked over gimp to fit a 27-line insignia button, and the stitching shall be securely caught in the basic material. The gimp shall be pulled through to the underside of the buttonholes and the purling of the buttonholes shall be on the outside of the flaps. The buttonholes shall be the cut first type. a. The pocket flaps shall be made with one ply of basic material lined with rayon lining for class 2 coats and two plies of basic material for class 1 coats. b. Securely sew the stud part of the snap fastener to the lower corners of the lining for the upper pocket flaps, through a small triangular shaped silesia stay piece. On the finished flap, the fastener shall be midway between the side and bottom finished edges and 3/8 to 1/2 inch back from the corners. When stud part is sewn by hand, the stitching shall be tacked off with not less than two stitches.	101 or 301 or Hand		21 per fastener (minimum) 16 per fastener (minimum) 3-4 (double thread) (not including tack)	A A C (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
9.	Make upper and lower pocket flaps. (cont'd) NOTE: Stays for snap fasteners apply for class 2 coats only.					
	c. Seam the lining to the basic material 3/16 inch from the side and bottom edges, evenly trimming the edges for proper turning.	301	SSe-2 (a)	10-14	A or A (silk)	A or A (silk)
	d. Turn the flaps, working the edges, corners and points out completely. Topstitch the flaps uniformly 1/8 inch from seamed edges, working the lining back 1/16 inch from the finished edges of the flaps.	301	SSe-2 (b)	12-16	A or A (silk)	A or A (silk)
	e. Press the flaps smooth and flat with a heated pressing iron or pressing machine.					
	f. Mark and trim top edge of flaps so that in the finished coats the length of the flaps at center point and sides shall conform to measurements shown in Table III.					
	g. Join the raw edge of the lining and flap together with overedge stitching.	504 or 505	EFd-1 EFd-1	8-10 8-10	A A	A A
	h. Make a vertical eyelet-end square-bar type buttonhole, cut 3/4 inch long, through the center of each pocket flap, with the inside edge of the eyelet 5/8 ±1/8 inch above the center point.	But-ton hole		38 per button-hole (minimum) (not in-cluding bartack)	B (silk)	F
	i. Securely bartack the end of buttonholes, and trim the ends of the gimp.	Bar-tack		21 per bartack (minimum)	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
10.	Make unlined upper pockets. Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers, or pleats; the basic material and both edges of binding shall be securely caught in the stitching. The pleats shall be vertically centered and the folded side edges of the pleats shall be parallel. The pockets shall be uniform in shape and size in accordance with the pattern. Creasing Machine Operation a. Form a vertical box pleat on the outside center of upper pockets with a heated creasing machine. The pleat shall be 1-1/2 inches wide.					
	b. Secure the pleat with a row of stitches 1/16 inch from top and bottom edges, respectively.	301 or 101	SSa-1 (each end) SSa-1 (each end)	10-14 10-14	A A	A
	c. Tack the abutted edges of the pleat together on the inside of the pocket with blindstitching.	103	SSm-1	6-8	A	
	d. Bind the upper edge of the pockets with 1-1/8-inch-wide bias binding, with the pleat closed and both edges of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges of the binding.	301	BSc-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
10.	Make unlined upper pockets. (cont'd)					
	e. Turn under and crease the side and bottom edges of the pockets in a heated edge creasing machine to conform to the proper shape and size of the finished pocket shaper. Trim the lower corners of the pockets.					
	OR					
11.	Make lined upper pockets.					
	Finished appearance. The binding shall be uniformly stitched and shall not be tight or full causing puckers, gathers, or pleats; the basic material and both edges of the binding shall be securely caught in the stitching. The pleats shall be vertically centered and the folded side edge of the pleats shall be parallel. The pleat shall be 1-1/2 inches wide. The pockets shall be uniform in shape and size in accordance with pattern.					
	Creasing Machine Operation					
	a. Form a vertical box pleat on the outside in the center of pocket by creasing machine.					
	b. Seam the pleat closed across top and bottom, with edges abutted.	301	SSa-1	10-14	A	A
	c. Blindstitch the abutted edges of the pleat together.	301	SSm-1	4-8	A	A
		or 103	SSm-1	4-8	A	
	d. Place the silesia lining on the underside of pocket and seam together along the top, sides and bottom 1/8 to 3/16 inch from the raw edges. Turn and crease					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
11.	Make lined upper pockets. (cont'd)					
	the side and bottom edges of the pocket in a heated edge creasing machine to conform to the proper shape and size of the finished pocket shaper.					
	e. Bind the upper edge of pockets, including the lining, with the outside edge only of the binding turned under and caught in the stitching 1/16 inch from the inner edge of the binding. Trim lower corners of the pockets.	301	BSb-1	10-14	A	A
	OR					
	f. Fold the pocket lengthwise at the upper and lower notches and stitch on the outside of the pocket 1-1/2 inches from folded edge, forming a vertical box pleat.	301	OSf-1	12-16	A	A
	g. Secure the pleat with a row of stitches 1/16 inch from top and bottom edges, respectively.	301	SSa-1	6-8	A	A
	h. Press pleat in center of pocket smooth and flat.					
	i. Place the silesia lining on the outside of pocket and seam together along the sides and bottom 3/16 inch from the raw edges.	301	SSa-1	10-14	A	A
	j. Trim the bottom corners of pocket, if necessary. Turn pocket and baste edges, with silesia lining slightly back from pocket edges.	101 or Hand			Commercial thread	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
11.	Make lined upper pockets. (cont'd)					
	k. Put on shaper and trim top of pocket if necessary. Stitch across top of pocket.	301	SSa-1	10-14	A	A
	l. Bind the upper edge of pockets including the lining with the outside edge only of the binding turned under and caught in the stitching 1/16 inch from the inner folded edges of the binding. The ends of binding shall extend 1/4 to 1/2 inch beyond each side of pocket.	301	BSb-1	10-14	A	A
	m. Press pocket smooth and flat.					
12.	Make lower pockets.					
	Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers, or pleats. The pockets shall be uniform in shape and size in accordance with finished pocket shaper.					
	a. Position the silesia lining on the underside of pocket and seam together along the top, sides and bottom 1/8 to 1/4 inch from raw edges.	301	SSa-1	6-10	A	A
	b. Bind the upper edges of the pockets with bias binding, including the lining, with the outside edge only of binding turned under and caught in the stitching 1/16 inch from the inner folded edges of the binding.	301	ESb-1	10-14	A	A
	c. Mark the pockets in accordance with finished shaper.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
12.	Make lower pockets. (cont'd)					
	d. Seam lower corners of pockets 3/8 inch from the edges.	301	SSa-1	10-14	A	A
	e. Spread open the corner seams of pockets and press smooth and flat with a heated pressing iron.					
	f. Trim corners and turn pocket, working out the corners completely. Turn under side and bottom edges of pockets at the mark to form bellows and baste along the folded edges. Edgestitch uniformly 1/8 inch from folded edges.	301 or 101 or Hand	OSf-1	12-16	A (silk) (commercial)	A
	g. Press entire pocket smooth and flat with heated pressing iron or pressing machine, evenly increasing the edges.					
	h. The pockets shall be uniform in shape and size in accordance with the finished pocket shaper.					
13.	Make shoulder straps.					
	Finished appearance. The shoulder straps shall be uniformly stitched and shall finish smooth and flat, without twists, gathers, puckers, pleats or raw edges. The buttonholes shall be cut-first type, well made, properly positioned, well worked over gimp to fit a 27-line insignia button, and the stitching shall be securely caught in the basic material. The gimp shall be pulled through to the underside of the buttonhole, and the purling of the buttonholes shall be on the outside of the shoulder straps.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
13.	Make shoulder straps. (cont'd)					
	a. The shoulder straps shall be made of two pieces of basic material.					
	b. Seam the two pieces together 3/16 inch from the edges at the front, back and collar end, evenly trimming all edges of the strap for proper turning.	301	SSe-2 (a)	10-14	A	A
	c. Turn the straps, working the seams out to the edges. Edgestitch the straps uniformly 1/8 inch from the seamed edges.	301	SSe-2 (b)	12-16	A (silk)	A
	d. Make a horizontal eyelet-end, square-bar type buttonhole, cut 3/4 inch long, in each strap midway between the back and front edges and with the inside edge of the eyelet placed so that in the finished coat the edge of the shoulder strap button will be 1/4 to 1/2 inch from the edge of the collar.	But-ton hole		38 per button-hole (minimum) (not in-cluding bartack)	B (silk)	F
	e. The buttonholes shall be well worked over gimp and the ends of the gimp shall be pulled through to the underside of the buttonholes.					
	f. Securely bartack the end of the buttonholes and trim the ends of the gimp.	Bar-tack		21 per bartack (minimum)	A (silk)	A
	g. Press the straps smooth and flat with a heated pressing iron or pressing machine. The strap shall be uniform in shape and size in accordance with the pattern. The seams shall finish at the edges of the straps.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
13.	Make shoulder straps. (cont'd)					
	h. On the finished coat, the straps shall measure 2-3/8 ±1/8 inches at the eyelet end of the buttonhole.					
14.	Make undercollar.					
	a. The undercollar assembly may consist of one or two pieces of undercollar cloth and a single piece of permanent finish interlining material, or the interlining may be two pieces.					
	b. Join the two halves of the undercollar with a 3/8-inch seam (when two-piece construction is used).	301	SSa-1	10-14	A	A
	c. Spread the seam open and press flat with a heated pressing iron.					
	d. Join the two halves of the interlining together with a 3/8-inch lap seam (when two-piece construction is used).	301	LSa-1	10-14	A	A
	e. Mark the breakline of undercollar with the undercollar stand marker.					
	f. Seam undercollar to interlining at breakline; stand shall be 1-1/4 ±1/8 inches at center.	301	SSa-1	10-14	A	A
	g. Quilt the interlining to the undercollar with 4 to 5 rows of blindstitching.	103	SSm-1	4-6	A	A
	h. Press undercollar smooth and flat with a heated pressing iron or pressing machine.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
14.	Make undercollar. (cont'd)					
	i. Mark and cut the undercollar in accordance with undercollar shaper or undercollar may be die cut to conform to pattern shaper. Trim undercollar interlining 1/8 to 3/16 inch away from lower edge of undercollar.					
	j. Seam undercollar to interlining 1/2 ±1/8 inch from top and side edges.	301	SSa-1	10-14	A	A
15.	Assemble topcollar and undercollar.					
	Finished appearance. The collar shall be uniform in appearance and shall finish smooth and flat without twists, gathers, puckers, pleats or raw edges (top and sides). The felling shall not be too tight or loose and the collar material shall be securely caught in the stitching. The eyelets shall be well worked with the purling on the outside of the collar and shall finish with a 1/8-inch diameter opening.					
	a. Position topcollar between undercollar and interlining with the upper edge abutting the undercollar-interlining seam, notches aligned.					
	b. Join topcollar to undercollar at top edge with zig-zag stitching properly distributing the fullness between the notches. The zig-zag stitching shall extend to approximately 3/4 inch from each side edge of the collar.	301	LSa-1	8-10	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
15.	Assemble topcollar and undercollar. (cont'd)					
	c. Turn the topcollar to the outside over the upper edge of the interlining and baste along the upper edge and along the breakline with the fullness placed between the two rows of basting stitches. The basting shall extend to approximately 1-1/2 inches from the side edges.	101 or Hand			commercial	
	d. Trim and turn the side edges of the topcollar 3/8 inch over the interlining between the undercollar and the interlining and baste the edges, forming the points at the upper corners of the collar.	Hand or Machine			commercial	
	e. Fell the points at the upper corners of the collar and continue to fell topcollar to the undercollar along each side.	Hand		8-10	C (silk)	
	f. Press the collar smooth and flat with a heated pressing machine. Edges and corners shall be smooth, flat and uniformly even.					
	g. Trim the lower edge of the topcollar to provide for proper seaming to the coat, and cut a guide notch in the lower edge of the top collar at the center.					
	h. Make one eyelet at each end of the collar, 1 inch from the side and upper edge, respectively. The eyelets shall be well worked with the purling on the outside of the collar, and shall finish with a 1/8-inch diameter opening.	Eyelet		20 per eyelet (minimum)	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
16.	Seam sleeves at forearm.					
	Finished appearance. The forearm seam shall finish smooth and flat without twists, gathers, puckers or pleats and shall start and finish evenly.					
	a. Position the top and undersleeves with notches matching and join at the forearm with a 3/8-inch seam.	301	SSa-1	12-16	A	A
	b. Spread open the seam and press flat, holding seam short, with a heated pressing iron.					
17.	Join cuffs to sleeve.					
	Finished appearance. The upper curved edges of cuffs shall be properly formed and creased and the cuffs shall be uniformly stitched to sleeves. The point of the cuff shall be centered between the lower front creased edge and the creased backarm seam of sleeve.					
	a. Fold the cuff lengthwise at the point with wrong side out. Tack the point 1/8 inch from the raw edges. Turn cuff completely, working out the point.	301	SSa-1	12-16	A	A
	b. Turn under the upper edge of the cuff, forming the finished curved edge in accordance with the shape of the pattern, and press smooth and flat with a heated pressing iron or pressing machine, creasing the edge.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
17.	Join cuffs to sleeve. (cont'd)					
	c. In lieu of pressing, the turnunder at upper edge of cuffs may be basted.	101 or Hand			commercial	
	d. Mark the sleeve in accordance with the sleeve cuff marker for positioning the cuffs, with notch matching the forearm seam line and with the lower raw edge of the sleeve and marker even.					
	e. Position the cuffs at the mark on the sleeve and seam uniformly 1/8 inch from the upper folded edge of cuff.	301	LSd-1	12-16	A (silk)	A
18.	Seam sleeve at backarm.					
	Finished appearance. The backarm seam shall finish smooth and flat without twists, gathers, puckers, or pleats and shall start and finish evenly.					
	a. Join the top sleeve to the undersleeve at the backarm with a 3/8-inch seam, catching the ends of the cuff in the seam.	301	SSa-1	12-16	A	A
	b. Spread open the sleeve and cuff seams and press flat with a heated pressing iron.					
19.	Tack cuff to sleeve.					
	a. Turn the cuff outlet to the inside, in accordance with notches, against the bottom end of the sleeves, and baste along the turned edge of cuff.	Hand or 101			commercial commercial	
	b. Tack the raw edge of the cuff to the body of the sleeve with blindstitching.	103	SSm-1	4-6	A	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
19.	Tack cuff to sleeve. (cont'd) c. On the finished coat, the length of the cuff shall be 3-1/4 ±1/4 inches at the front and back creased edges and 6 ±1/4 inches at the point.					
20.	Seam sleeve linings. Finished appearance. The sleeve lining shall be uniform in appearance, uniformly stitched and shall finish smooth and flat without twists, gathers, puckers or pleats. The seams shall start and finish evenly.					
	a. Position the top and under-sleeve lining pieces in accordance with notches on pattern and join at the forearm and backarm respectively, with a 3/8-inch seam.	301	SSa-1	10-14	A	A
21.	Assemble sleeve and sleeve lining. Finished appearance. The sleeve linings shall be properly positioned and seamed to sleeve without twists, gathers, puckers or pleats. a. Position the sleeve lining on the sleeve with the upper edge of lining extending 3/4 to 1 inch beyond the armhole edge of sleeve.					
	b. Seam or tack lining to sleeve backarm and forearm seam allowance, respectively, commencing approximately 5 inches above finished bottom edge of sleeve and extending to approximately 5 inches below armhole edge at the backarm and approximately 4-1/2 inches below armhole edge at the forearm.	301 or Hand	SSa-1 1 to 1-1/2 inches in length	6-8	A	A commercial

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
22.	Fell turnup of sleeve lining; press sleeves.					
	Finished appearance. The sleeve linings shall not be short, tight or twisted at bottom of sleeves, and shall extend to within 1 to 1-1/4 inches from finished end of sleeve. The sleeves shall be properly pressed.					
	a. Pull sleeves through lining and turn under the bottom edge of sleeve lining to finish 1 to 1-1/4 inches above the finished end of the sleeve, and baste to turnup of cuff. The sleeve lining may be felled to bottom of sleeve without basting.	Hand or 101			commercial	
	b. Fell the folded edge of sleeve lining to turnup of the cuff with blindstitching.	301 or Hand	EFc-1 (b)	6-8 8-10	A (silk) C (silk)	A
	c. Turn sleeves and assemble in pairs. The sleeves may be pressed prior to setting. The backarm crease shall be on the backarm seam.					
23.	Hem yoke and front lining.					
	Finished appearance. The hem shall be uniformly stitched and uniform in width, and shall finish smooth and flat without twists, gathers, puckers or pleats.					
	a. Hem the bottom edge of the yoke and front linings, respectively, with the raw edges turned under and caught in stitching 1/16 inch from the folded upper edge of hem.	301	EFb-1	10-14	A	A
	b. The hem shall measure 3/8 ±1/8 inch wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
24.	Make center pleat in back yoke lining.					
	Finished appearance. The pleat shall be uniform in width and shall finish smooth and flat without puckers or pleats.					
	a. Fold the back yoke lining, in accordance with the notches on the pattern, to form a 5/8-inch-wide pleat at the center back. Tack lengthwise along the pleat in line with the notches for a distance of 1 to 1-1/2 inches at the top end.	301	OSf-1	10-14	A	A
	OR					
	b. Form the pleat by stitching across top of pleat at neckline. Press the pleat smooth and flat from the top to the bottom edges of the back yoke lining with a heated pressing iron. The folded edge of the pleat on the outside of the back yoke shall be towards the left side.	301	SSa-1	10-14	A	A
25.	Stitch dart in front lining.					
	Finished appearance. The dart shall be tapered to a point at the lower end and shall finish without gathers, puckers, or pleats.					
	a. Fold the front lining, matching the cut edge of the underarm dart. Stitch lengthwise along the dart, tapering from 3/8 inch at the armhole to a point at the lower end.	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
26.	Seam wool facing to front lining. Finished appearance. The lining shall be carefully and properly aligned, and seamed to the facing so that in the finished coat, the lining shall be smooth and flat along the facing without creases, bulges, overlapping of excess material or other defect or distortion. a. Position the lining on the wool facing with the top edges even and bottom finished edge of the lining matched with the notch in the back edge of the facing to insure proper seaming. b. Seam the front edge of the lining to the back edge of the facing 3/8 inch from the edge. c. Press the facing lining seam, the underarm dart, and the bottom edge of the lining smooth and flat with a heated pressing iron, with the raw edges of the underarm dart toward the side.	301	SSa-1	10-14	A	A
27.	Assemble inside pocket on lining and wool facing. a. The inside pocket shall be made of one piece of silesia with a facing of rayon lining at the horizontal piped pocket opening. b. Position the rayon facing on the pocket material with notches matching, Turn under the top and bottom edges, respectively, of the facing and seam the facing to the pocket 1/16 to 1/8 inch from the folded edge with the top edge of	301	LSd-1 (each turned edge) SSa-1 (each selvage edge)	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
27.	Assemble inside pocket on lining and wool facing. (cont'd)					
	label centered and caught in the stitching at the top edge of facing. Selvage edge need not be turned under.					
	c. Seam the remaining three sides of label to silesia pocket 1/8 inch from each edge.	301	SSa-1	10-14	A	A
	d. Mark the right wool facing and the front lining, with the pocket marker furnished, for the position of the pocket opening.					
	e. Position the pocket at the mark with the pocket facing next to the lining material. Place the silesia stay piece on the underside of the lining, with the diagonal extension of the stay extending to the armhole edge of the lining.					
	f. Seam the pocket to the lining and wool facing through the silesia stay piece with one row of stitches 3/16 to 1/4 inch on each side of the mark for the pocket opening.	301	SSv-2	10-14	A	A
	g. Cut the opening for the pocket midway between the two rows of stitches joining the pocket and pocket stay to the lining and wool facing, tongue notching each end of the opening.					
	h. Turn the pocket through the opening to the inside with the front and the backs of the pocket toward the bottom and top edges, respectively, of the	301		10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
27.	Assemble inside pocket on lining and wool facing. (cont'd)					
	lining. Form the piping at the top and bottom edge of the opening. Topstitch the upper and lower edges of the pocket opening adjacent to the seamed outer edges of the piping.					
	OR					
	i. Accomplish the pocket opening with a double piped pocket machine which stitches, cuts and turns in one operation. When this machine is used, the piping piece may be trimmed to permit insertion into the machine. The joining seam of the top and bottom piped edges shall be raise stitched through lining and coat facing prior to pocket closing and top edgestitched through all plies. Tack ends of pocket opening.	101 or 301			A A	A A
	j. Turn down the back part of the pocket and seam the front and back together approximately 1/2 inch from raw side and bottom edges, catching the tongue notch at each end of the pocket opening in the stitching, and securely bartacking each end of the tongue notch. Continue to stitch across top of pocket adjacent to top piping seam, catching silesia stay in the stitching and closing top of pocket.	301	SSa-1	10-14	A	A
	k. Stitch the lining, on the outside, to the diagonal extension of the pocket stay from the armhole end of the pocket opening to the armhole.	301	SSv-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
27.	Assemble inside pocket on lining and wool facing. (cont'd)					
	1. Notch top of silesia pocket at front edge of the full width of seam allowance and blindstitch inner ply of pocket to facing (see 76.c for alternate operation).	103 or 306	SSm-1 SSm-1	4-6 4-6	A A	A
	m. In the finished coat, the width of the pocket opening shall be 5 ±1/4 inches for sizes 36 to 38, and 5-1/2 ±1/4 inches for sizes 40 to 46. The depth of the pocket shall be not less than 6 inches.					
28.	Bind backparts.					
	Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers, or pleats and the basic material and edges of binding shall be caught in the stitching. The outside raw edge only of the binding shall be turned under and caught in the stitching.					
	a. Bind the raw back edge of the left and right backparts, respectively, with bias binding, from the top edge of backparts to the top end of the vent. The outside raw edge only of the binding shall be turned under and caught in the stitching 1/16 inch from the inner folded edge. When binding the left backpart, continue to bind the raw edge of the vent for the left backpart from the top to the bottom end. The binding is not required along the top edge of the vent.	301	BSb-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
28.	Bind backparts. (cont'd)					
	b. Bind the raw side edge of the left and right backpart, respectively, from the top to the bottom edge of the coat with bias binding. The outside raw edge only of the binding shall be turned under and caught in the stitching 1/16 inch from the inner folded edge.	301	BSb-1	10-14	A	A
29.	Bind facings.					
	Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers, or pleats and the basic material and edges of binding shall be securely caught in the stitching. The outside raw edge only of the binding shall be turned under and caught in the stitching.					
	a. Bind the raw back edge of facing with bias binding, turning under the outside raw edge of binding only, and catching the turned under portion in the stitching 1/16 inch from the inner folded edge. The binding shall extend from the bottom edge of facing to not less than 1 inch above bottom finished edge of lining.	301	BSb-1	10-14	A	A
30.	Seam lining to right vent.					
	Finished appearance. The vent lining shall be uniformly stitched and shall finish smooth and flat without twists gathers, puckers or pleats.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
30.	Seam lining to right vent. (cont'd)					
	a. Fold vent lining in half lengthwise face to face and stitch across the top edge with 1/4-inch seam. Turn vent lining, forcing out corner.	301	SSa-1	10-14	A (silk)	A
	b. Position the raw edges of lining on the outside of right vent and seam together 3/8 inch from back edge. The lining shall extend from the bottom turnup to not less than 1 inch beyond end of the vent.	301	SSe-2 (a)	10-14	A (silk)	A
	c. Turn the lining to the inside with the seam 1/16 to 1/8 inch back of folded edge. Stitch the entire length of vent 1/8 inch from the folded edge.	301	SSe-2 (b)	10-14	A (silk)	A
31.	Join backparts.					
	Finished appearance. The backs shall be joined without gathers, puckers, or pleats. The folded edge of the left vent shall be in line with the center back seam. In the finished coat, the left backpart shall overlap the right backpart 3-1/2 ±1/4 inches measured at the bottom edge of the coat, and the left vent shall be 1-1/2 ±1/8 inches wide measured at the bottom bound edge.					
	a. Stitch the 1/4-inch-wide stay tape to the left back along the vent, with the edge of the tape positioned approximately 1/8 inch in back of the fold notch of the vent.	301	SSaa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
31.	Join backparts. (cont'd)					
	b. Position the backparts with edges even and join at the center with a 5/8-inch seam from the top edge of the backs to approximately 3/4 inch below top end of the vent. From that point, continue to stitch diagonally across the top end of the left and right vents to the bound edge of the backs.	301	SSa-1	12-16	A	A
	c. Turn the left vent to the inside of the left backpart in accordance with the notches and edgestitch uniformly 1/8 inch from the folded edge. The folded edge of vent shall be in line with the center back seam.	301	OSf-1	10-14	A (silk)	A
32.	Press center back seam and vent lining.					
	a. Notch the top end of the right vent diagonally from the juncture point of the vent and the center seam allowance of the right backpart of lower end of the stitching for the center back seam.					
	b. Spread the center back seam open and press flat with a heated pressing iron.					
33.	Fell vent lining.					
	Finished appearance. The folded edge of the lining shall extend beyond bound edge of the center seam allowance of the right backpart. The felling shall not be visible on the outside of the coat.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
33.	Fell vent lining. (cont'd)					
	a. Baste vent lining to coat.	101 or Hand				
	b. Fell vent lining to coat across the top edge and on both sides for a distance of not less than 1 inch from the top end.	Hand			C (silk)	
	c. Stitch and backstitch across the top end of vent, on the outside through the vent lining, for a distance of 1-1/2 ±1/8 inches from the back center seam.	301	SSa-1	10-14	A (silk)	A
34.	Seam reinforcement stay to armhole and shoulder.					
	Finished appearance. The silesia reinforcement stays shall be sewn to the armhole and shoulder edges of the fronts without gathers, puckers or pleats.					
	a. Seam the 3/4-inch-wide silesia stays to the underside of the fronts along the shoulder edge and upper front edge of the armhole, respectively, 1/8 inch from the outer edges. The top end of the armhole stay and the lower edge of the shoulder stay shall form a right angle at the armhole without the stays overlapping each other.	301	SSaa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
35.	Bind lower fronts. Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers or pleats and the basic material and edges of binding shall be securely caught in the stitching. The outside raw edge only of the binding shall be turned under and caught in the stitching.					
	a. Bind the raw back edge of the lower fronts with bias binding, turning under the outside raw edge of binding only and catching the turned under portion in the stitching 1/16 inch from the inner folded edge. The binding shall extend from the waist seam to the bottom edge of fronts.	301	BSd-1	10-14	A	A
36.	Assemble fronts. Finished appearance. The waist darts shall be properly tapered and shall finish without gathers, puckers or pleats. The upper and lower front and side-body panel shall be joined without gathers, puckers or pleats.					
	a. The fronts shall consist of an upper front, a side-body panel, and a lower front (skirt).					
	b. Fold the upper fronts, matching the cut edges of the waist dart, and stitch the entire length of the dart 3/8 inch from the cut edges at the lower end and tapering to a point at the upper end.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
36.	Assemble fronts. (cont'd)					
	c. Position the upper front and side-body panel with edges even and join with a 3/8-inch seam.	301	SSa-1	12-16	A	A
	d. Spread open the waist dart and the underarm seam and press flat with a heated pressing iron.					
	e. Position the upper and the lower fronts with edges even and join together at the waist with a 3/8-inch seam and with the 1/4-inch wide stay tape positioned on the upper fronts 1/4 inch from the edge and caught in the stitching.	301	SSab-1	12-16	A	A
	f. The tape shall be sewn with normal tension, not loose or tight, and shall extend from the center of the side-body panel to not more than 3 inches from the front edge of the fronts.					
	g. Spread open the waist seam and press flat with heated pressing iron.					
	h. Press and shape the fronts, from the waist to the top edge, on a suitable type heated pressing machine, shrinking the fronts to eliminate the excess fullness of the chest.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
37.	Set pockets and pocket flaps. Finished appearance. The pockets and pocket flaps shall be set without twists, gathers, puckers, pleats or raw edges. The stitching for the raised edge of the flaps shall conform to stitching for setting the pockets. The side edges of the pockets shall not be exposed beyond the sides of the flaps. The pocket and pocket flaps on the left and right side, respectively, shall be in horizontal alignment with each other. The front edge of the upper pockets, pocket flaps, and pleats shall be in parallel alignment with front edge of coat when buttoned. The point of the upper pocket flap shall be at the center of the pleat on the upper pockets. Pockets and pocket flaps shall conform to the measurements in Table III. The front edge of the lower flap shall be in line with the front edge of the upper pockets and the lower front corner of the bottom pocket shall be 3/8 inch further back toward the side seam. a. Mark the fronts in accordance with the marks on the pattern for position of upper and lower pockets and pocket flaps. b. Position the pocket flaps on the outside of the fronts in accordance with the marks for the upper and lower pocket flaps respectively. Position the silesia stay piece for the flaps and top corners of the pockets on the underside of the fronts.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
37.	Set pockets and pocket flaps. (cont'd)					
	c. Seam the pocket flaps to the front through the silesia stay, uniformly 1/8 inch from the serged edge of the flap.	301	LSq-2 (a)	12-16	A (silk)	A
	d. Turn down the flaps and topstitch the flaps 1/8 inch from the raised edge.	301	LSq-2 (b)	12-16	A (silk)	A
	e. Position the pockets in accordance with the marks for the upper pockets and seam to the fronts uniformly 1/8 inch from the side and bottom edges. The top corners of the pockets shall be securely tacked through the silesia stay pieces.	301	LSd-1	12-16	A (silk)	A
	f. Position the lower pockets in accordance with the marks on the pattern and with lower edge 1-1/4 inches above bottom edge of finished coat. Seam bellows of pockets from the inside to fronts 3/8 inch from side and bottom serged edges. Securely tack upper corners of pockets through silesia stay pieces.	301	LSbj-1	10-14	A	A
38.	Make buttonhole tab.					
	Finished appearance. The sword slit buttonhole tab shall finish smooth and flat without distortion. The stitching shall be uniform and the buttonhole shall be properly positioned. The tab shall finish 2-3/8 ±1/8 inches long and 2 ±1/8 inches wide.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
38.	Make buttonhole tab. (cont'd)					
	a. Buttonhole tab for sword slit shall be made of one ply of basic material and one ply of rayon lining material for class 2 coats and two plies of basic material for class 1 coats.					
	b. Seam together the lining piece and basic material at side and bottom edges of tab 3/16 inch and turn and top-stitch 1/8 inch from seamed edge.	301	SSe-2 (shows finished seam)	12-16	A (silk)	A
	c. Seam the pieces together 1/8 inch from raw edges at top end of tab.	301	SSa-1	12-16	A (silk)	A
	d. Make a vertical eyelet-end taper-bar type buttonhole, cut 5/8 inch long, in center of tab with the inside edge of the buttonhole eyelet placed 5/8 inch above bottom edge of tab. The buttonhole shall be well worked over gimp to fit a 22-line sewing hole button. The purling of the buttonhole shall be on the lining side of the tab.	But-ton hole		60 per button-hole (includ-ing tack)	B (silk)	F
39.	Make sword slit and attach buttonhole tab (see Figures 7 and 8).					
	Finished appearance. The sword slit shall finish without bulges or excessive bulkiness. All parts shall be securely fastened and properly positioned. The flap shall be securely attached and properly positioned to cover slit properly.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
39.	Make sword slit and attach buttonhole tab (see Figures 7 and 8). (cont'd)					
	a. Mark left front for 2-inch long sword slit in waist seam. The back end of the sword slit shall be 1/2 to 5/8 inch in front of underarm seam.					
	b. Topstitch the front for 2 inches at the marks for the sword slit 1/16 inch below waist seam. The stitching shall be through the allowance of the waist seam but not through the pocket stay. The lower pocket stay material shall be trimmed away from the sword slit opening.	301	OSf-1	12-16	A (silk)	A
	c. Tack across waist seam at each end of the topstitching to prevent seam from opening when sword slit is cut. The tacks shall be 1/8 inch long, 1/16 inch on each side of seam.	301	SSa-1	12-16	A (silk)	A
	d. Mark tab 1-3/4 inches from bottom edge. Cut waist seam open for sword slit and position tab on outside of front with top end inserted through slit. Align mark on tab with upper folded edge of slit. Topstitch front 2 inches along waist seam 1/16 inch above opening, stitching through seam allowance and tab, and securely tacking each side of the tab to the front at the opening. The basic fabric side of the tab shall be towards the outside of the coat.	301	LSd-1	12-16	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
40.	Set belt loops. Finished appearance. The belt loops shall finish vertically straight and shall be positioned with the top front edge of the loops for sizes 36 to 40, inclusive, placed 1/4 inch to the back of the underarm seam and for sizes 42 to 46 inclusive, placed 1/4 inch to the front of the underarm seam. The belt loops shall measure 2-1/2 ±1/8 inches long from top to bottom folded edges. The underloop for the belt fastener shall have an opening of not less than 1-3/4 inches.					
	a. Position the 5-1/2-inch long belt loop on the left front, with one end approximately 1 inch above the waist seam and bartack the loop to the front 1/8 to 3/16 inch from the end of the loop. Bartack the loop to the front at the top edge of the lower pocket flap to form the underloop for the belt fastener. Turn under the top end of the loop and bartack the loop to the front 1/8 to 3/16 inch from the folded edge, catching the turned under portion of the loop in the stitching (see Figure 9).	Bar-tack		28 per bartack (minimum)	A (silk)	A
	b. Position one end of the 3-1/2 inch long belt loop on the right front and bartack the loop to the front at the top edge of the lower pocket flap. Turn under the top end of the loop and bartack loop to the fronts 1/8 to 3/16 inch from the folded edge with loop caught in the stitching.	Bar-tack		28 per bartack (minimum)	A (silk)	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
41.	Interline fronts.					
	a. Position the left and right fronts on the respective coat front interlining and baste along the top edge of the upper pocket flap on the outside.	301 or Hand			commercial	
	b. Tack the top edge of upper pocket stay and the front end of the upper and lower pocket stay to the coat front interlining. The front end of the stays shall be tacked as close to the side edges of the pocket flap as possible.	301 or Hand			commercial	
	c. Baste the interlining and fronts together starting approximately 1-1/2 inches above the top edge of upper pocket flap and baste along the center of the upper pocket flap and pocket, along the waist dart to the top edge of the lower pocket flap and then diagonally across the front corner of the lower pocket flap to the front edge of the lower pocket and from that point continue to baste along the front edge of the pocket to the bottom of the coat.	301 or Hand			commercial	
	d. Baste along the breakline of lapel and along the front edge down to the bottom of the coat.	301 or Hand			commercial	
	e. Baste across the shoulder, allowing room for setting the shoulder pad and working the fullness towards the armhole. Baste along front of armhole and down the back edge of the interlining.	301 or Hand			commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
42.	Baste bridle tape to lapel.					
	a. Position the 5/8-inch bridle tape adjacent to and behind the breakline from gorge to 1 to 1-1/2 inches from lower end of lapel.					
	b. Baste the tape evenly and smoothly for a distance of 1-1/2 to 2 inches down from the gorge; continue basting for a distance of 4 to 5 inches, holding the tape taut and working in 3/8 to 1/2 inch breast fullness. Baste the remainder of the tape evenly, smoothly and without tension or fullness. Tape and interlining shall be stamp marked to assure proper fullness.	301 or Hand			commercial	
43.	Pad lapels.					
	a. Pad each lapel from approximately 1 inch from the front edge to the breakline with six rows of blindstitching, properly distributing the fullness in the interlining between the rows of stitches to roll the lapels.	103 or 306	SSm-6	4-8	A A	 A
	b. Blindstitch both edges of bridle tape to interlining.	103 or 306	SSm-2	4-8	A A	 A
	c. Press the left and right fronts on a suitable type heated pressing machine, with the chest to conform to shape of the body.					
44.	Sew snap fastener to upper pockets.					
	Finished appearance. The pocket flaps shall lie smooth and flat without distortion when closed.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
44.	Sew snap fastener to upper pockets. (cont'd)					
	a. Securely sew one socket snap fastener part to each side edge of the upper pockets to engage stud part of flaps. When socket part is sewn by hand, the stitching shall be tacked off with not less than two stitches.	101 or 301 or Hand		21 per fastener (minimum) 16 per fastener (minimum) 3-4 double thread (not including tack)	A A C (silk)	 A
45.	Join back and fronts at sides.					
	Finished appearance. The back and fronts shall be carefully joined at the sides without twists, gathers, puckers or pleats.					
	a. Position the back and fronts with edges even and join together at the sides with 3/4-inch seams.	301	SSa-1	12-16	A	A
	b. Spread open the side seams and press flat with a heated pressing iron.					
46.	Tape armholes.					
	a. Sew 1/4-inch-wide tape around the armhole from a point 1 to 1-1/2 inches above notch on the fronts to 3/4 to 1 inch from shoulder edge on the back.	301 or 401	SSaa-1	10-14	A	A
	b. From the front notch to approximately 1-1/2 to 2 inches back of the underarm seam, the tape shall be stitched with slight tension and from this point up to 1-1/2 to 2 inches above the notch on the back, the tape shall be held taut while stitching and gathering 1/4 to 3/8 inch fullness.	301 or 401	SSaa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
47.	Press armholes, shoulder blades and lapels. a. Press the armhole tapes, the shoulder blades and lapels smooth and flat with a heated pressing iron or suitable type pressing machine.					
48.	Shape fronts. a. Mark and shape the front edges of the coat; and mark and shape the lapels in accordance with shaper furnished. The left front edge shall be dressed from bottom notch of coat to base of lapel. b. Mark the fronts 1-1/4 inches below the bottom edge of the lower pockets for the bottom turnup. Trim the excess material if necessary. In the finished coat, the bottom turnup shall be 1 ±1/8 inches wide. Side seams and left vent shall not be mitered at the bottom. c. Trim coat front interlining 1/4 to 3/8 inch back from top and front edges of lapel and front edge of coat. Trim the bottom of the interlining 1/4 to 3/8 inch above the mark for the bottom turnup and the bottom edge of coat, matching the length of right and left backparts at the vent. OR d. Marking and shaping the front edges and the lapels and trimming the bottom edge of the coat may be accomplished with a clicker machine using dies conforming to patterns furnished.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
48.	Shape fronts. (cont'd) e. In the finished coat, the left front shall overlap the right front 3-1/2 to 4 inches at the bottom edge, and the lapels shall be 3 ±1/8 inches wide.					
49.	Bind bottom turnup. Finished appearance. The binding shall be uniformly stitched, shall not be tight or full causing puckers, gathers or pleats; the basic material and edges of binding shall be securely caught in the stitching.					
	a. Bind the raw edge of the bottom turnup with bias binding, turning under the outside raw edge of binding only, and catching the turned under portion in the stitching 1/16 inch from the inner folded edge. The binding shall extend from the back edge of the front cutout to the edge of the vent at the center back.	301	BSb-1	10-14	A	A
50.	Baste facing-lining assemblies to fronts. a. Position the right and left facing-lining assemblies on the outside of the respective fronts and baste along the breakline, distributing the fullness in the breast area. Continue to baste along the front and bottom edges. Baste from the top and front edge of lapel down to the lower end of lapel, working the fullness towards the center of lapel.	301 or Hand			commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
51.	Join facings and fronts with tape.					
	a. Join the facings to fronts 3/16 inch from top and front edges of lapels, and front and bottom edges of coat, with the 3/8-inch-wide stay tape positioned on the interlining side of fronts and caught in the stitching.	301	SSab-1	12-16	A	A
	b. The tape shall extend from 1/2 inch to the back of the lapel notch to 1-1/2 to 2 inches from the side seam at the bottom of the coat, except the tape is not required along the step of the right front. The tape shall be sewn with normal tension along the top and front edges of the lapel and with slight tension along the front edge of the coat.					
	c. Fell inside edge of 3/8-inch-wide stay tape to the coat front interlining from top end of tape to the bottom edge of interlining.	103	SSm-1	4-6	A	
	d. Remove all basting stitches, trim lower front corner of the facings, corner of lapels, and notch the lapels for proper turning.					
	e. Press the front edges smooth and flat, with a heated pressing iron or pressing machine, removing the fullness.					
	f. Spread open the front facing seam from the lapel notch to the bottom edge of the coat and press smooth and flat with a heated pressing iron.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
52.	Baste front and bottom edge of coat.					
	a. Turn the facing-lining assemblies to the inside of the fronts, working out completely the corners of the lapel. Turn up the bottom of the coat, lapping the facing on the bottom turnup, and working out completely the front corner.					
	b. Baste along the top and front edges of the lapels, the front (including the step of the right front) and finished bottom edges of the coat, working the seams to the edge of the coat.	101 or Hand			commercial	
53.	Fell bottom turnup.					
	a. Fell the bound edge of the bottom turnup to the fronts and back with blindstitching.	103 or		6-8	0 (silk)	
		306 or		6-8	0 (silk)	0
		Hand		6-8	C (silk)	
54.	Baste facings (second time)					
	a. Baste the facings to the fronts approximately 1-1/4 inches from the top and front edges of the lapel and front and bottom edge of the coat, holding the lower corner of the coat in such a manner as to cause the lower front edge of the fronts to roll inward.	301 or Hand			commercial	
	b. Baste the lapels diagonally from the corner to the break-line, properly placing the fullness to allow the lapels to roll.	301 or Hand			commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
54.	Baste facings (second time)(cont'd)					
	c. Baste along the breakline of the lapel, properly placing the fullness to allow the lapels to roll.	301 or Hand			commercial	
	d. Baste as close to the facing-lining seam as possible, placing the fullness over the chest, and continue basting along the bound edge of the facing to the bottom turnup of the coat.	301 or Hand			commercial	
55.	Fell facings to fronts and tack to interlining.					
	a. Fell the bound edge of the left facing to left front with blindstitch from the bound edge of the bottom turnup to the lower edge of the front interlining at the waist.	301 or Hand	EFc-1 (b)	6-8	0 (silk) C (silk)	0
	b. Tack the back edge of the left facing to the interlining only, to not more than 3 inches below the shoulder edge.	301 or 103 or Hand	SSm-1	4-6 4-6 8-10	A A C (silk)	A
	c. Fell the bound edge of the right facing to the right front with blindstitching from the bound edge of the bottom turnup to not less than 2 inches above the bottom finished edge of the front lining.	301 or Hand	EFc-1 (b)	6-8	0 (silk) C (silk)	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
55.	Fell facings to fronts and tack to interlining. (cont'd)					
	d. Tack the back edge of the right facing to the front interlining only, with one row of blindstitching from not more than 3 inches from shoulder edge to not more than 1 inch above inside pocket opening. Continue the tacking along the outer ply of inside pocket seam allowance the length of the pocket (see 76.c for alternate operation).	301 or 103 or Hand	SSm-1	4-6 4-6 8-10	A A C (silk)	A
56.	Baste yoke lining to back.					
	a. Position and baste the one-piece rayon yoke lining to the inside of the back along the center pleat and along the armholes, shoulder (allowing room for shoulder pad) and bottom edge of the yoke.	301 or Hand			commercial	
57.	Baste and fell front lining.					
	a. When necessary, trim the back end of lower pocket stays away from the side seam.					
	b. Tack the upper back corner of inside pocket to coat front interlining.	Hand or 301			commercial	
	c. Fold the front lining at the shoulder in accordance with notches, forming the chest pleat, and baste the entire length of the pleat. Continue to baste from lower end of the pleat toward the lower edge of armhole, along the side seam and across the bottom edge of lining. The folded edge of the chest pleat on the outside of the lining shall be towards the armhole.	Hand or 301			commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
57.	Baste and fell front lining. (cont'd)					
	d. Turn under the back edge of front lining and baste to coat, lapping the folded edge over the side seam and yoke lining and basting to allow room for felling of side seam lining.	Hand or 301			commercial	
	e. Fell the turned under portion of the front lining to side seam allowance of the fronts and to the yoke lining with blindstitching 1/4 to 3/8 inch from folded edge. Stitching shall extend from bottom finished edge of front lining to the lower edge of armhole.	301 or Hand	EFc-1 (b)	6-8 8-10	0 (silk) C (silk)	0
58.	Trim front lining and interlining.					
	a. Trim the excess coat front interlining and front lining at the armhole.					
	b. Trim the yoke lining even with the back at the neck.					
59.	Baste shoulder pads.					
	a. Insert shoulder pad between interlining and chest padding of coat front interlining in line with the armhole edge and securely tack the pad to the interlining and chest padding only.	301 or Hand			commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
60.	Seam shoulders. Finished appearance. The shoulder seam shall be uniformly stitched and the fullness on the backs shall be properly placed in order that the shoulders may be properly shaped. The shoulder seam shall finish without a distorted appearance. a. Join the fronts and back together at the shoulders with a 3/8-inch seam, working in the proper fullness on the backs, in accordance with good manufacturing practice. b. Spread open the shoulder seam and press flat holding the shoulder short and exercising much care in the pressing in order not to effect a distorted appearance in the finished seam. The pressing shall be accomplished with a heated pressing iron or pressing machine over a suitable block.	301	SSa-1	12-16	A	A
61.	Set shoulder straps. Finished appearance. The shoulder straps shall be properly positioned and uniformly stitched to the coat without twists, puckers, pleats or other distortion. On the finished coat, the straps shall be 2-3/8 ±1/8 inches wide at the armhole seam and shall taper to 1-3/4 ±1/8 inches at buttonhole eyelet end.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
61.	Set shoulder straps. (cont'd)					
	a. Position the shoulder straps with the rounded end of the strap even with the edge of the neck, and the center of the rounded end 1/4 to 3/8 inch in front of shoulder seam, and with the back edge of the strap 1/4 to 3/8 inch to the back of the shoulder seam at the armhole edge.					
	b. Seam the shoulder straps to the coat 1/8 to 1/4 inch from the armhole edge. Trim the shoulder strap even with the armhole, where necessary.	301	SSa-1	10-14	A	A
62.	Baste shoulder.					
	a. Position shoulder interlining and lining in place, baste upper part of each shoulder on the outside and turn the coat on the inside.	Hand or 301			commercial	
	b. Turn under raw edge of yoke lining at the shoulders, baste the upper part of each shoulder over the front lining and continue to baste across neck at back and with the end of the chest pleat caught in its basting.	Hand or 301			commercial	
63.	Stitch hanger and size label.					
	Finished appearance. The size label and the ends of the coat hanger shall be properly positioned to the inside center back of the coat at the neck.					
	a. Stitch the upper edge of the size label and the ends of the hanger to the inside center back of the coat at the neck.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
63.	Stitch hanger and size label. (cont'd)					
	b. The hanger opening in the finished coat shall be 2 ±1/8 inches long when measured along the lower edge of the collar.					
64.	Set collar.					
	Finished appearance. The collar shall finish centered on the back seam with the fullness distributed over the shoulders to conform to and hug the neck.					
	a. Mark the coat around the neck from shoulder seam to shoulder seam 5/8 inch from top edge, and continue to mark along the gorge with the line of marking tapering to 3/8 inch at the lapel notch.					
	b. Join the top collar to the facing at the gorge from the lapel notch to a point not less than 1 inch in back of the lapel breakline.	301	SSa-1	12-16	A	A
	c. Notch the facing at the end of joining seam.					
65.	Tack top collar to fronts at gorge.					
	a. Spread open the seam joining top collar to facing and tack the seam allowance of the top collar to the front at the gorge from the lapel notch to the end of the seam, catching the top end of bridle tape in the tacking.	Hand or 301	SSa-1	2-4 12-16	C ,(silk) A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
66.	Baste undercollar to coat.					
	Finished appearance. The center seam of the undercollar shall be in line with center back seam of coat. Fullness in the collar shall be properly placed over the shoulders to permit the collar to lie flat.					
	a. Turn the collar to the outside with the lower neck of the undercollar lapped on the outside of the coat at the mark.					
	b. Securely tack the corners of the collar across the juncture point of the collar and the lapel.	Hand		5-8 per tack	C (silk)	
	c. Baste the undercollar to the fronts and back, placing proper fullness over shoulder.	Hand or machine			commercial	
	d. In the finished coat, the ends of the collar and top edge of lapels shall each be 1-5/8 ±1/8 inches when measured from the tacked corners to the finished edges of collar and lapel, respectively.					
67.	Tack collar interlining to coat.					
	a. Raise the lower edge of the top collar and tack the collar interlining to upper edge of the coat and the yoke lining with overcast stitching, from shoulder seam to shoulder seam.	Hand or		2-3	C (silk)	
		103 or	SSm-1	3-4	A	
		301	SSm-1	3-4	A	A
68.	Baste top collar to coat.					
	a. Turn under the lower edge of the top collar and baste across neck.	Hand or 301			commercial	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
69.	Edgestitch coat and collar. Finished appearance. The coat shall be uniformly edgestitched the same gage as used on flaps and pockets.					
	a. Stitch the side and top edges of collar, top and front edge of the lapels, front edges of the coat (including the step of the right front), and continue the stitching along the bottom edge of the coat the width of the facings.	301	SSb-1 (collar) SSe-2 (lapels) front and bottom edges of coat (shows finished seam)	12-16	A	A (silk)
	b. The stitching shall be uniformly 1/8 inch from the edge.					
70.	Set sleeves. Finished appearance. The sleeve shall be properly and uniformly set and fullness at the armholes shall be properly distributed. The armhole sleeve seam shall finish smooth and flat without twists, puckers or pleats. The armhole shall not be stretched or distorted due to pressing.					
	a. Position sleeves on outside of coat at the armholes, with backarm seam of sleeve matching notch in the back, and with notch in top sleeve and fronts matching.					
	b. Join the sleeves to the coat with a 3/8-inch seam, distributing the fullness in accordance with good manufacturing practice and catching the ends of the shoulder straps in the stitching.	301	SSa-1	12-16	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
70.	Set sleeves. (cont'd) c. Press the entire armhole smooth and flat with a heated pressing iron to remove the fullness. Spread open the upper part of the armhole sleeve seam from backarm sleeve seam to approximately midway between shoulder seam and notch at front edge of armhole and press smooth and flat with a heated pressing iron. Care shall be exercised in pressing armhole seam in order not to stretch the armhole.					
71.	Baste armhole. a. Baste around inside armhole, positioning yoke lining, shoulder pad, and front lining in place and distributing fullness evenly. Turn the coat on the outside.	301 or Hand			commercial	
	b. Baste around outside armhole adjacent to the armhole seam, forcing out the armhole in the basting. The basting shall extend from the backarm seam of the sleeves to the front notch of the coat.	301 or Hand			commercial	
72.	Tack armhole and stitch sleeve head pads. Finished appearance. The armhole shall not be distorted or puckered due to stitching the sleeve head pads and linings at the armhole.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
72.	Tack armhole and stitch sleeve head pads. (cont'd)					
	a. Position the sleeve head pad on the sleeves with the folded edge of the pad approximately 1/8 inch back from the raw edge of the armhole seam, and with the front end of the pad matching the notch in the fronts.					
	b. Stitch the sleeve head pad to the sleeve from end to end through the armhole sleeve seam allowance, 1/8 inch from the folded edge of the pad, catching the armhole end of the stay for the upper pockets, the front and yoke linings, and the shoulder pad in the stitching. Continue stitching the linings around the remainder of the armhole, trimming away the excess material.	301		4-6	30/3	30/3
73.	Fell collar to coat.					
	a. Fell the lower edge of the entire length of under collar to the fronts and backs.	Hand		8-10	C (silk)	
	b. Fell the folded edge of the top collar to the coat from gorge seam to gorge seam, catching the top edge of the size label and the ends of the coat hanger in the stitching.	Hand		8-10	C (silk)	
74.	Fell linings.					
	a. Position the sleeve lining at the armhole with back and forearm seams of sleeves and linings matched. Turn under the armhole edge of the sleeve lining and lap the lining on	Hand		8-10	C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
74.	Fell linings. (cont'd)					
	the outside of the front and yoke linings at the armhole. Fell the sleeve lining to the coat around the entire armhole, placing the stitching over the folded edge of sleeve lining, distributing the fullness in accordance with good commercial practice and backstitching the lower armhole edge from approximately 1-1/2 inches to the front of forearm sleeve lining seam to the side seam of body lining.					
	b. Fell the lower corners of the front lining to the facings and the front seam allowance.	Hand		8-10	C (silk)	
	c. Fell the upper back edge of the front lining to the yoke lining, placing the stitching over the folded edge of front lining. Fell the lower finished edge of the yoke lining to the side seam allowance.	Hand		8-10	C (silk)	
	d. Fell the back lining and facing lining assembly together at the shoulders, placing the stitching over the folded edge of back lining and securing the top end of the chest pleat in the felling.	Hand		8-10	C (silk)	
75.	Tack facing and bottom turnup.					
	a. Fell the ends of the bottom turnup to the body of the coat at the vent.	Hand		8-10	C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
75.	Tack facing and bottom turnup. (cont'd)					
	b. Fell the back edge of the facings to the coat from the bottom to the top edge of the bottom turnup.	Hand		8-10	C (silk)	
	c. Tack the facings on the outside to the front edge of the inside pocket through the interlining with a hidden backstitch, extending for a distance of 5 inches down from, and in line with, the front end of the pocket opening.	Hand		4-6	C (silk)	
	d. Tack lower edge of the inside pocket to the facing-lining seam allowance through the coat front interlining.	Hand or 103		4-6 per tack 4-6	C (silk) A	
76.	Finish sword slit.					
	Finished appearance. The sword slit shall finish flat, smooth, firmly stitched and properly positioned with no puckers, bulges, or raw edges.					
	a. Properly position left front lining and baste to front around the top to hold in position for cutting of opening for sword slit tab.	Hand				
	b. Cut opening for sword slit tab in lining to correspond with opening in front.					
	c. Fell raw edges of lining at cut opening to front in order to hold lining in place.	Hand		6-8	C (silk)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
76.	Finish sword slit. (cont'd)					
	d. Cut 2-inch long opening in sword slit patch, 1/2 to 5/8 inch from top edge. The opening shall be 1 inch on each side of vertical center of patch.					
	e. Pull tab through opening to inside and insert the tab through the patch opening, aligned with the opening in the lining.					
	f. Fell patch to lining on all outer edges and around the raw edges at the opening to front waist seam allowance and the upper edge of tab.	Hand		6-8	C (silk)	
77.	Press left front.					
	a. Press left front smooth and flat, removing any fullness in order that front buttonholes may be made with less difficulty.					
78.	Make buttonholes.					
	Finished appearance. The buttonholes shall be clean cut, well made, properly positioned, well worked over gimp to fit a 40-line insignia button and the 34-line sewing hole button and with the stitching securely caught in the basic material. The gimp shall be pulled through to the underside of the front and the purling of the buttonholes shall be on the outside. The waist seam shall not be open beyond the end of the waist buttonhole.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
78.	Make buttonholes. (cont'd) a. Mark the left front in accordance with marks on the pattern for the location of four buttonholes. The mark for the bottom buttonhole shall be on the waist seam, the top buttonhole shall be on horizontal line with the eyelet of the buttonhole in the upper pocket flap, and the remaining two buttonholes shall be evenly spaced.					
	b. Make one horizontal eyelet-end square bar type cut-first buttonhole, 1-1/8 inches long, at each of the marks, with the purling of the buttonhole to finish on the outside of the front. The inside edge of the eyelet end of the buttonhole shall be 5/8 inch from the front edge. The buttonhole shall be well worked over gimp and the ends of the gimp shall be pulled through to the underside.	Buttonhole		50 per buttonhole (minimum) (not including bartack)	B (silk)	F
	c. Care should be exercised when making the buttonhole in the waist seam, so that the seam does not come open beyond the ends of the buttonhole.					
	d. Securely bartack the ends of each buttonhole, and trim the ends of the gimp and thread.	Bartack		21 per bartack (minimum)	B (silk)	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
79.	Make eyelets in pockets. Finished appearance. The eyelets shall be worked with the purling on the outside of the pocket and shall finish with a 1/8-inch diameter opening. All stitches shall be securely caught in the fabric. a. Make one eyelet in each pocket for removable insignia button, to correspond with eyelet-end of buttonhole in flaps so that when buttoned on the finished coat, flaps shall be smooth and flat without twists or bulges.	Eyelet		21 per eyelet	A (silk)	A
80.	Clean coat. a. Pull and remove all basting thread, trim and remove all loose ends of thread, and remove all spots, stains and shade tickets and markings without injury to the material.					
81.	Press coat. Finished appearance. The coat shall be well pressed throughout with a heated pressing iron or pressing machine of a type suitable to obtain the desired shape and appearance in accordance with good manufacturing practices. a. Press the fronts smooth and flat, straightening and shaping the front edges and working the fullness towards the chest. Care shall be exercised in pressing the fronts so that the bottom edges are even.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
81.	Press coat. (cont'd) b. Press the entire collar smooth and flat, smooth stretching where necessary to obtain the proper shape and to straighten the edges, working any fullness towards the center of the collar and removing the fullness by shrinking. c. Press the upper front on a body machine, shrinking in and properly shaping the chest. d. Press the lower front and pockets smooth and flat. e. Press the sides, working the fullness towards the back. f. Press the back smooth and flat, removing all fullness and lapping the left vent on the right vent. g. Press the sleeves smooth and flat, creasing at the backarm and the forearm. The backarm crease shall be on the backarm seam. The forearm crease shall extend uniformly to a point 1 to 1-1/2 inches above the bottom edge of the breast pockets. The backarm crease shall be in line with the forearm crease. h. Block the shoulders to remove the fullness and press shoulders smooth on a shoulder shaping machine with shoulder straps properly positioned over shoulder seam and pressed flat. i. Press the armholes solid from the inside, creasing the armholes on the front, back, and armpit. The armpit and the back of the armhole shall be held short while pressing.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
81.	Press coat. (cont'd) j. Block the armholes on a pressing buck, shrinking in the top sleeves. k. Press the lapels smooth and flat, straightening the edges and working any fullness towards the center of the lapel and removing the fullness by shrinking. l. Press the lapels, uniformly creasing on the lapel breakline from the gorge seam to approximately 3 inches above the top buttonhole, and then roll press the lapel to the front edge of the coat. m. Press the collar on a collar machine,creasing on the breakline and shaping to obtain the proper contour while pressing. n. Press lower edge of coat smooth, flat and even. o. Remove all wrinkles and impressions from under the lapels, collars, shoulder straps and pocket flaps. Press lining throughout, removing all wrinkles and creases. Press the front yoke lining pleats smooth and flat. Remove all gloss marks.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
82.	Mark for buttons. a. Mark the right front for the location of three 40-line insignia buttons and one 34-line sewing hole button to properly engage with the buttonholes in the left front. b. Mark each shoulder for the location of one 27-line insignia button to properly engage with the buttonhole in the shoulder straps in order that the straps shall lie smooth and flat without twisting or bulging on the finished coat. c. Mark the sword slit patch for the location of one 22-line sewing hole button to properly engage with buttonhole in tab.					
83.	Sew on buttons. Finished appearance. The buttons shall be securely sewn to the coat and shall properly engage buttonholes in left front and shoulder straps. The insignia buttons on the front and pockets shall finish with the head of the eagle in an upright position. The shoulder buttons shall finish with the head of the eagle towards the edge of the collar. When the coat is buttoned, the center of those buttons between the upper pockets shall be midway between the front edge of the pockets.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
83.	Sew on buttons. (cont'd)					
	a. Attach one 27-line insignia button to each pocket with shank of buttons inserted through eyelets and secured by ring toggles.					
	b. Sew one 40-line insignia button at each of the marks on the right front, except at the waist. The button shall be sewn through all plies of material with the head of the eagle in an upright position.	101 or 301 or Hand		21 per button 21 per button 8 per button double thread	20/4 20/4 20/4	 20/4
	c. Sew one 34-line sewing hole button at the waist mark on the right front through all plies, necking the button for shank wrapping.	101 or 301		21 per button 6-8 per button (double thread)	20/4 20/4	 20/4
	d. Shank wrap the 34-line sewing hole button.	Hand or Machine		4 wraps (double thread) 32 stitches per shank	20/4 20/4	
	e. Sew a 27-line insignia button at the mark on each shoulder. The button shall be sewn through all plies of material. The head of the eagle shall be towards the edge of the collar.	101 or 301 or Hand		21 per button 21 per button 8 per button (double thread)	20/4 20/4 20/4	 20/4
	f. Sew one 22-line sewing hole button at mark on sword slit patch and wrap not less than four times. Stitching shall catch the pocket stay material.	Hand		8 per button (double thread)	20/4	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

OPN NO.	OPERATION	Stitch Type	Seam or Stitch'g Type	Stitches Per Inch	THREAD	
					Needle	Bobbin or Looper
84.	Attach belt to coat. a. Place the belt in the belt loops with the belt fastener (standard belt) through the underloop and buttoned.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

* 3.7 Finished measurements. The finished coat shall conform to the measurements shown in Tables II and III.

Table II - Coat measurements 1/

Size	Breast 2/	Back length 3/	Sleeve length 4/	Belt length 5/
		SHORT		
	inches	inches	inches	inches
36	38	29-1/4	17	39-1/2
38	40	29-1/2	17	41-1/2
40	42	29-3/4	17	43-1/2
42	44	30	17	45-1/2
		REGULAR		
	inches	inches	inches	inches
36	38	30-1/4	18	39-1/2
38	40	30-1/2	18	41-1/2
40	42	30-3/4	18	43-1/2
42	44	31	18	45-1/2
44	46	31-1/4	18	47-1/2
46	48	31-1/2	18	49-1/2
		LONG		
	inches	inches	inches	inches
36	38	31-1/4	19	39-1/2
38	40	31-1/2	19	41-1/2
40	42	31-3/4	19	43-1/2
42	44	32	19	45-1/2
44	46	32-1/4	19	47-1/2
46	48	32-1/2	19	49-1/2
		EXTRA LONG		
	inches	inches	inches	inches
36	38	32-3/4	20	39-1/2
38	40	33	20	41-1/2
40	42	33-1/4	20	43-1/2
42	44	33-1/2	20	45-1/2
44	46	33-3/4	20	47-1/2

1/ Tolerance on all measurements: ±3/8 inch except tolerance on back length measurement only shall be +3/4 and -3/8 inch. Tolerance is on 1/2 breast measurement.

2/ Breast measurement shall be taken with coat buttoned from folded edge to folded edge 1 inch below pit of armhole and multiply by 2.

3/ Back length measurement shall be taken along center back seam from lower edge of undercollar to bottom edge of coat.

4/ Sleeve length measurement shall be taken along forearm seam from pit of armhole to bottom edge of cuff.

5/ Belt length measurement shall be taken along the center from end to end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Table III - Pocket and flap measurements 1/

UPPER POCKETS AND FLAPS

Size (Short, Regular, Long, X-Long)	36-38	40-42	44-46
	inches	inches	inches
Length of flap at center point.	2-7/8	2-7/8	2-7/8
Length of flap at sides.	2-1/8	2-1/8	2-1/8
Width of flap at top edge.	5	5-1/2	6
Width of pocket at top edge, side edge to side edge.	4-3/4	5-1/4	5-3/4
Width of pocket at bottom edge, side edge to side edge.	5-1/8	5-5/8	6-1/8
Length of pocket, top edge to bottom edge.	6-1/2	6-1/2	6-1/2

LOWER POCKETS AND FLAPS

Size (Short, Regular, Long, X-Long)	36-38	40-42	44-46
	inches	inches	inches
Length of flap at center point.	3-3/4	3-3/4	3-3/4
Length of flap at sides.	2-1/4	2-1/4	2-1/4
Width of flap at top edge.	7-3/4	8-1/4	8-3/4
Width of pocket at top edge, side edge to side edge.	7-1/2	8	8-1/2
Width of pocket at bottom edge, side edge to side edge.	10	10-1/2	11
Length of pocket, top to bottom edge:			
Short	10-1/2	10-1/2	10-1/2
Regular	10-3/4	10-3/4	10-3/4
Long	11	11	11
X-Long	11-3/4	11-3/4	11-3/4

1/ Tolerance on all measurements: ±1/8 inch.

*3.8 Workmanship. The finished coats shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

*4.2.1 First article. When first article is required, inspection shall be performed on a completely fabricated coat for conformance to all provisions of this specification.

*4.2.2 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all the requirements of referenced specifications, figures and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, figures and standards testing shall be performed on components listed in Table IV for characteristics noted. Wherever applicable, tests shall be conducted in accordance with FED-STD-191. All test reports shall contain individual values utilized in expressing the final results.

*4.2.2.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following:

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein. The unit for expressing lot size and sample unit for testing component shall be in accordance with applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Hanger braid	yards	3 yards
Fastener, snap	1000 sets	15 complete sets

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Table IV - Test methods

Components	Characteristics	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Hanger	Color	3.3.13	Visual	1	Pass or fail
	Width-in	3.3.13	Visual	1	Pass or fail
	Breaking strength-lb.	3.3.13	4102	5	Avg. of det. to the nearest whole number
	Material identification 1/	3.3.13	1200 1500 or 1510	1	Pass or fail
	Colorfastness to:				
	-wet (dry) cleaning	3.3.13	5622	1	Good, fair or poor
	-crocking	3.3.13	5651.1	1	Good, fair or poor
Fasteners, snap	Material identification 1/	3.3.17	Std. Comml	1	Pass or fail
	Finish	3.3.17	Std. Comml	1	Pass or fail
	Size and type	3.3.17	Std. Comml	1	Pass or fail

1/ Accept a certificate of compliance for this requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

*4.2.2.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

*4.2.3 Examination of end items. The end item shall be examined for defects listed in 4.2.3.2, 4.2.3.3, 4.2.3.4, 4.2.3.5 and 4.2.3.6. The sample unit shall be one coat.

*4.2.3.1 Classification of defects. All defects shall be classified as indicated below except those with an asterisk (*) in classification column which shall be classified as:

Major defect - When seriously affecting appearance or serviceability.
Minor A defect - When affecting appearance or serviceability, but not seriously.

*4.2.3.2 General defects. General defects shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Bartacks	One or more more missing, loose or misplaced (except bartacks on buttonholes).		X	
Buttonholes (construction)	a. One or more omitted, added or wrong type.	X		
	b. Not corresponding to size of button (front, flaps and shoulder loop): -too small, not permitting button to enter buttonhole.	X		
	-too large, 3/8 inch or more longer than the diameter of button (measured at inside of purling).		X	
	c. Buttonhole not securely caught on fabric, causing stitching to pull away from fabric.	X		
	d. Bartack missing or loose on: -one front buttonhole.		X	
	-two or more front button-holes.	X		
	-one or more flap and shoulder loop buttonholes.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	e. Bartack misplaced, not serving intended purpose on one or more buttonholes:			
	-front buttonholes.		X	
	-flap buttonholes.			X
	-shoulder loop buttonholes.			X
	f. One or more broken stitches in:			
	-one buttonhole.		X	
	-two or more buttonholes.	X		
	g. More than two skipped stitches in:			
	-one buttonhole.			X
	-two or more buttonholes.		X	
	h. Ragged edges, affecting appearance.			X
	i. Any uncut buttonhole.		X	
	j. Gimp omitted in one or more buttonholes or ends of gimp not pulled through to underside (except belt and belt fastener buttonholes).		X	
	k. Stitches per buttonhole (not including bartack) less than the minimum specified:			
	-one or two stitches.			X
	-three or more stitches.		X	
	l. One or more buttonholes finished with purling on the underside (except belt and and fastener buttonholes).	X		
	m. Belt or belt fastener buttonhole finished with purling on underside.			X
Buttons	a. One or more missing, loose, defective or improper size or type or color finish.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	b. One or more buttons on front or pockets sewn with the head of the eagle in other than upright position.			X
	c. One or both shoulder buttons not sewn with the head of the eagle toward the edge of collar.			X
	d. Bottom button on front not shank wrapped.		X	

NOTE: Buttons shall be considered defective if they have sharp, rough, cracked, or split edges; unsound soldering scratches, dents, blemished or imbedded foreign matter; loose or bent shanks; or are poorly plated or badly shaded.

Cleanness	a. Any spot or stain clearly noticeable: -on outside.	X		
	-on inside.			X
	b. Thread ends not trimmed throughout garment, or one or more bastings not removed, or two or more shade tickets not removed.			X
	c. Any residue of synthetic thread, when used, not brushed or removed.			X
Components and assembly	a. Any component part or required operation omitted (not herein classified).	*		
	b. Any defective component or defect of assembly (not herein classified).	*		
Cutting	a. Any component part of basic material not cut in accordance with directional lines on patterns, or in accordance with specification requirements.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	b. Any lining part not cut in accordance with directional lines on patterns or in accordance with specification requirements.			X
Eyelets (construction)	a. One or more omitted or added.	X		
	b. Wrong type.			X
	c. Eyelet not securely caught on fabric, causing stitching to pull away from fabric.	X		
	d. Diameter of inside opening less than 1/8 inch or more than 1/4 inch.			X
	e. One or both eyelets uncut.		X	
	f. One or more broken stitches in: -one eyelet.			X
	-two eyelets.		X	
	g. More than two skipped stitches in one or both eyelets.			X
	h. Purling not on outside of collar.			X
Material defects and damages	a. Any weakening defect such as smash, multiple float, and loose slub.	*		
	b. Any hole.	*		
	c. Shade bar, unsightly slub, etc., affecting appearance: -on outside.	*		
	-on inside.		X	
	d. Scissors or knife cut, tear, mend, or burn.	*		
	e. Needle chews that may develop into a hole.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
NOTE: Material defects and workmanship damages are to be classified as indicated above only when the condition weakens the fabric or when it is conspicuously located. Nonweakening conditions which are inconspicuous and have negligible effect on serviceability are to be classified as follows:				
	Material defect Workmanship damages — No defect Minor B defect			
Pressing	a. Burned or scorched.	*		
	b. Pressing omitted on entire garment.		X	
	c. Armhole stretched.	*		
	d. Poorly pressed (unless otherwise indicated).			X
	e. Basting or pressing impressions not removed.			X
	f. Gloss not removed.			X
	g. Armholes not blocked or poorly blocked.		X	
	h. Edges bulky, i.e. not pressed solid.		X	
	i. Inside of armhole not creased as required.		X	
	j. Armhole seam not pressed open across top as required.		X	
	k. Sleeve not creased at front or backarm seam as specified.			X
	l. Wrinkles or pressing impressions not removed under pocket flap, collar, lapels, and shoulder straps.			X
	m. Linings not pressed smooth.			X
	n. Belt not pressed or poorly pressed.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Seams and stitching	a. Accuracy of seaming:			
	1. Any seam twisted, gathered, puckered or pleated.		X	
	2. Part of garment caught in any unrelated operation or stitching.	*		
	3. Unsightly hand felling or blindstitching exposed on outside of coat, affecting appearance.		X	
	4. Ends of all stitching (when not caught in other seams or stitching) not backtacked or backstitched as required.			X
	5. Wrong color of thread or two shades of thread used on outside of coat, affecting appearance.	*		
	b. Gage of stitching (edge or raised stitching):			
	1. Irregular, i.e., unevenly gaged, or various stitchings not uniform, affecting appearance.			
	2. Beyond range of width specified or varies more than 1/16 inch when no range is specified.			X
	c. Open seams			
	1. On outside 1/ (except pocket binding):			
	-up to 1/4 inch inclusive.			X
	-more than 1/4 inch but not more than 1/2 inch.		X	
	-more than 1/2 inch.	X		
	2. -Any open seam on pocket binding:			
	-up to 1/4 inch inclusive.			X
	-more than 1/4 inch.		X	

1/ Any open seam on undercollar shall be scored as open seam on the outside of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	3. On inside (including binding):			
	-more than 1/2 inch (except machine felling).		X	
	-up to 1/2 inch inclusive (except machine felling).			X
	-up to 1 inch inclusive (machine felling).			X
	-more than 1 inch (machine felling).		X	

NOTE: One or more broken stitches or two or more continuous skipped or run-off stitches constitute an open seam.

	d. Raw edge:			
	1. On outside:			
	-up to 1/8 inch inclusive.			X
	-more than 1/8 inch but not more than 1/4 inch.		X	
	-more than 1/4 inch.	X		
	2. On inside:			
	-more than 1/8 inch but not more than 1/4 inch.			X
	-more than 1/4 inch.		X	

NOTE: Raw edges shall be classified as such when they occur at places where an edge is required to be turned under. Raw edges not caught in stitching shall be classified as an open seam.

	e. Run-offs (see classification of open seams).			
	f. Stitch tension:			
	1. Loose tension resulting in loose seam.	X		
	2. Loose tension on raised or edge stitching, resulting in loosely exposed bobbin or top thread.			X
	3. Tight tension (stitches break when normal strain is applied).	X		

NOTE: Puckering is evidence of tight tension. When puckering is evident, the inspector shall test seam by exerting pull in lengthwise direction of seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	g. Stitches per inch (including labels) less than minimum specified:			
	-one or two stitches.			X
	-three stitches.		X	
	-four or more stitches.	X		
	-one or more stitches on labels.			X
	NOTE: To be scored only if condition exists on major portion of seam.			
	h. Wrong stitch or seam type.		X	
	i. Stitching skipped or broken (on edge or raised stitching when seam is seamed, turned and stitched):			
	-1/4 inch or more but not more than 1/2 inch.			X
	-more than 1/2 inch.		X	
Shaded parts	a. Any outside part shaded, (except undercollar parts, belt loops, keeper, belt lining, or under ply of shoulder strap).	*		
	b. Belt loop, belt keeper, belt lining, or under ply of shoulder strap badly shaded.			X
	c. Undercollar parts badly shaded.			X
	d. Any lining part badly shaded, (except sleeve lining parts, and pair of sleeve linings).		X	
	e. Sleeve lining parts badly shaded or pairs of sleeve linings not matching each other.			X

*4.2.3.3 Detailed defects (coat buttoned on form). Detailed defects with coat buttoned on form shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Alignment of buttons and buttonholes	a. Not aligned, causing a noticeable bulge or twist on fronts when buttoned.		X	
	b. Alignment of top front button with upper pocket flap buttons out of horizontal alignment: -by more than 3/8 inch but not more than 1/2 inch.		X	
	- by more than 1/2 inch.	X		
	NOTE: Center of each button (front and flaps) shall be the specific points for observing whether or not they are in horizontal alignment with each other.			
	c. Center of buttons more than 3/8 inch off center midway between front edges of upper pocket when coat is buttoned.			X
	d. Center of top front button (shank) attached to base of right lapel directly above step line for the button stand in lieu of position applicable to Government pattern.		X	
Alignment of front waist seams	Out of horizontal alignment by more than 1/4 inch.		X	
Length of buttoned fronts	a. Left front at corner shorter than right front at bottom by: -more than 1/8 inch but not more than 1/4 inch.		X	
	-more than 1/4 inch.	X		
	b. Left front at corner longer than right front by: - more than 1/4 inch but not more than 3/8 inch.			X
	-more than 3/8 inch.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	c. Right front at corner exposed beyond bottom edge of left front by more than 1/8 inch.		X	
Pocket alignment (position and construction)	a. Flaps (all flaps):			
	1. Lining tight or twisted, causing fullness or twist on flaps, affecting appearance.	*		
	2. Overedge stitching on upper edge of flap omitted on:			
	-one flap.			X
	-two or more flaps.		X	
	3. Lining exposed on edge of flap, affecting appearance.		X	
	4. Poorly shaped, not in conformity with flap shaper.	*		
	5. Stitching joining flaps to fronts not caught through silesia staypiece.		X	
	6. Corners of flaps not securely backstitched.		X	
	b. Upper pocket flaps:			
	1. Out of horizontal alignment 1/ by:			
	-1/4 inch or more but not more than 3/8 inch.			X
	-more than 3/8 inch.	X		
	2. Flap not covering pocket opening:			
	-front corner of one or both pockets.	X		
	-back corner of one pocket.			X
	-back corner of both pockets.		X	
	3. Lower side of flap edge extending beyond one or both edges of one or both pockets by 1/8 inch or more.		X	

1/ The following focal points shall be observed for determining horizontal alignment of flaps, and patch pockets: Top front corners of flaps closest to front edge of coat and front bottom edge (excluding front rounded corners) of breast patch pockets, closest to front edge of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	4. Lower side edge of flap (excluding rounded corners) not covering side edge of pocket by less than 1/8 inch or more than 3/16 inch:		
	-front edge of one or both pockets.	X	
	-back edge of one or both pockets.		X
	5. Point of breast pocket flap from center of pocket pleat:		
	-more than 1/8 inch but not more than 1/4 inch.		X
	-more than 1/4 inch.	X	
	6. Stay piece not tacked or not securely tacked to interlining across top edge or front center.		X
	7. Silesia staypiece omitted on underside of one or both pockets.	X	
	8. Top edge of pocket less than 3/8 inch or more than 5/8 inch below the top stitching of flap.		X
	9. Top edge of flap crooked.	X	
	c. Flap buttonholes (position):		
	1. Position of buttonholes from pointed edge of flap (measured to inside edge of eyelet):		
	-less than 1/2 inch or more than 3/4 inch.	X	
	2. Out of alignment with point at center of flap by more than 1/8 inch.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	d. Upper pockets:			
	1. Binding on top edge omitted or not securely caught to fabric, causing binding to pull away from fabric.		X	
	2. One or both corners not securely tacked.		X	
	3. Pleat off center 1/4 inch or more at lower edge of flap.		X	
	4. Pleat formed crookedly, affecting appearance.		X	
	5. Poorly shaped, not in conformity with pocket shaper.	*		
	6. Constructed with fold of pleat on the underside.	X		
	7. Pleat less than 1-3/8 inches or more than 1-5/8 inches wide.			X
	8. Front edge of pleat below flap not parallel with front edge of pocket by more than 3/16 inch.		X	
	9. Pleat not stitched closed.			X
	10. Bottoms of pockets out of horizontal alignment 1/ by:			
	-1/4 inch or more but not more than 3/8 inch.		X	
	-more than 3/8 inch.	X		
	11. Front edge of pocket not parallel with front edge of coat when buttoned by:			
	-1/8 inch or more but not more than 1/4 inch.		X	
	-more than 1/4 inch.	X		

1/ The following focal points shall be observed for determining horizontal alignment of flaps, and patch pockets: Top front corners of flaps closest to front edge of coat and front bottom edge (excluding front rounded corners) of breast patch pockets; and bottom front corners of lower patch pockets, closest to front edge of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	12. Excessive fullness or tightness at pocket opening, affecting appearance.	X	
	13. Button and buttonhole not aligned, causing a noticeable bulge or twist on pocket or flap when buttoned, affecting appearance.	X	
	14. Lower corners of pocket not trimmed, causing bulkiness, affecting appearance.	X	
	15. Silesia tight or short, causing fullness or puckers on outside of pocket.	X	
	e. Upper pockets and flaps measurements:		
	1. Length of flap (at center point) length of flap (at sides), width of flap (at top edges), width of pocket (at top edge, side to side edge), width of pocket (at bottom edge, side to side edge), length of pocket (top to bottom edge). Any of the above dimensions and tolerances included in Table III:		
	-by more than the tolerance but not more than twice the tolerance.		X
	-by more than twice the tolerance.	X	
	f. Lower pocket flaps (position):		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	1. Out of horizontal alignment 1/ by:			
	-3/8 inch or more but not more than 5/8 inch.		X	
	-more than 5/8 inch.	X		
	2. Flap not covering pocket opening:			
	-front corner of one or both pockets.	X		
	-back corner of one pocket.			X
	-back corner of both pockets.		X	
	3. Lower side edge of flap extending beyond one or both edges of one or both pockets by more than 3/16 inch.			X
	4. Front edge of flap out of vertical alignment with front edge of upper pocket by 3/8 inch or more.		X	
	5. Lower side edge of flap (excluding rounded corners) not covering side edge of pocket by 1/8 inch or more but not more than 1/4 inch:			
	-front edge of one or both pockets.		X	
	-back edge of one or both pockets.			X
	6. Front edge of flaps more than 1/4 inch from front edge of one or both pockets.		X	
	7. Back edge of flaps more than 1/4 inch from back edge of one or both pockets.		X	
	8. Front edge of flaps not parallel with front edge of of coat by 1/4 inch or more when coat is buttoned.		X	
	9. Silesia staypiece not tacked or not securely tacked to interlining at front corner.		X	

1/ The following focal points shall be observed for determining horizontal alignment of flaps, and patch pockets: Top front corners of flaps closest to front edge of coat and front bottom edge (excluding front rounded corners) of breast patch pockets; and bottom front corners of lower patch pockets, closest to front edge of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	10. Silesia staypiece omitted on underside of one or both pockets.		X	
	11. Top edge of flap not parallel with the waist seam by 1/4 inch or more.		X	
	g. Lower pockets:			
	1. Binding on top edge omitted or not securely caught in fabric, causing binding to pull away from fabric.		X	
	2. One or both pocket corners not securely stitched.		X	
	3. Pockets poorly shaped, not in conformity with pocket shaper.	*		
	4. Distance between bottom edge of lower pocket and bottom edge of coat:			
	-less than 1/4 inch but not less than 1 inch.			X
	-less than 1 inch.		X	
	5. Bottom edge of pocket not parallel with bottom edge of coat by:			
	-1/4 inch or more.		X	
	6. Bottoms of pockets out of horizontal alignment 1/ by:			
	-more than 1/4 inch but not more than 1/2 inch.		X	
	-more than 1/2 inch.	X		
	7. Excessive fullness or tightness at pocket opening, affecting appearance.		X	

1/ The following focal points shall be observed for determining horizontal alignment of flaps, and patch pockets: Top front corners of flaps closest to front edge of coat and front bottom edge (excluding front rounded corners) of breast patch pockets; and bottom front corners of lower patch pockets, closest to front edge of coat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	8. Diagonal position of pocket (front edge from directly below flap to bottom edge) with front edge of coat:		
	-parallel with front edge.		X
	-slanted more than 3/8 inch from front edge (i.e., toward side seam).	X	
	9. Button and buttonhole not aligned, causing a noticeable bulge or twist on pocket or flap.	X	
	10. Silesia tight or short, causing fullness or puckers on outside of pocket.	X	
	h. Lower pockets and flaps measurements.		
	1. Length of flap (at center point), length of flap (at sides), width of flap (at top edge), width of pocket (at top edge, side to side edge), width of pocket (at bottom edge, side edge to side edge), length of pocket (top to bottom edge). Any of the above dimensions varying from nominal dimensions and tolerances included in Table III:		
	-by more than the tolerance but not more than twice the tolerance.		X
	-by more than twice the tolerance.	X	
Snap fasteners (flaps)	a. Any missing, loose, broken, defective, or mismated.	X	
	b. Not specified type, size or finish.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	c. Machine or hand tacking stitches omitted or insecure on one or more fasteners.			X
	d. Snap fasteners sewn in a reversed position (i.e., stud sewn to pocket or socket sewn to corner of flap linings).			X
	e. Fasteners exposed beyond edge of flap.		X	
	f. Outside surface of flap puckered in stitching, affecting appearance.			X
	g. Positioned more than 1/2 inch from bottom or side edges of flaps.			X
	h. Not aligned, causing a noticeable bulge or twist on flap when fastened.		X	
Collar (construction and setting)	a. Short, i.e., causing puckers on back or fronts or pulling lapel breakline, causing fronts to roll out.	*		
	b. Long, i.e., setting away from neck or lapel, not rolling to within 1 inch of top front bottom or buttonhole.	*		
	c. Collar not properly set, causing a decided curve or bulge on creaseline at joining to gorge seam.	*		
	d. Tight at joining to gorge seam or across back, causing fullness on lapels or fullness or pleats across outside back.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	e. Eyelet positioned from outer edges of collar:		
	-less than 7/8 inch but not less than 3/4 inch.		X
	-more than 1-1/8 inches but not more than 1-1/4 inches.		X
	-more than 1-1/4 inches or less than 3/4 inch.	X	
	f. Gorge seam:		
	1. Seam not spread open.	X	
	2. Not straight.	X	
	3. Tacking omitted or insecure.		X
	g. Collar edge:		
	1. Crooked.	X	
	2. Undercollar exposed along collar edge for distance of 3/8 inch or more.	X	
	h. Tacking on ends of collar to lapels omitted or insecure.	X	
	i. Topcollar:		
	1. Tight, i.e., causing edges to curl or bulging on undercollar.	*	
	2. Twisted, i.e., having a diagonal twist.	*	
	3. Full, i.e., having excessive puckers or fullness.	*	
	4. Full, i.e., collar folds 1/8 inch or more from creased edge of under-collar.	X	
	j. Undercollar:		
	1. Interlining pleated or twisted, affecting smoothness of topcollar.	*	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	2. Interlining tight or twisted, causing puckers on under-collar.			X
	3. Tight at joining to fronts or back, causing puckers or pleats at neck of coat.	*		
	4. Center seam more than 1/4 inch from center back seam.			X
	5. Center seam not pressed open.		X	
	6. Undercollar stand less than 1-1/8 inches or more than 1-3/8 inches wide at center.		X	
Lapels	a. Lapel facings:			
	1. Twisted, short or tight, causing lapels to curl out.	*		
	2. Fullness or puckers.	X		
	b. Lapel edges:			
	1. Bulky, irregular, or not properly forced out, causing crooked edges.		X	
	2. Front part exposed on lapel edge.		X	
	c. Bridle tape			
	1. Misplaced, not serving intended purpose.			X
	2. Tape partly on creased edge or on lapel side.			X
	d. Collar and lapel shape:			
	1. Not uniform, i.e., left and right top edge of lapels or lower ends of collar vary in length by 1/4 inch or more.		X	
	2. Pointed ends poorly shaped or not of uniform shape.		X	
	3. Lapels poorly shaped or not of uniform size or shape.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	4. Length of collar and lapel notch less than 1-1/2 inches or more than 1-3/4 inches.		X	
	5. Finished width of lapels (measured across upper portion of lapel on a straight line from outer edge of lapel to lapel breakline) less than 2-7/8 inches or more than 3-1/8 inches.		X	
Shoulder (construction)	a. Improperly joined or set, causing shoulders to twist.	*		
Shoulder pads	a. Not completely caught in armhole tacking.		X	
	b. Misplaced, not serving intended purpose, i.e., too far back or too far forward.		X	
	c. One or both pads omitted.	X		
Shoulder straps	a. Misplaced so that it will not lie flat when buttoned, causing bulge or twist on strap.		X	
	b. Button not aligned with buttonhole, causing bulge or twist on strap or puckers on shoulder.		X	
	c. Short, i.e., rounded area of strap not completely covered by collar.		X	
	d. Long, i.e., rounded end extending beyond collar creaseline.	X		
	e. Misplaced so that shoulder seam is exposed (except rounded end).	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	f. Misplaced, i.e., one strap further forward or back from position of other strap.		X	
	g. Upperside of strap full, twisted or exposed along edge of strap.			X
	h. Less than 2-1/4 inches or more that 2-1/2 inches wide at armhole.			X
	i. Less than 1-5/8 inches or more than 1-7/8 inches wide across center of buttonhole.			X
	j. Buttonhole 1/4 inch or more off center.		X	
	k. Buttonhole finished with purling on the underside.		X	
	l. Button misplaced, i.e., back of shoulder seam, or on seam line of shoulder seam or more than 5/8 inch from collar edge.		X	
	m. Button less than 1/4 inch from collar edge but not extending under collar edge.			X
	n. Button more than 1/2 inch but not more than 5/8 inch from collar edge.			
	o. Button partially covered by collar edge, or edge of button extending beyond collar edge.		X	
	p. Buttons not uniformly set by more than 1/4 inch.		X	
	q. Button entirely covered by collar edge.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	r. Back edge of strap less than 1/4 inch or more than 3/8 inch from shoulder seam at armhole.		X	
	s. Button not sewn thru all plies.		X	
Armholes (construction)	a. Badly stretched.	*		
	b. Taped too light, causing puckering around armhole seam, affecting appearance.	*		
	c. Crooked seam.			X
	d. Tape stitching exposed and visible on outside surface.			X
	e. Sleeve head pads not completely tacked to armholes, or misplaced, not serving intended purpose.		X	
	f. One or both sleeve head pads omitted.		X	
	g. Armhole not tacked completely, or insecurely tacked.		X	
Sleeves	a. Setting and hang:			
	1. Sleeve fullness misplaced at one or both armholes.		X	
	2. Sleeve tight, i.e., front or back parts of sleeve not having roll effect at one or both armholes.	*		
	3. Sleeve too far front or back, i.e., front edge of sleeve away from back edge of lower flap button by:			
	-more than 1 inch but not more than 2 inches.			X
	-more than 2 inches.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	4. Sleeve lining twisted, tight or short, causing bulge or puckering on outside of sleeve.	*		
	5. Sleeve lining too long, causing lining to bag at bottom more than 1/2 inch.			X
	6. Sleeve back seam unequal distance from shoulder seams by 1/2 inch or more.		X	
	b. Construction of sleeves:			
	1. Sleeve lining seams out of alignment more than 3/4 inch with sleeve seams at armhole or bottom of sleeves.			X
	2. Sleeve bottom edge uneven by more than 1/4 inch.			X
	3. Tacking on bottom turnup to sleeve:			
	-omitted on one or both sleeves.		X	
	-insecure on one or both sleeves.			X
	4. Tacking omitted or insecure on sleeve lining seam to sleeve seam on:			
	-one or both seams of one sleeve.			X
	-one or both seams of both sleeves.		X	
	c. Sleeve cuffs			
	1. Height of cuffs at front and back edges:			
	-less than 3 inches but not less than 2-7/8 inches.			X
	-more than 3-1/2 inches but not more than 3-5/8 inches.			X
	-more than 3-5/8 inches or less than 2-7/8 inches.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	2. Height of cuffs at point on top sleeve:			
	-less than 5-3/4 inches but not less than 5-5/8 inches.			X
	-more than 6-1/4 inches but not more than 6-3/8 inches.			X
	-more than 6-3/8 inches or less than 5-5/8 inches.		X	
	3. Top edge on top sleeve part poorly shaped.		X	
	4. Height of pointed end on both sleeves varying in length by 1/4 inch or more.		X	
	5. The point of cuff not centered between lower backarm and forearm creased edges of sleeves by more than 1/4 inch.		X	
Body (outside)	a. Fitting of body and yoke linings:			
	1. Tight, short, or twisted, causing fullness or twist on outside of coat.	*		
	b. Fitting of front interlining:			
	1. Tight, short, or twisted, causing fullness or twist on outside of coat.	*		
	2. Too full, causing coat front to have a wavy appearance.	*		
Waist Seam	a. Seam not pressed open.		X	
	b. Seam stretched, affecting appearance.		X	
	c. Tape set on tight, causing puckering on waist seam, affecting appearance.		X	
	d. Tape omitted on one or both seams.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Sword slit opening	a. Length of opening: -less than 1-7/8 inches but not less than 1-5/8 inches, more than 2-1/8 inches but not more than 2-1/4 inches.			X
	-less than 1-5/8 inches or more than 2-1/4 inches.		X	
	b. Back end placed less than 3/8 inch or more than 3/4 inch forward of underarm seam.		X	
	c. Omitted, placed on right front or not through waist seam.	X		
	d. Ends of opening not securely tacked.		X	
	e. Tacking to front omitted or insecure on one or both sides.		X	
Waist darts	Seams not pressed open.		X	
Front and bottom edges	a. Front edges stretched, affecting appearance.		X	
	b. Silesia tape set on tight, causing puckering on front edge.		X	
	c. Bottom edge stretched or uneven.			X
	d. Bottom edge puckered.		X	
	e. Fronts rolling outward below bottom button.	*		
	f. Front edge irregular or not properly forced out, causing crooked or curved edges.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	g. Facing exposed on left front edge (score only when clearly noticeable and the condition exists along major portion of seam).			X
	h. Bottom corner of left front poorly shaped.		X	
	i. Binding tight on bottom hem, causing puckering on outside of coat.		X	
	j. Left front edge below bottom button not in vertical upright position, i.e., overlapping right front towards patch pocket on an angle or positioned on an angle away from patch pocket on right front.		X	
	k. Left forepart overlapping right forepart at bottom edge of coat less than 4 inches or more than 4-1/2 inches.			X
Front facing	a. Short, tight, or twisted, causing fullness or twists on fronts.	*		
	b. Facing long, causing bottom corner to curl up.			

*4.2.3.4 Detailed defects (coat unbuttoned on form or on table). Detailed defects with coat unbuttoned on form or on table shall be classified as follows:

Examine	Defect	Classification Major (*)	Minor A	Minor B
Front buttons (position and secure sewing)	a. Out of vertical alignment by 1/4 inch or more.		X	
	b. Button stitching not caught through interlining (coat front interlining) on one or more buttons.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	c. Button stitching caught through interlining (coat front interlining) but not facing:		
	-on one button.		X
	-on two or more buttons.	X	
Front buttonholes	a. Position		
	1. Unevenly spaced from edge by more than 1/8 inch.	X	
	2. More than 1/4 inch from equal spacing.	X	
	3. Bottom buttonhole above or below waist seam.	X	
	b. Length of buttonholes:		
	-less than 1 inch.	X	
	-more than 1-1/4 inches.		X
	c. Position from front edge		
	-less than 5/8 inch but not less than 3/8 inch or more than 3/4 inch but not more than 7/8 inch.		X
	-less than 3/8 inch or more than 7/8 inch.	X	
Belt loops	a. Loops 3/8 inch or less or more than 5/8 inch wide.		X
	b. Length of belt loops measured from top to bottom folded edges:		
	-less than 2-3/8 inches but not less than 2-1/4 inches.		X
	-more than 2-5/8 inches but not more than 2-3/4 inches.		X
	-less than 2-1/4 inches or more than 2-3/4 inches.	X	
	c. Loop set on an angle.	X	
	d. Bottom folded edge of loop more than 1/4 inch above top edge of lower flap or bartacked through double fold, exposing bartack.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	e. Not aligned by:			
	-more than 1/4 inch but not more than 1/2 inch.			X
	-more than 1/2 inch.		X	
	f. one or both loops omitted.	X		
	g. one or both ends incorrectly stitched:			
	-on one loop.		X	
	-on both loops.	X		
	h. Position:			
	1. For sizes 36 to 40 inclusive, less than 1/8 inch or more than 3/8 inch back of underarm seam.			X
	2. For sizes 42 to 46 inclusive, less than 1/8 inch or more than 3/8 inch forward of underarm seam.			X
	i. Underloop on left side omitted.		X	
	j. Length of underloop opening on left side:			
	-less than 1-3/4 inches but not less than 1-1/2 inches or more than 2 inches.			X
	-less than 1-1/2 inches,		X	
	k. Top folded end of loop bartacked to forepart less than 1/8 inch or more than 1/4 inch from folded end,			X
Belt (construction)	a. Interlining omitted.	X		
	b. Spliced.	X		
	c. Lining exposed beyond finished edges of belt, affecting appearance.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	d. Pointed end poorly shaped.		X
	e. Square end of belt not serge stitched.		X
	f. Interlining or lining short, tight or twisted, causing fullness or twists on outside of belt, affecting appearance.	X	
	g. Finished width of belt: -less than 1-5/8 inches.	X	
	-more than 1-13/16 inches.		X
	h. Irregular in width by 3/16 inch or more.	X	
	i. Excessive fullness or pleats on lining,not affecting smoothness on outside of belt.		X
	j. Interlining trimmed 1-1/4 inches or more from pointed end of belt or top or underply not seamed prior to stitching the pointed end closed.	X	
	k. Buttonhole (position):		
	1. Center of buttonhole less than 7/8 inch or more than 1-1/8 inches from the buckle end.		X
	2. One or both ends of buttonhole not securely tacked.		X
	3. Buttonhole off-center with width of belt by 1/4 inch or more.		X
	l. Buttons (position)		
	1. Outside of the belt distorted in sewing of button for belt fastener.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
	2. Button to engage buttonhole on buckle end of belt less than 3-1/2 inches or more than 3-3/4 inches from serged end of belt.			X
	3. Button for belt fastener sewn through outside surface of belt.			X
	4. One or both buttons out of alignment with buttonholes, causing outside of belt to pucker or twist.			X
	5. Button not sewn through all plies at square end of belt.		X	
	6. Misplaced, causing turnback to be exposed beyond edge of belt.			X
	m. Belt keeper:			
	1. Omitted.	X		
	2. Belt keeper finished less than 3/8 inch or more than 5/8 inch wide.			X
	3. Belt keeper short, constricting belt.		X	
	4. Length of belt keeper measured from bartack to folded end less than 2 inches, but not constricting belt, or more than 2-1/4 inches long.			X
	5. Ends of keeper joined without bartack or insecurely bartacked.			X
	6. Set with covering stitch on outside.		X	
	n. Belt fastener:			
	1. Omitted.		X	
	2. Finished width of fastener less than 1/2 inch or more than 5/8 inch wide.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	3. Buttonhole end of fastener turned under less than 1-1/4 inches.		X
	4. Buttonhole not made through folded end of fastener.	X	
	5. One or both ends of buttonhole not securely tacked.		X
	6. Belt fastener not properly positioned on lining in accordance with marks on patterns, affecting functioning of belt on coat.	X	
	7. Raw end of fastener not turned under or not bartacked through all plies of belt.	X	
	8. Bartack poorly constructed, i.e., having an objectionable appearance on the outside of belt.	X	
	o. Snap fasteners (belt):		
	1. Any missing, loose, defective or mismated.	X	
	2. Not specified type, size or finish.		X
	3. Outside surface of belt puckered in stitching.		X
	4. Not aligned, causing a noticeable bulge or twist on belt when fastened.	X	
	5. Stitching caught through outside surface of belt.	X	
	6. Stitching not caught through interlining.		X
	7. Socket positioned less than 1/2 inch or more than 5/8 inch from point of belt.		X
	8. Stud positioned less than 3-1/2 inches or more than 3-3/4 inches from folded end of belt.		X
	9. Reversed, i.e., socket positioned on square end or stud on pointed end.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*)	Minor A	Minor B
Upper pockets (tacking of stay piece of interlining)	Tacking above top edge and front end to one or both interlinings:			
	-omitted.		X	
	-insecure.			X
Lower pockets (tacking of stay piece to interlinings)	Tacking at top edge and front corner to one or both interlinings:			
	-omitted.		X	
	-insecure.			X
Vent opening	a. Left vent stretched, causing vents to spread open.	X		
	b. Row of stitching across top of vent opening omitted, insecure, or not stitched through lining.		X	
	c. Row of stitching across top of vent opening less than 1-3/8 inches or more than 1-5/8 inches in length.			X
	d. Left vent 3/16 inch or more shorter than right vent.		X	
	e. Left vent 1/4 inch or more longer than right vent.			X
	f. Left vent edge crooked.		X	
	g. Bottom turnup exposed and visible on left vent edge.			X
	h. Left vent overlapping right vent at bottom of coat less than 3-1/4 inches or more than 3-3/4 inches.			X
	i. Row of top stitching omitted on folded edge of left vent.		X	

*4.2.3.5 **Detailed defects (inside of coat** with coat spread out on table). Detailed defects on inside of coat with coat spread out on table shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
Identification label	a. Missing, incorrect or illegible.	X	
	b. Not stitched on four sides.		X
	c. Stock number missing (when stock number is not included in size label).		X
Size label	a. Missing, incorrect, or illegible.	X	
	b. Not securely caught in stitching.	X	
Hanger	a. Omitted or one or both ends not securely stitched.	X	
	b. Less than 1-7/8 inches or more than 2-1/8 inches long measured along the lower edge of top-collar.		X
Right vent lining	a. Top edge not completely covering edge of center back seam outlets.	X	
	b. Felling across top of lining omitted or felling from top of vent extending down sides for a distance of less than 3/4 inch.	X	
	c. Felling at corners of vent openings omitted or insecure.	X	
	d. Folded edge of lining not extending beyond center seam allowance of right backpart.		X
	e. Tight, short, or twisted, causing fullness or twist outside of coat.	X	
Front facings (construction and tacking on back edge to inter-linings)	a. Felling at back edge of facing across width of bottom turnup omitted or insecure.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	b. Fullness or pleats on facings between buttons, buttonholes, or between front edge and buttons or buttonholes.		X
	c. Tacking on back edge to one or both interlinings: -omitted.	X	
	-insecure or incomplete for a distance of more than 2-1/2 inches below shoulder seam, more than 2 inches above bottom of body lining, or more than 1 inch above top edge of pocket.		X
	d. Tacking caught through one or both pockets.	X	
Inside pocket	a. Positioned more than 1 inch from pattern marks.		X
	b. Opening badly gapped.		X
	c. Corners of opening not securely tacked.	X	
	d. Opening: -less than 4-3/4 inches or more than 5-1/4 inches (sizes 36 to 38).		X
	-less than 5-1/4 inches or more than 5-3/4 inches (sizes 40 to 46).		X
	e. Depth less than 6 inches.		X
	f. Tacking along front edge to facing through interlining: -omitted or insecure.	X	
	-incomplete for a distance of less than 5 inches.		X
	g. Tacking on front edge of inside pocket to interlining omitted or insecure (machine tacking).	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	h. Tacking at lower edge to facing-lining seam allowance through interlining:		
	-omitted.	X	
	-insecure.		X
	i. Tacking on back upper corners to interlining omitted or insecure.	X	
Back yoke lining	a. Excessive fullness to pleats.		X
	b. Twisted, not affecting smoothness on outside surface of back.		X
	c. Hem twisted or width less than 1/4 inch or more than 1/2 inch wide.		X
	d. Bottom raw edge of yoke not turned under in stitching forming hem.		X
	e. Pleat in center of yoke lining omitted.	X	
	f. Folded edge of center pleat facing the right side of coat.		X
	g. Felling at lower edge of yoke lining to side seam outlet omitted or insecurely felled on one or both sides.		X
Front body linings	a. Excessive puckering or pleated.		X
	b. Twisted, not affecting smoothness on outside of coat.		X
	c. One or both chest pleats on shoulders omitted.	X	
	d. Folded edge of one or both chest pleats facing front edge of coat.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major (*) A	Minor B
	e. Felling on one or more front or back lower corners of forepart lining omitted or insecurely felled to facings or forepart side seam allowance.		X
	f. Hem twisted or width less than 1/4 inch or more than 1/2 inch wide.		X
	g. Bottom raw edge of body lining not turned under in stitching forming hem.		X
	h. Front darts omitted.		X
	i. Lower pocket stays exposed beyond finished bottom edge of lining.	X	
Binding on seam outlet	a. Not securely caught on fabric, causing binding to pull away from fabric easily.	X	
	b. Binding tight, causing edge of seams to curl and not lie flat.		X
Bottom turnup	a. Bottom turnup twisted or irregular in width by 1/4 inch or more.		X
	b. Binding tight, causing puckering on outside bottom of coat.	X	
	c. Bottom turnup less than 7/8 inch or more than 1-1/8 inches wide.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

*4.2.3.6 Finished measurements. Any measurement deviating from the nominal dimensions and tolerance specified in Table II shall be classified as a size measurement defect. Sleeve lengths uneven by 1/2 inch or more shall be classified as a size measurement defect.

*4.2.3.7 Inspection levels and AQL's. Inspection levels and AQL's expressed in defects per 100 units (DHU) shall be as follows:

4.2.3.2 through 4.2.3.5

Inspection Level III of MIL-STD-105

AQL's	Major	1.5 DHU
	Major and Minor A (combined)	10.0 DHU
	Total Major, Minor A and Minor B (combined)	40.0 DHU

4.2.3.6

Inspection Level S-3 of MIL-STD-105

One class	4.0 DHU

*4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged, selected just prior to closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the inspection lot. The inspection lot shall be S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of coats per shipping container is more or less than required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Level A.

*5.1.1.1 Method 1. Each coat with belt attached shall be folded in accordance with good commercial practice. Fifteen (15) coats of one size only shall be packed with the collar of every other coat in a reverse position in a fiberboard shipping container with liner conforming to class weather resistant, grade V2s, size 3A, of MIL-B-17757. The fiberboard used for fabricating the liner shall be grade V3c. The contents of the container shall be completely wrapped on the sides, top and bottom with a piece of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. This wrap shall be secured by the application of the tape or twine. Each shipping container shall be assembled, closed, and reinforced as specified in the appendix to the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed with the same shipping container.

*5.1.1.2 Method 2. When specified (see 6.2), three level B shipping containers (45 coats of one size only) shall be overpacked in a fiberboard shipping container conforming to class weather resistant, size No. 4, of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.1.2 Level B. Each coat with belt attached shall be folded in accordance with good commercial practice. Fifteen (15) coats of one size only shall be packed with collar of every other coat in a reversed position in a fiberboard shipping container with liner conforming to class domestic, size No. 3A, of MIL-B-17757. The fiberboard used for fabricating the container and the liner shall be grade 275. The contents of the container shall be completely wrapped on the side, top and bottom with a piece of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. This wrap shall be secured by the application of tape or twine. Each shipping container shall be assembled, closed and reinforced as specified in the appendix of the box specification. Towards the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.1.3 Level C. Coats shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.2 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

5.2.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES

*6.1 Intended use. The coats described herein are intended for wear by male officer's of the U.S. Marine Corps.

*6.2 Ordering data. Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

*6.2.1 Procurement requirements.

(a) Title, number and date of this specification.
(b) Class and size required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Number of coats in first article (see 3.2).
(e) Basic material required if other than specified (see 3.3.1).
(f) Selection of applicable levels of packing (see 5.1).
(g) When level A, method 2, packing required (see 5.1.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD Form 1423 included in the contract.

*6.3 Samples and shade samples. For information regarding availability of samples of the coat and of the standard shades specified and other cloth of adopted standards, address inquiry to the procuring activity issuing the invitation for bids.

*6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8405-N503

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

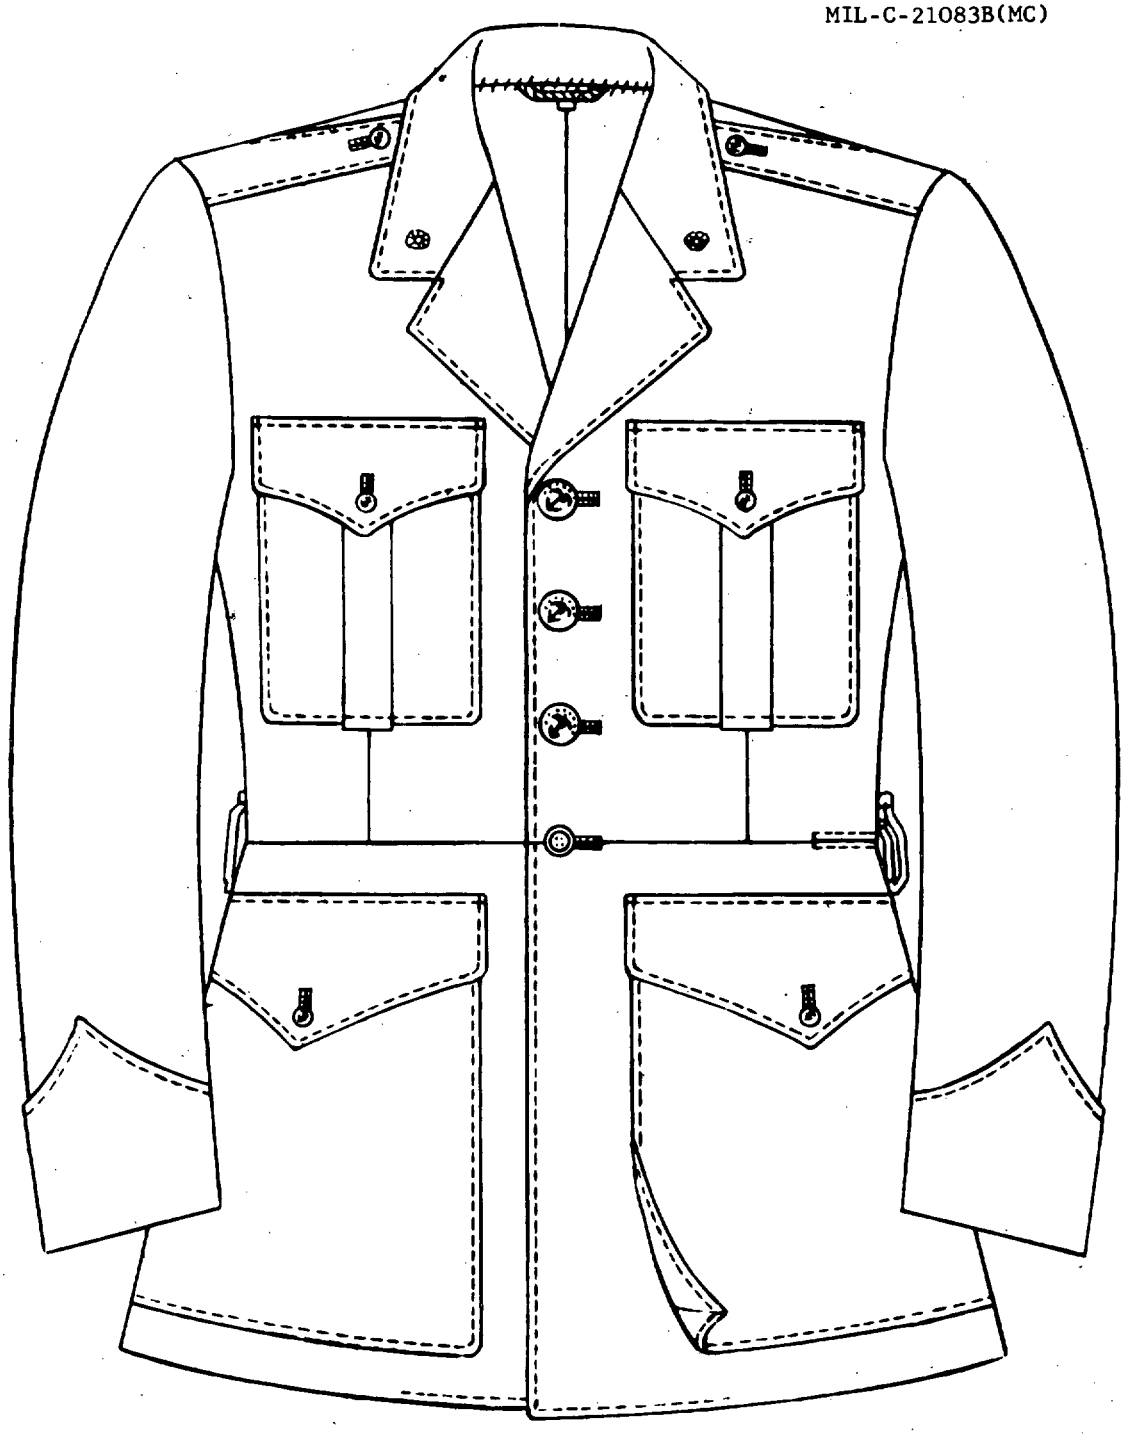


FIGURE 1. COAT, MAN'S: SERVICE, SUMMER AND WINTER, WOOL OFFICER'S; U.S.M.C.

M.C.S.A.
826:RS.F.
29 Jan 73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

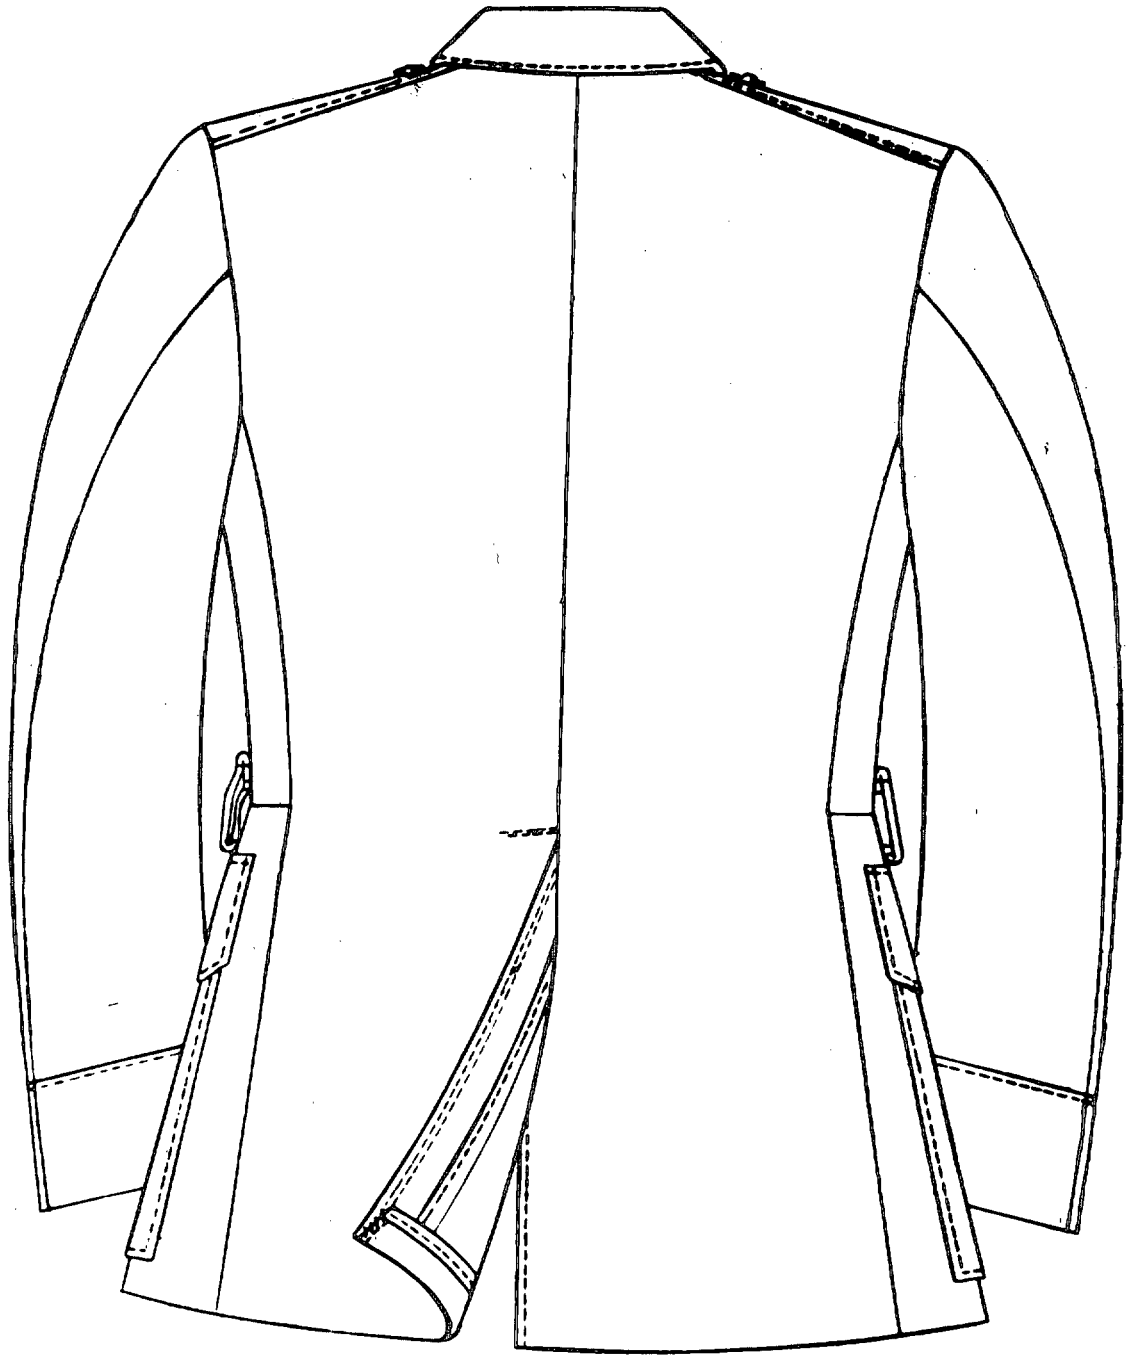


FIGURE 2. COAT, MAN'S: SERVICE, SUMMER AND WINTER, WOOL OFFICER'S, U.S.M.C.

M.C.S.A.
826:R.G.F.
29 Jan '73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

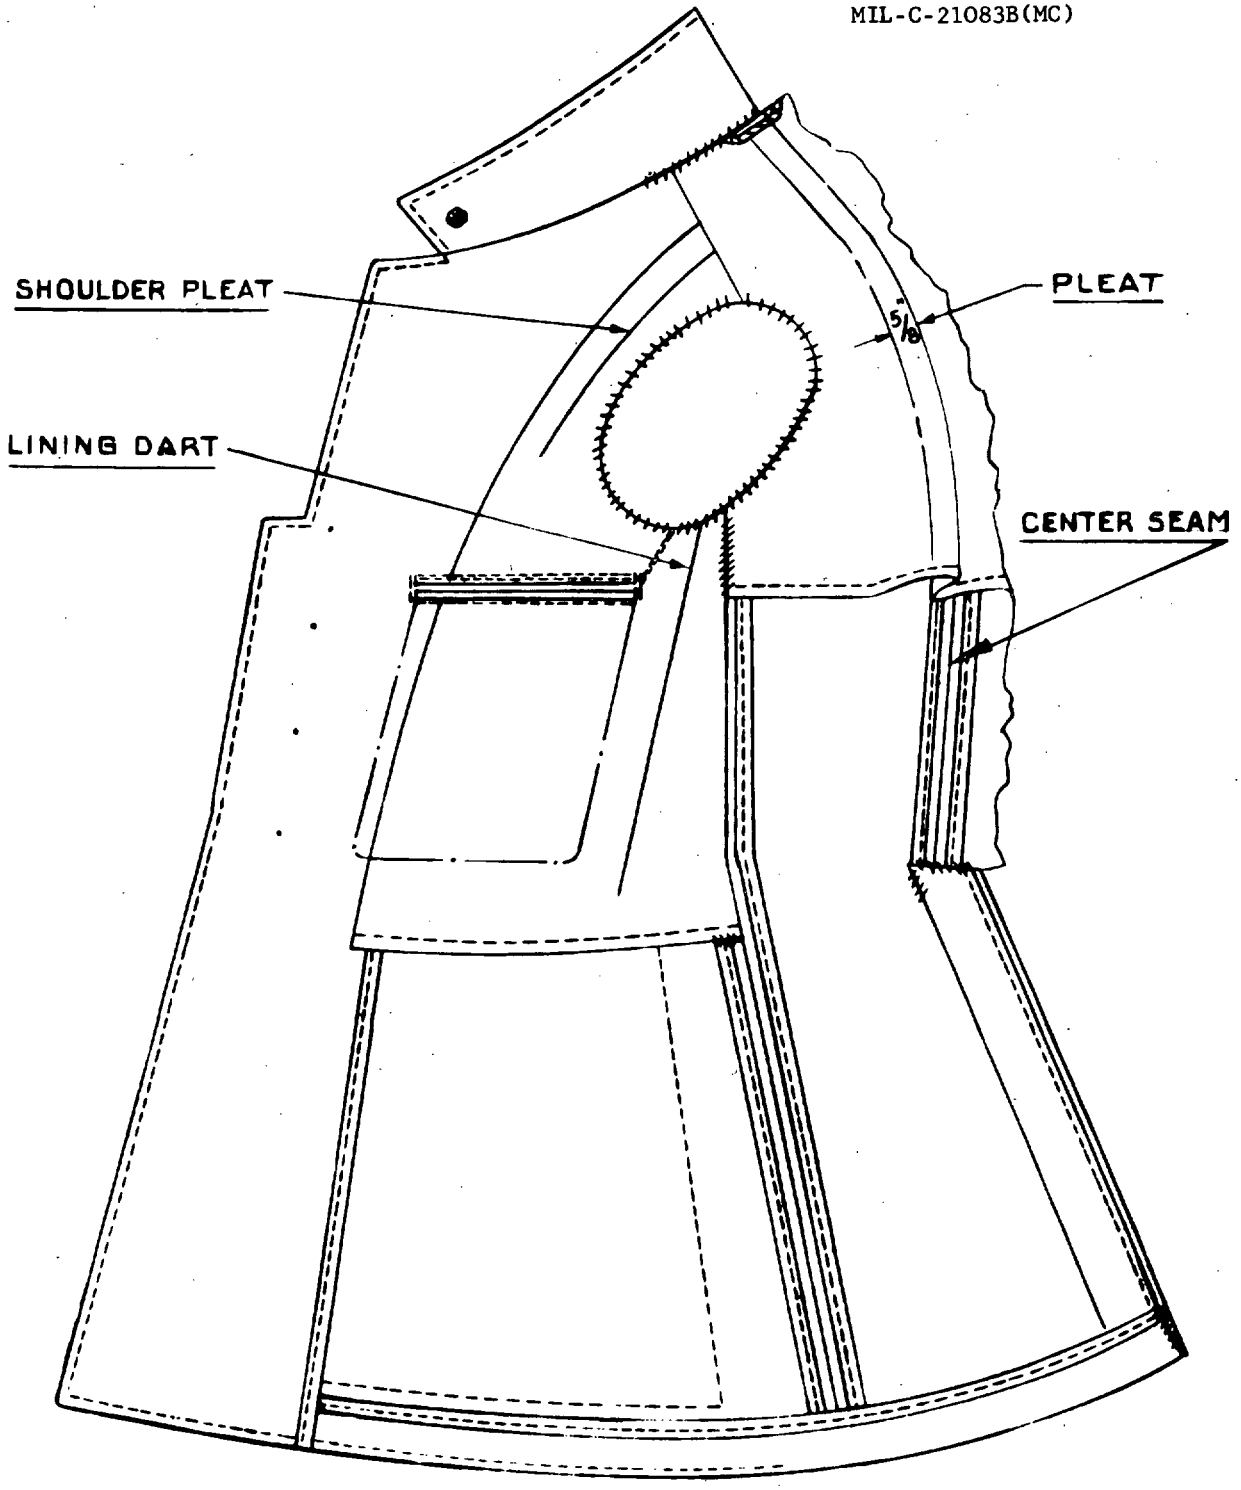


FIGURE 3. COAT, MAN'S: SERVICE; SUMMER AND WINTER; WOOL OFFICER'S, U.S.M.C.

M.C.S.A.
886: R.B.F.
29 Jan '73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.


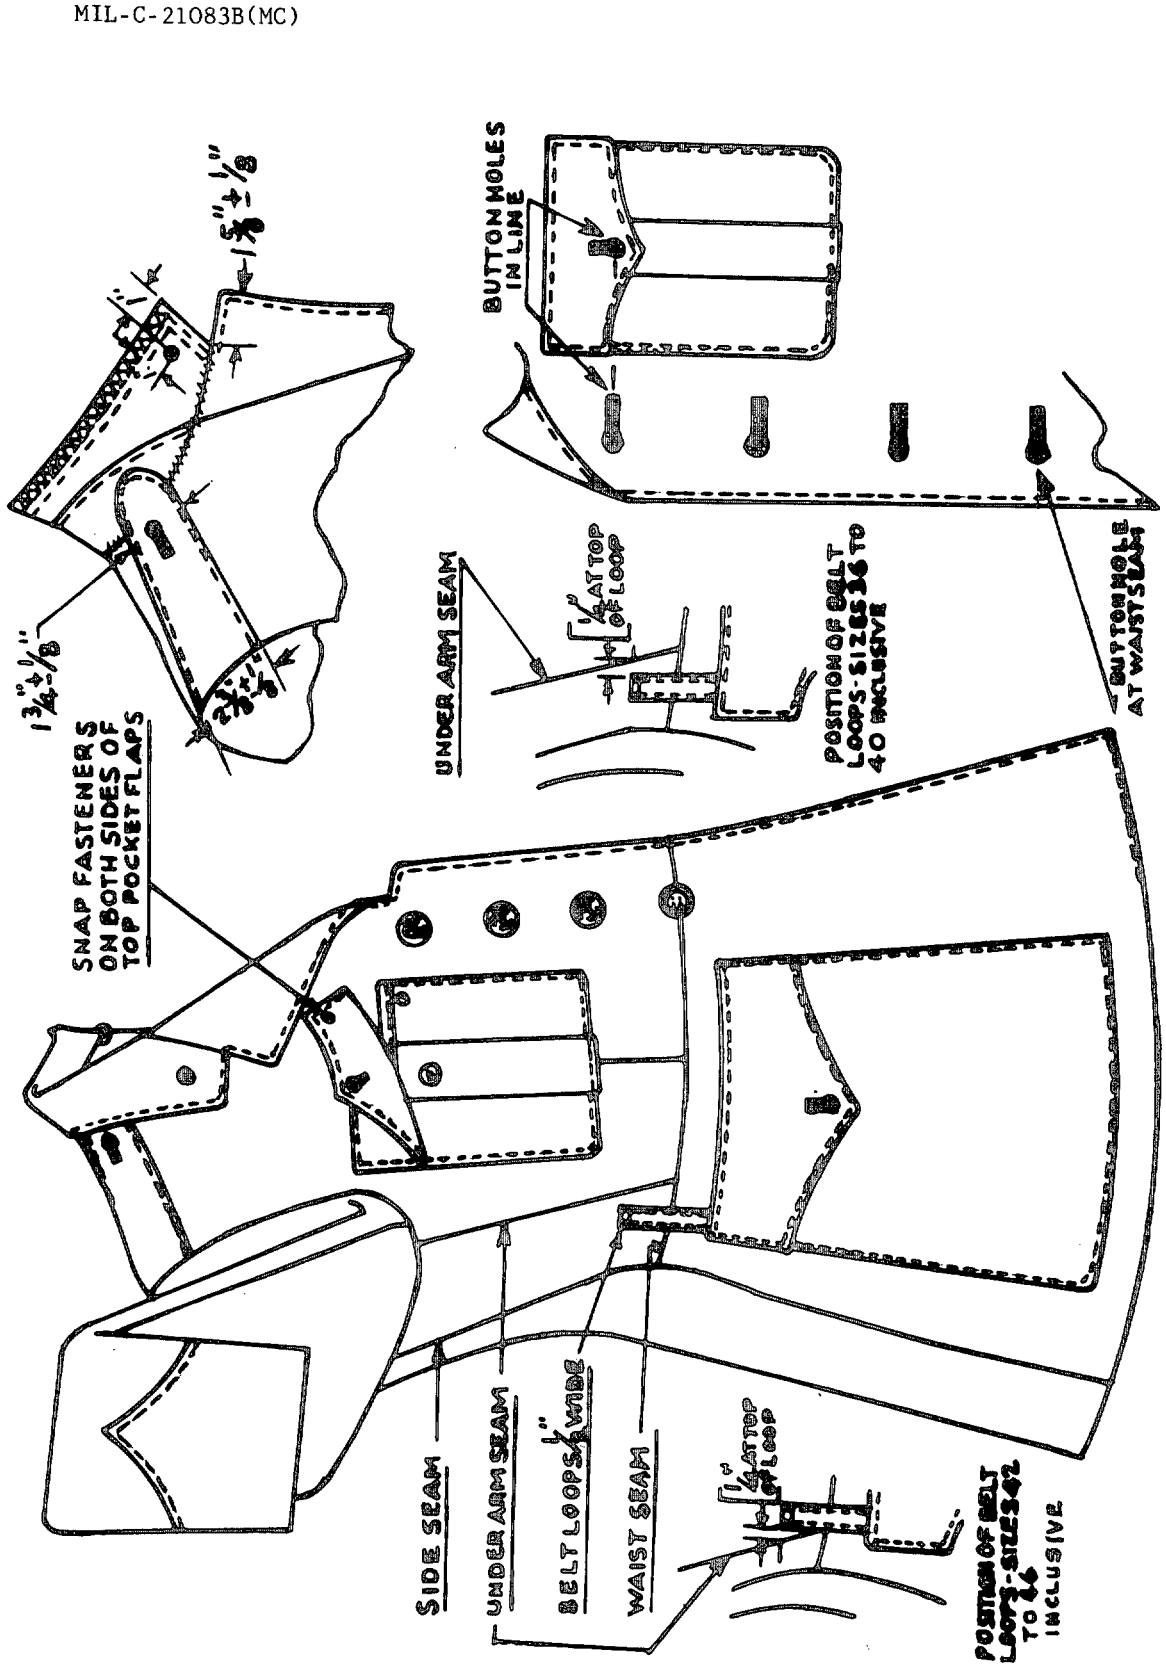


FIGURE 4. COAT, MAN'S: SERVICE; SUMMER AND WINTER; WOOL OFFICER'S, U.S.M.C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

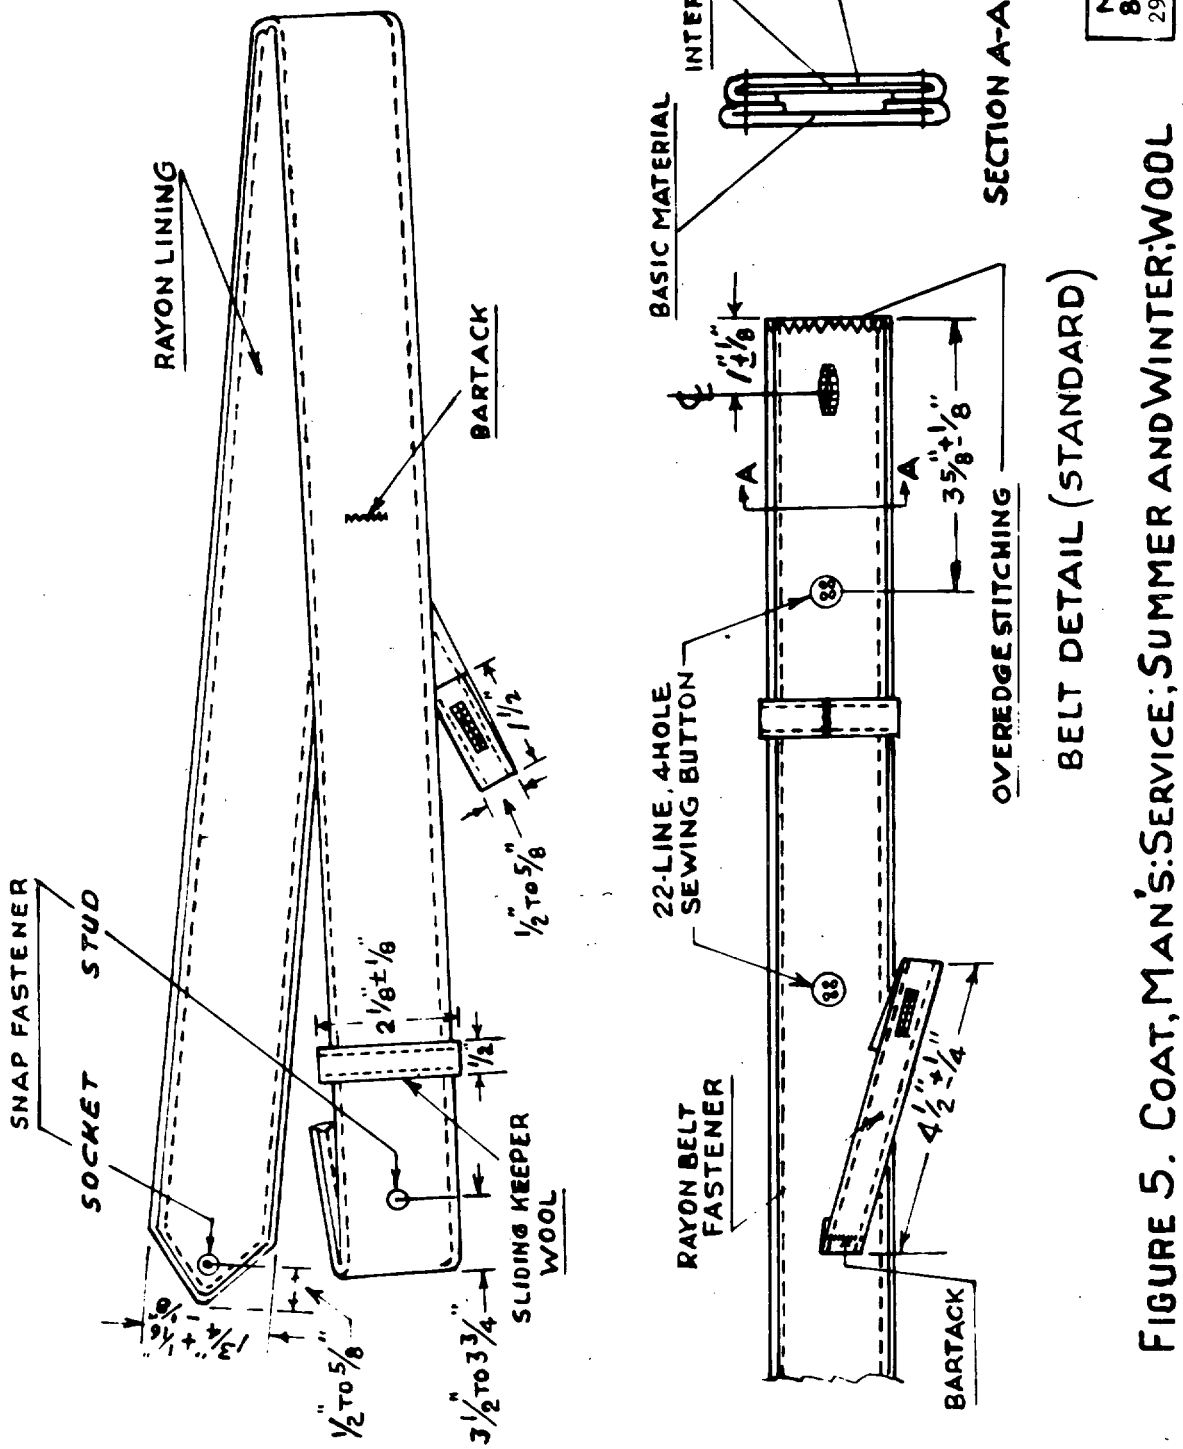



BELT DETAIL (STANDARD)

M.C.S.A. 826:R.F. 29 Jan '73

FIGURE 5. COAT, MAN'S: SERVICE; SUMMER AND WINTER; WOOL OFFICER'S, U.S.M.C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

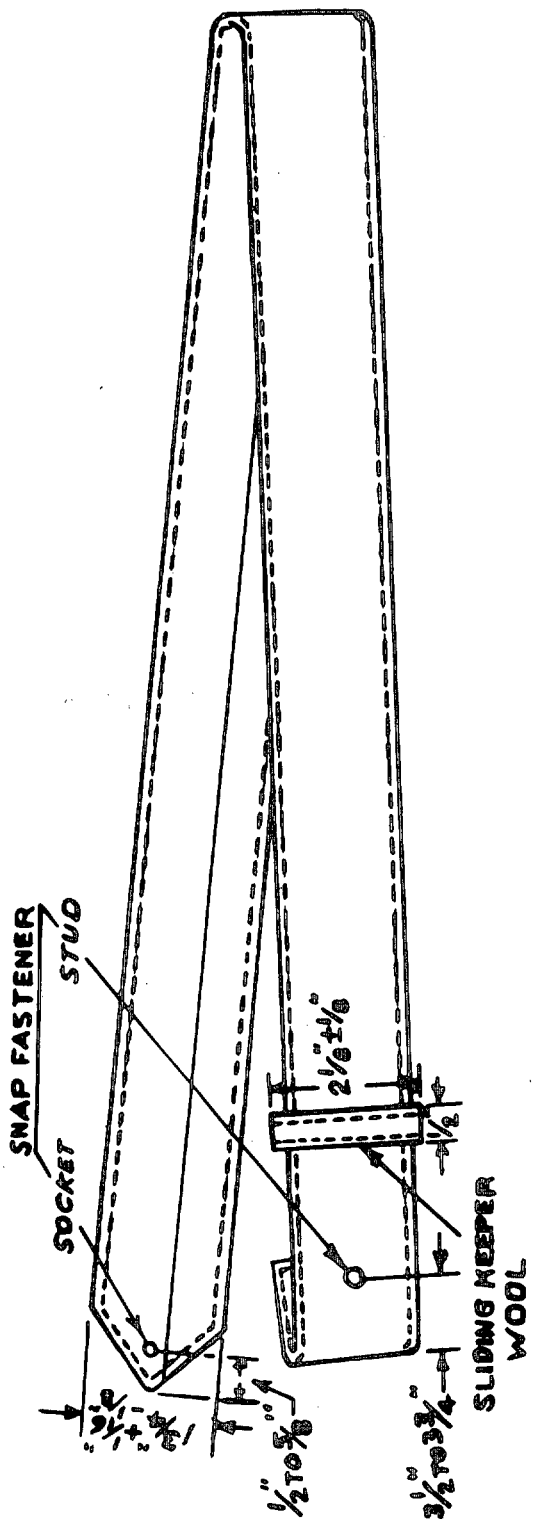

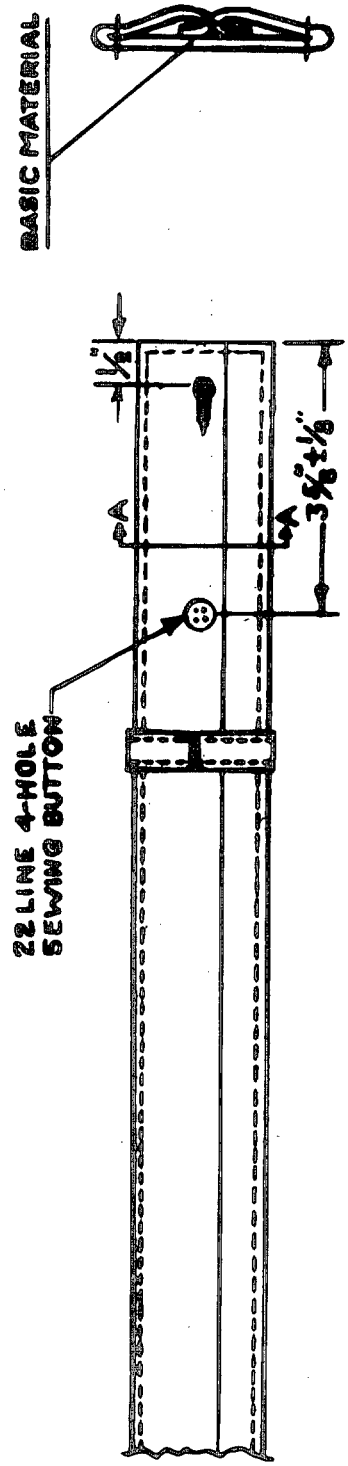

BELT DETAIL (OPTIONAL)

FIGURE 6. COAT, MAN'S: SERVICE; SUMMER AND WINTER: WOOL OFFICER'S, U.S.M.C.

MCRA 29 Jan '73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

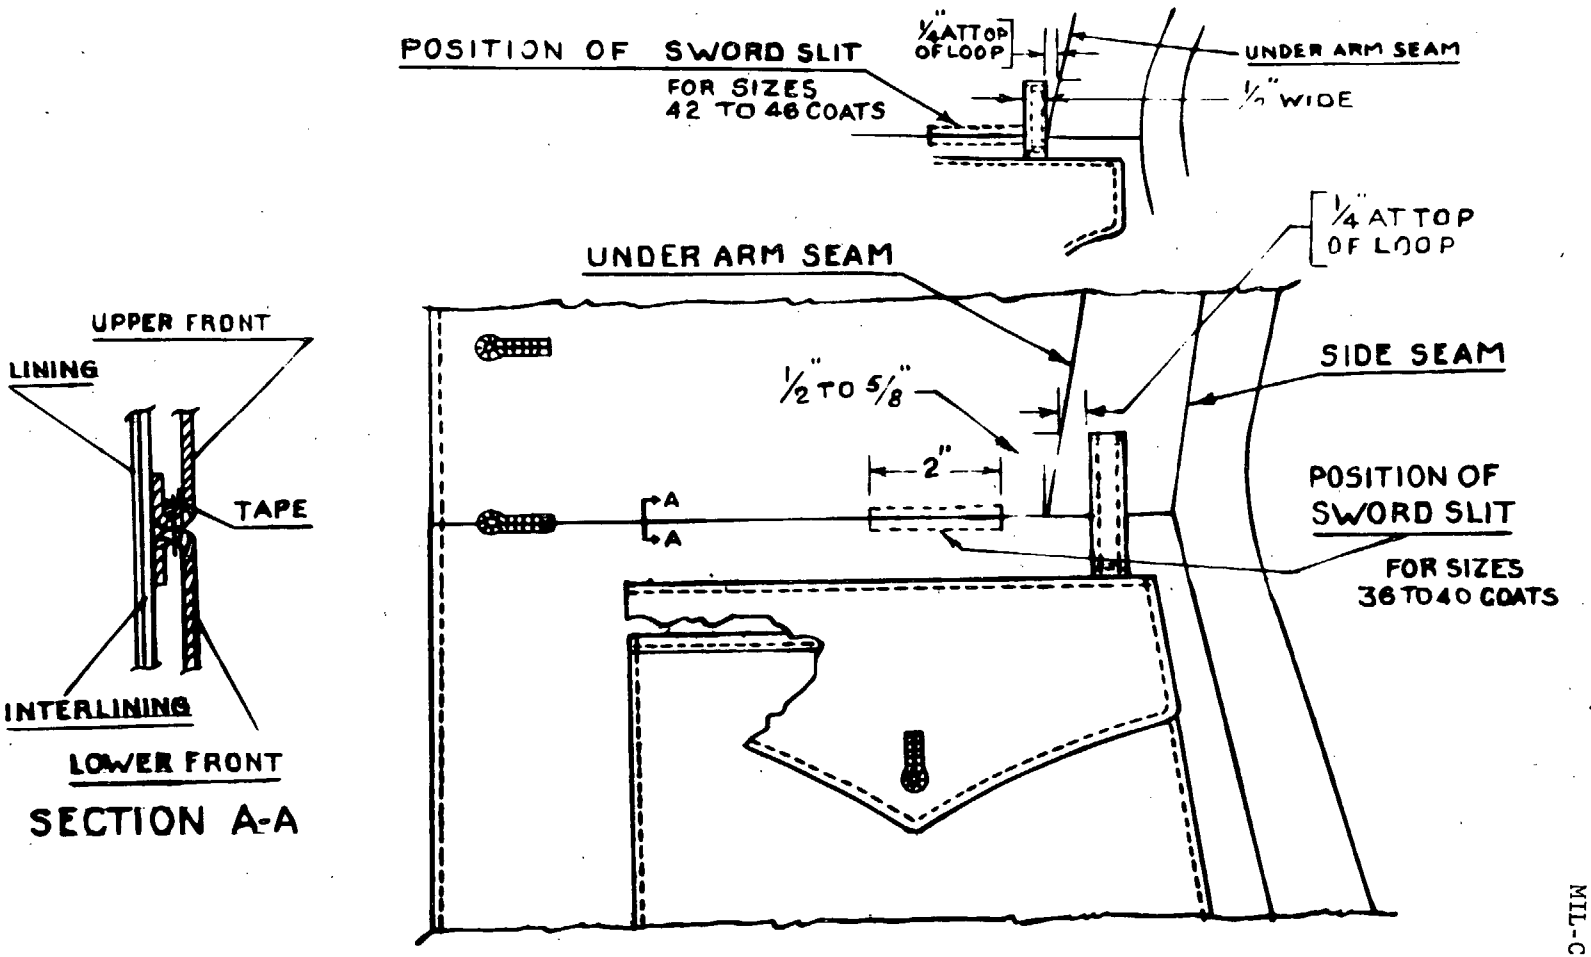


FIGURE 7. COAT, MAN'S SERVICE; SUMMER AND WINTER; WOOL OFFICER'S, U.S.M.C.

M.C.S.A. 826: R&P 29 Jan '73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

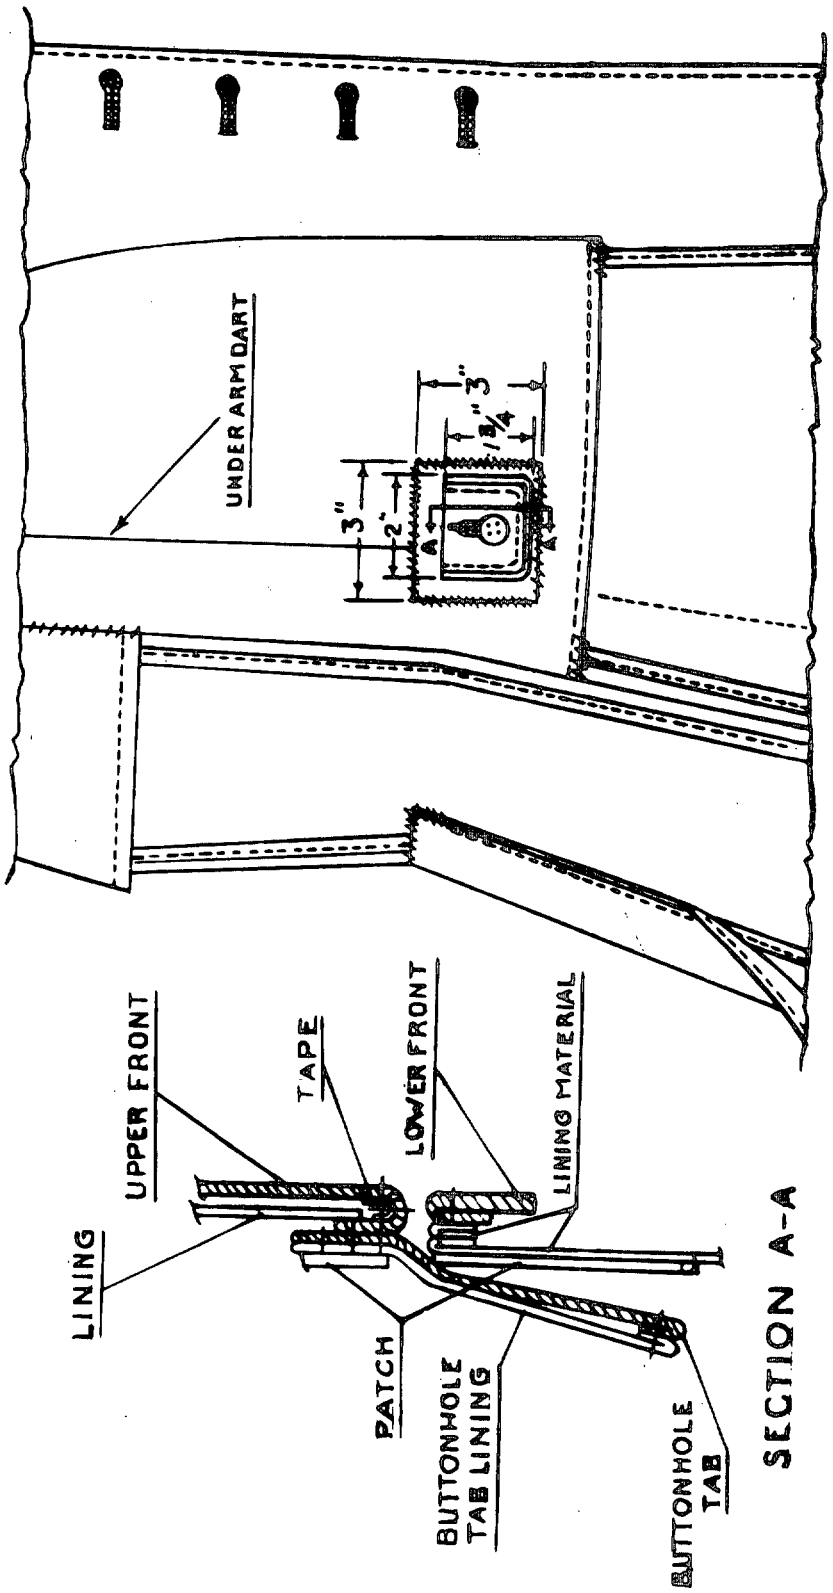


FIGURE 8. COAT, MAN'S: SERVICE; SUMMER AND WINTER; WOOL OFFICER'S, U.S.M.C.

M.C.S.A. 029: NAV 29 Jan 73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

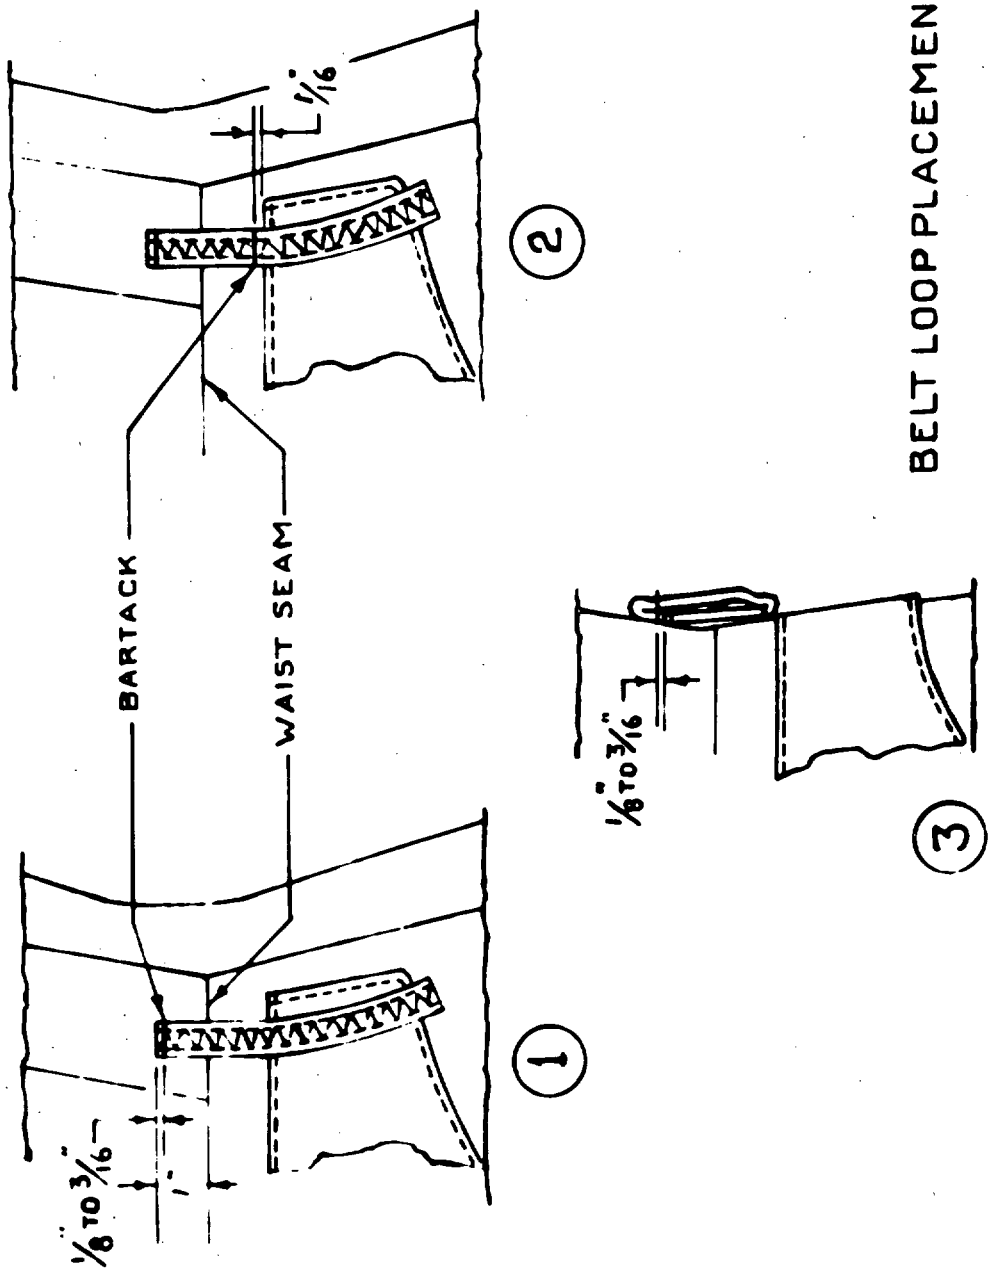


FIGURE 9. COAT, MAN'S: SERVICE: SUMMER AND WINTER: WOOL OFFICER'S, U.S.M.C.

M.C.S.A. 826: R.&.F. 29 Jan '73

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DoD-317

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:42Z
Check the source to verify that this is the current version before use.