MILITARY SPECIFICATION

for

HARNESS, SAFETY, SWIMMER'S

1. SCOPE

1.1 Scope. This specification establishes the requirements for an adjustable nylon-web harness which allows freedom of movement by a rescue swimmer where the attachment of a safety line is desirable.

1.2 Precedence. Any ambiguity or conflict between the text of this specification and the references cited herein shall be resolved by utilizing the following documents in the precedence shown:

a. This specification.
b. Applicable documents.

2. APPLICABLE DOCUMENTS

2.1 Applicability. The following documents of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein. Where the exact issue of a document is specified, that issue shall be used.

SPECIFICATIONS

Federal

V-T-295	Thread, Nylon

Military

MIL-F-495	Finish, Chemical, Black, for Copper Alloys
MIL-W-17337	Webbing, Woven, Nylon

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commandant (G-NRS), U.S. Coast Guard, Washington, DC 20593-0001, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:37Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-751	Stitches, Seams, and Stitchings
FED-STD-595	Colors

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Preproduction Sample. Unless otherwise specified at the time of the award, the supplier shall submit to the contracting officer a finished harness of the type he proposes to furnish, conforming to the requirements of this specification. (See 6.2)

3.2 Material. Materials employed in the fabrication of the harness shall be in conformance with the specification indicated and as otherwise specified herein.

3.2.1 Webbing. The webbing shall be 1-1/2 inch nylon webbing conforming to the requirements of MIL-W-17337 except for color. (See 3.2.1.1)

3.2.1.1 Color. The webbing shall be vat dyed to International Orange color conforming in shade to color No. 12197 of FED-STD-595.

3.2.1.2 Webbing Ends. All exposed webbing ends shall be seared to prevent fraying.

3.2.2 Metal Hardware. The clasp, adapter, connecting link, and triangular link shall be brass and shall have a lusterless black finish conforming to MIL-F-495. They shall have a minimum breaking strength as specified in 4.3.

3.2.3 Thread. The thread shall be Type II, Class A, Size E nylon thread of equal color to the webbing. It shall conform in physical characteristics and color fastness to V-T-295.

3.2.4 Stitching. Stitching shall be performed in accordance with Figure 1. It shall conform to FED-STD-751, Type 301 (Box Stitch) containing not less than 6 stitches per inch, and Type 304 (Zigzag) containing not less than 25 stitches per inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:37Z
Check the source to verify that this is the current version before use.

3.2.5 Dimensions. Dimensions of all component parts of the harness shall be in accordance with Figure 1. Webbing dimensions are cut lengths required before stitching.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Lot Size. All harnesses offered at one time for the purpose of acceptance, inspection, and tests shall be considered a lot.

4.2 Sampling.

4.2.1 Sampling for Lot Acceptance. A random sample of finished harnesses shall be selected from each lot offered for inspection of the materials, construction and workmanship with lot acceptance based on the sampling procedures of MIL-STD-105, Inspection Level I of Table III, AQL 1.0 of Table IV-A.

4.2.2 Sampling for Hardware. Prior to attachment to webbing straps, random samples of clasps, adapters, connecting links, and triangular links shall be selected by the Government inspector from each lot offered for inspection in accordance with procedures of MIL-STD-105, Inspection Level I of Table III, AQL 1.0 of Table IV-A. Samples shall be subjected to the tests specified in 4.3.

4.3 Test Procedures.

4.3.1 Clasp Breaking Strength Test. A section of webbing shall be attached to each side of the engaged clasp. The specimen shall be of sufficient length so the distance between the jaws of the test apparatus shall be approximately 10 inches after the specimen has been clamped for testing. The rate of separation shall be approximately 12 inches per minute. The load shall be increased to 360 $\pm$ 10 pounds and held at that value for 1 minute. The clasp shall not exhibit any signs of deformation, cracking, or breakage.

4.3.2 Adapter and Connector Link Breaking Strength Test. A section of webbing shall be attached to each side of the adapter or connecting link. The specimen shall be of sufficient length so the distance between the jaws of the test apparatus shall be approximately 10 inches after the specimen has been clamped for testing. The rate of separation shall be approximately 12 inches per minute. The load shall be increased to 360 $\pm$ 10 pounds and held at that value for 1 minute. Neither the adapter nor connecting link shall exhibit any signs of deformation, cracking, or breakage.

4.3.3 Triangular Link Breaking Strength Test. A section of webbing shall be attached to the base section of the triangular link. A cable shall be attached to the apex of the triangular link. The specimen shall be of sufficient length so the distance between the jaws of the test apparatus shall be

Source: https://assist.dla.mil -- Downloaded: 20260-19T08:37Z
Check the source to verify that this is the current version before use.

approximately 10 inches after the specimen has been clamped for testing. The rate of separation shall be approximately 12 inches per minute. The load shall be increased to 360 ± 10 pounds and held at that value for 1 minute. The triangular link shall not exhibit any signs of deformation, cracking, or breakage.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Harnesses shall be packaged in accordance with the manufacturer's commercial practice.

5.2 Packing. Harnesses shall be packed in a manner acceptable to common carriers for safe transportation to the point of destination specified in shipping instructions at the lowest transportation rate.

5.3 Marking. All containers shall be marked in accordance with MIL-STD-129. The nomenclature shall be "Harness, Safety, Swimmer's".

6. NOTES

6.1 Intended Use. Harnesses covered by this specification are intended for use by swimmers engaged in water rescue operations where freedom of arm movement and attachment of a safety line is desirable.

6.2 Ordering Data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Quantity to be furnished.

(c) Preproduction sample (See 3.1).

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


Custodian:
U. S. Coast Guard

Preparing Activity:
U. S. Coast Guard

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:37Z
Check the source to verify that this is the current version before use.

FIGURE 1. SAFETY HARNESS DETAILS


(DIMENSIONS ARE IN INCHES)

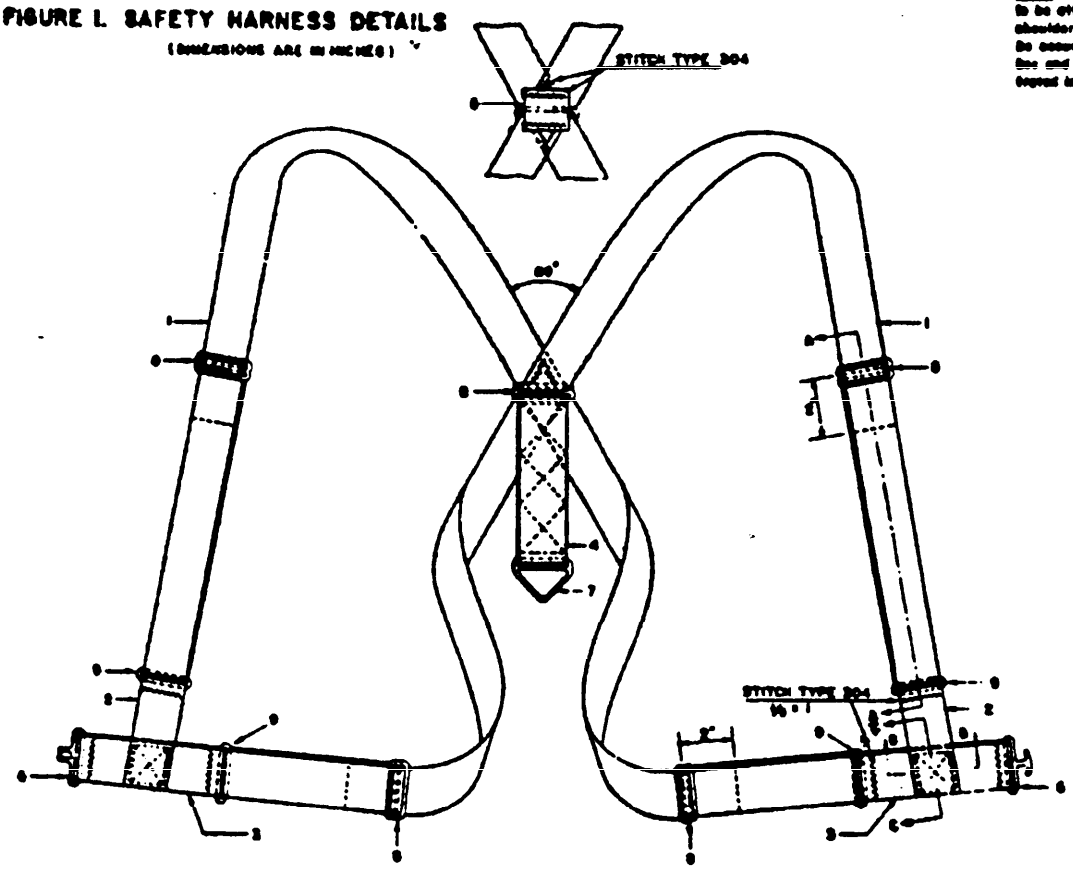


NOTE: Each of the four adapters to be attached to the ends of the shoulder straps (part no. 1) shall be secured with a 1 1/2 inch square box and cross stitching as shown in Section A-A.



SECTION A-A

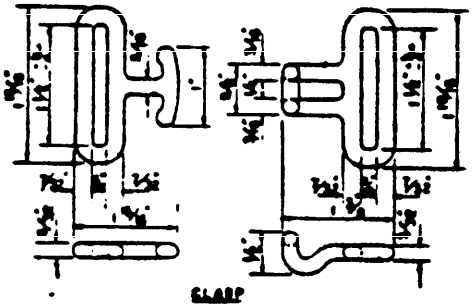

CLASP




LINK, TRIANGLE




SECTION B-B

SECTION C-C



ADAPTER



LINK, CONNECTING

PART NO	DESCRIPTION	NO REQ'D	SIZE (IN.)
1	WEBBING	2	1 1/2 x 48
2	WEBBING	2	1 1/2 x 8
3	WEBBING	2	1 1/2 x 9
4	WEBBING	1	1 1/2 x 20
5	WEBBING	1	1 1/2 x 1
6	CLASP	1	
7	LINK TRIANGLE	1	
8	ADAPTER	2	
9	LINK CONNECTING	4	

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:37Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:37Z
Check the source to verify that this is the current version before use.

OLD

U.S. Department
of Transportation

**United States
Coast Guard**

2100 Second St., S.W.
Washington, D.C. 20593

Postage and Fees Paid
United States
Coast Guard
DOT 514

U.S. MAIL

COMMANDANT (G-NRS)
U. S. COAST GUARD
2100 SECOND STREET, SW
WASHINGTON, DC 20593-0001

Official Business
Penalty for Private Use $300

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-H-21065A (CG),.MILITARY, SPECIFICATION FOR HARNESS, SAFETY, SWIMMER'S

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO
	DATE

DD FORM 1 OCT 76 1426 Replaces edition of 1 Jan 72 which may be used. S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:37Z
Check the source to verify that this is the current version before use.