
MILITARY SPECIFICATION SHEET

TRANSFORMERS, PULSE, LOW POWER, TYPE TP7SX1100MZ

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the transformers described herein shall consist of this document and the latest issue of MIL-T-21038.

(A) This specification is inactive for new design after the date of this specification.

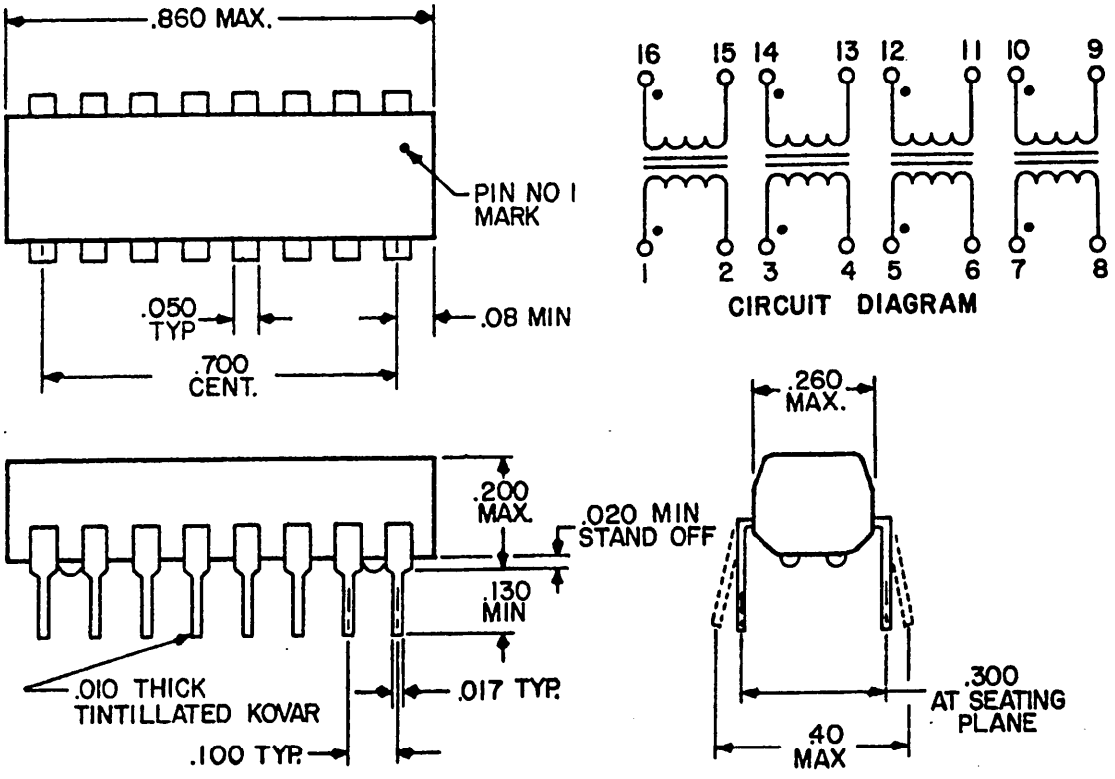

INCHES	MM	INCHES	MM
.010	.25	.200	5.08
.017	.43	.260	6.60
.020	.51	.300	7.62
.050	1.27	.40	10.16
.08	2.03	.700	17.78
.100	2.54	.860	21.84
.130	3.30		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

FIGURE 1. Dimensions and configuration.

(A) denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:33Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Dash no.	Primary inductance (±20%)	Primary ET constant (min)	Interwinding capacitance (max)	Leakage inductance (max)	Primary DCR (max)	Secondary DCR (max)
	µH	Vµs	pF	µH	ohms	ohms
001	8	1.0	7	.25	.16	.16
002	30	2.1	9	.25	.19	.19
003	57	2.8	11	.25	.34	.34
004	130	2.0	11	.25	.34	.34
005	230	2.7	13	.25	.55	.55
006	430	3.8	18	.25	.75	.75

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Turns ratio: 1:1.

Duty cycle: Continuous.

Average power rating: 250 mW.

Case: Encapsulated.

Terminals: Pin.

Terminal material: Type K per MIL-STD-1276.

Weight: 1 gram, maximum.

Terminal strength: Method 2004, MIL-STD-883, test condition B2.

Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202, 100 volts rms for 60 seconds between windings and ground.
Barometric pressure (reduced): Not applicable.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 1,000 megohms.

Electrical characteristics: See table I.
Voltage-time product (ET constant): The voltage-time product shall be determined by multiplying the amplitude of the applied pulse by the time required for the magnetizing current to deviate 20 percent from the value of the linearly extrapolated ramp portion of the magnetizing-current waveform in the region of core saturation.

Life (expectancy "X"): Applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:33Z
Check the source to verify that this is the current version before use.


Ambient temperature: 90°C.

Temperature rise: 40°C (250 mW).

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Shock (specified pulse): Method 213, test condition H, MIL-STD-202.

Part number: M21038/18 -(dash number from table I).

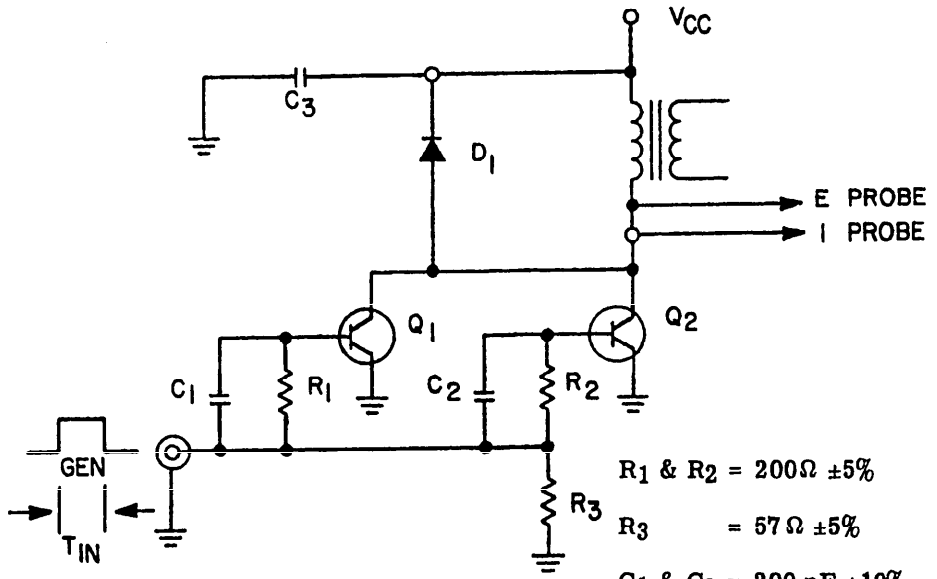

R_1 & R_2 = 200Ω ±5%

R_3 = 57Ω ±5%

C_1 & C_2 = 200 pF ±10%

C_3 = 15 to 25 μF @ 25 Vdc

Q_1 & Q_2 = 2N3725 NPN Transistors

D_1 = 1N4531 Diode

FIGURE 2. Test circuit.

(A) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Groups A and B tests of MIL-T-21038 shall be applicable.

Part number: M21038/18- (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:33Z
Check the source to verify that this is the current version before use.

Preparing activity:
Air Force - 85

(Project 5950-0587-10)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:33Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-T-21038/18A

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 MAY BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:33Z
Check the source to verify that this is the current version before use.

FOLD

DEFENSE LOGISTICS AGENCY

OFFICIAL BUSINESS
ALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 4966 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Directorate of Electronic Support
ATTN: AFALD/PTS
Gentile AFS OH 45444

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:33Z
Check the source to verify that this is the current version before use.