
MILITARY SPECIFICATION SHEET

TRANSFORMER, PULSE, LOW POWER, TYPE TP5SX2100HU


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-21038.



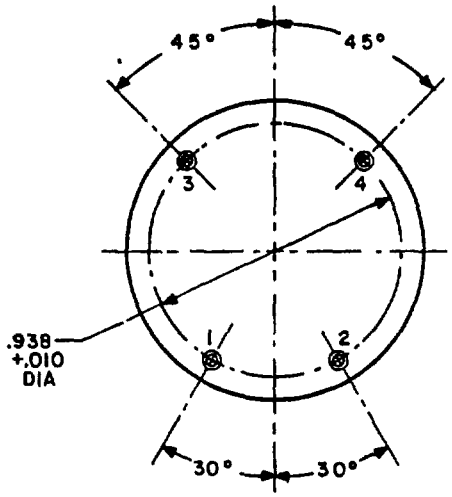

CIRCUIT DIAGRAM

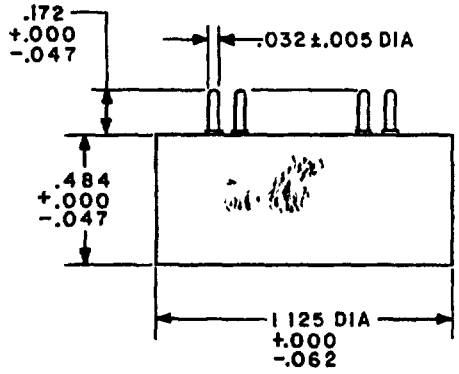

INCHES	MM
.005	.13
.010	.25
.032	.81
.047	1.19
.062	1.57
.172	4.37
.484	12.29
.938	23.83
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Marking shall be on the top of case.

FIGURE 1. Transformer type TP5SX2100HU

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1.
Case. Encapsulated.
Terminals Pin type, per QQ-B-626, composition 22, brass and half-hard silver plated per MIL-F-14072 and QQ-S-365.
Weight: 0.6 ounce, maximum.

Terminal strength: MIL-STD-202, method 211, test condition A, 2.5 pounds.

Dielectric withstanding voltage
At atmospheric pressure. MIL-STD-202, method 301, 2,400 volts rms for 60 seconds between windings.
Barometric pressure (reduced). Not applicable.

Insulation resistance. MIL-STD-202, method 302, test condition B.
Not less than 10,000 megohms.

Electrical characteristics: See table I.
Voltage-time product (ET constant) The voltage-time product shall be determined by multiplying the amplitude of the applied pulse by the time required for the magnetizing current to deviate 20 percent from the value of the linearly extrapolated ramp portion of the magnetizing-current waveform in the region of core saturation.

Life (expectancy "X"). Applicable.

Temperature rise Not applicable.

Vibration MIL-STD-202, method 201.

Shock (specified pulse) MIL-STD-202, method 213, test condition H.

Moisture resistance. Polarizing voltage applicable.

Part number M21038/26-001.

TABLE I Electrical characteristics including waveform parameters

Impedance (ohms)		Current (mA)		Voltage (Vpk)		DCR (ohms)		ET constant (Vμs)	Turns ratio	Pulse duration (μs)	Pulse rise time (ns)	Over-shoot (V max)	Droop (V max)	Back-swing (V max)	Pulse repetition frequency (kHz)
Source	Load	Pri	Sec	1-2	3-4	Pri	Sec	min		max					
40±15%	10	40	80	16	8	048 to 065	029 to 041	162 4	2 1	3 0	.05	4	.16	24	200

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:34Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - AM, MI
Navy - SH, AS, OS
Air Force - 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5950-0553-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22 R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE MIL-T-21038/26

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:34Z
Check the source to verify that this is the current version before use.