INCH-POUND
MIL-PRF-55339/13B
10 January 2005
SUPERSEDING
MIL-PRF-55339/13A
11 January 1977

PERFORMANCE SPECIFICATION SHEET

ADAPTERS, CONNECTOR, COAXIAL, RADIO FREQUENCY, IN-LINE, JAMNUT MOUNTED, (WITHIN SERIES BNC JACK TO SERIES BNC JACK, (HERMETIC AND NON-HERMETIC)), CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55339.

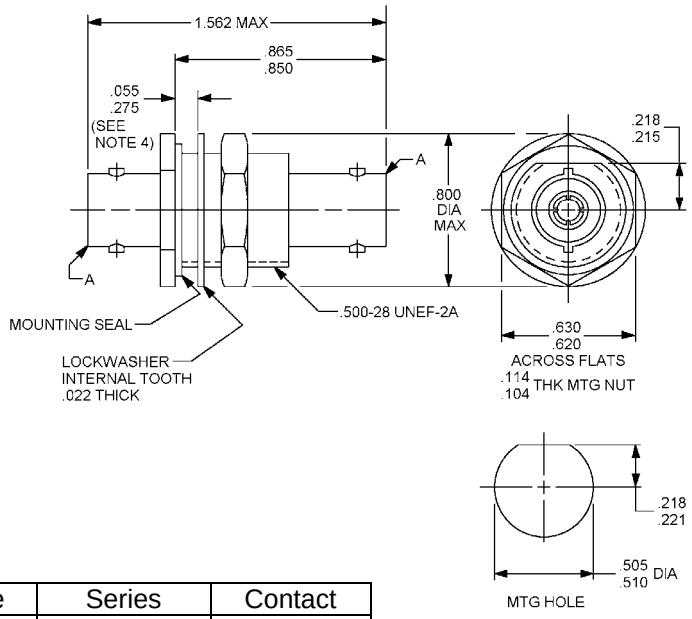

Reference	Series	Contact
A	BNC	Socket

mm	Inches	mm	Inches	mm	Inches	mm
0.56	.215	5.46	.500	12.70	.630	16.00
1.40	.218	5.54	.505	12.83	.800	20.32
2.64	.221	5.61	.510	12.95	.850	21.59
2.90	.275	6.98	.620	15.75	.865	21.97
					1.562	39.67

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. All undimensioned pictorial representations are for reference purposes only.
4. Panel thickness .055 minimum, .275 maximum.
5. Interface dimensions shall be in accordance with MIL-STD-348.

FIGURE 1. General configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

DESIGN AND CONSTRUCTION:

General configuration: See figure 1.

Impedance: 50 ohms, nominal.

Working voltage:

Sea level: 1,000 Vrms.

70,000 feet (4.437 kPa): 125 Vrms

Frequency range: 0 to 4 GHz.

Temperature range: -65º to +165ºC.

PERFORMANCE (installation torque is not applicable):

Dimensions: See figure 1 and MIL-STD-348.

Center contact retention:

Axial force: 6 lb (26.69 N) minimum.

Torque: Not applicable.

Force to engage and disengage:

Longitudinal force: 3 lb (13.34 N), maximum.

Torque: 2.5 in. lb (0.28 Nm), maximum.

Coupling proof torque: Not applicable.

Mating characteristics:

Center contact (socket):

Oversize test pin dia: .057 inch (1.45 mm), minimum.

Insertion depth: .125 inch (3.17 mm), minimum.

Number of insertions: 1.

Maximum test pin (insertion force test):

Steel test pin dia: .054 inch (1.37 mm), minimum.

Pin finish: 16 microinches (0.406 µm).

Insertion force: 2 lb (8.90 N), maximum.

Number of insertions: 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

Minimum test pin (withdrawal force):

Steel test pin diameter: .052 inch (1.32 mm), maximum.

Pin finish: 16 microinches (0.406 µm).

Withdrawal force: 2 oz (0.56 N), minimum.

Number of withdrawals: 1.

Outer contact: Not applicable.

Permeability: <2.0

Seal:

	- 00492 or -70001	- 00001 1/ or -70002
Hermetic:	1 x 10^{-7} atm cm^3/sec (center contact to body)	Not applicable
Pressurized:	Not applicable	30 psi (206.8 kPa), maximum
Weatherproof:	30 psi (206.8 kPa), maximum (mounting seal)	30 psi (206.8 kPa), maximum (mounting seal)

Insulation resistance: 5,000 megohms, minimum.

VSWR: 1.40:1, maximum for hermetic and 1 25:1 maximum for non-hermetic at .5 to 4 GHz.

RF leakage (total): -55 dB, minimum, 2 to 3 GHz.

RF insertion loss: 0.5 dB maximum for hermetic and 0.2 dB maximum for non-hermetic, 3 GHz (.144 √F (GHz) dB maximum tested at 3 GHz).

Durability 500 cycles minimum at 12 cycles/minimum maximum The connector shall meet the mating characteristics and force to engage and disengage requirements.

Dielectric withstanding:

Test voltage: 1,500 Vrms, minimum (sea level).

Contact resistance (milliohms, maximum).

Contact	Hermetic (-00492, -70001)		Non-hermetic (-00001, -70002)	
	Initial	After	Initial	After
Center	4.4	4.9	1.5	2.0
Outer	0.2	N/A	0.2	N/A
Outer (-70001)	0.4	N/A	(-70002) 0.4	N/A

1/ Internal parts shall be constructed of nonferro-magnetic material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

Vibration, high frequency:

Interruptions: 1 μs, maximum.

Shock: Test condition I.

Thermal shock: Test condition C.

Moisture resistance: 200 megohms, minimum.

Corona level:

Voltage: 375 V, minimum.

Altitude: 70,000 feet (4.437 kPa), minimum.

RF high potential withstanding voltage:

RF voltage: 1,000 Vrms, minimum.

Frequency: 5 MHz, minimum.

Salt spray (corrosion): Applicable.

Coupling mechanism retention force: Not applicable.

Part or Identifying Number (PIN):

M55339/13-00492 Hermetic and M55339/13 -00001 Non-hermetic or:

PIN: M55339/13-70001 Hermetic and M55339/13-70002 Non-hermetic. **CAUTION: THIS PART HAS A NICKEL PLATED BODY AND IS NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.**

TABLE I. Cross reference of PINs.

PIN	Superseded PIN or type designation 1/
M55339/13-00492	MS35177 REB49098 UG-492D/U

1/ The superseded PIN or the type designation is for cross-reference only. Where a superseded PIN or type designation is not given; none was assigned or will be assigned.

Reference documents. In addition to MIL-PRF-55339, this document references the following:

MIL-STD-348

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4657-012)

Review activities:
Army - AR, AT, EA, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:05Z
Check the source to verify that this is the current version before use.