MIL-E-1/1574E
16 December 1976
SUPERSEDING
MIL-E-1/1574A
22 February 1971

MILITARY SPECIFICATION SHEET

ELECTRON TUBE, PHOTOTUBE

TYPE 6467

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Multiplier, high vacuum, 10 stage, S11 response

DIMENSIONS AND PIN CONNECTIONS: See figure 1

ABSOLUTE RATINGS:

Parameter:	epp	eb-edy10	Light source	Light	Ib	edyl-ek	TA	Pp(Av)	Cathode area	Alt
Unit:	v	v	---	lm	mAdc	v	°C	W	lighted sq in.	ft
Maximum:	1,800 (Note 1)	200 (Note 2)	---	---	5	400 (Note 3)	75	0.5	---	10,000
TEST CONDITIONS:	1,260	105	LS1	$1x10^{-6}$	---	210	---	---	0.78	---

GENERAL:

Qualification - Not required
Marking - See note 4

Ⓑ denotes changes

6467

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:00Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	CONDITIONS	SYMBOL	LIMITS		UNIT
					MINIMUM	MAXIMUM	
	Quality conformance inspection, part 1						
---	Cathode current	6,7,8	Light = 0.01 ℓ_m	Ik	0.50	---	µAdc
5301	Anode current	6,8,9		Ib	4	---	µAdc
5301	Dark current (interelectrode)	9,10		LIb	---	0.05	µAdc
5301	Dark current (anode)	9		LIb	---	0.05	µAdc
	Quality conformance inspection, part 2						
1101	Secureness of base, cap, or insert	11		---	---	---	---
1105	Permanence of marking	-		---	---	---	---
	Quality conformance inspection, part 3						
---	Life test	12	Group D; epp = 1,260 v; t = 500 hours	---	---	---	---
---	Life-test end point:						
5301	Anode current	-		Ib	7.5	---	µAdc
(E) 1331	Direct - interelectrode capacitance	5,13	Anode to dynode 10	C	---	3.0	pF
(E) 1331	Direct - interelectrode capacitance	13	Anode to all other elements	C	---	5.0	pF
(E) 5303	Spectral response identification	13	S11	---	---	---	---
(3) 1216	Base material insulating quality	13	Zone 5, or higher	---	---	---	---

NOTES:

1. Supply voltage (dc or peak ac). Overall anode to cathode.
2. Supply voltage (dc or peak ac). Anode to tenth dynode.
3. Supply voltage (dc or peak ac). First dynode to cathode.
4. Marking for the unit container shall include the following: "Do not remove from container except for use or test. Avoid prolonged exposure to light."
5. All other elements shall be grounded.
6. This test to be performed at the conclusion of the holding period.
7. 210 volts shall be applied between cathode and all other electrodes tied together.
8. The light during test shall uniformly cover the whole cathode area.
9. Tubes shall be tested under the following conditions: edyl-ek = 210 vdc; voltage on the multiplier structure = 105 vdc per stage; eb-edyl0 = 105 vdc.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:00Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

10. The dark current to any one of the following electrodes shall conform to the requirements of this specification sheet; cathode and dynode 1 through dynode 10.

11. Immersion in water shall be omitted.

12. Initially, adjust luminous flux at cathode to obtain an anode current of 10 µAdc. Color temperature shall be greater than 2,000°K.

13. This test shall be performed during the initial production and once each succeeding 12-calendar months in which there is production. A regular double sampling plan shall be used, with the first sample of three tubes with an acceptance number of zero, and a second sample of three tubes with a combined acceptance number of one. In the event of failure, the test will be made as a part of quality conformance inspection, part 2, code level D, with an AQL of 6.5. The regular "12-calendar month" double sampling plan shall be reinstated after three consecutive samples have been accepted.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Air Force - 17, 99
DSA - ES


User activities:
Army - WC
Navy - AS, OS, MC, CG
Air Force - 11


Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-3119)

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:00Z
Check the source to verify that this is the current version before use.

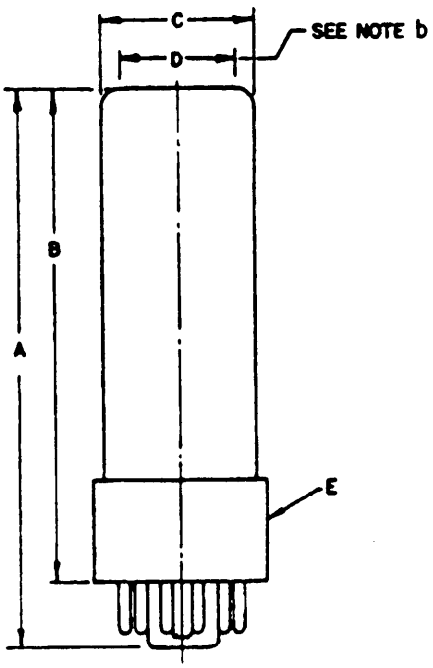



BASE DIAGRAM

Pin no.	Element
1	Dynode no. 1
2	Dynode no. 3
3	Dynode no. 5
4	Dynode no. 7
5	Dynode no. 9
6	Anode
7	Dynode no. 10
8	Dynode no. 8
9	Dynode no. 6
10	Dynode no. 4
11	Dynode no. 2
12	Cathode & shield

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	4.31(109.47)	4.69(119.13)
B	3.81 (96.77)	4.19(106.43)
C	1.19 (30.23)	1.31 (33.27)
D	1.00 (25.40)	
(B) Quality conformance inspection, part 3 (See note 13)		
E	Base: B12-43	

NOTES:
a. Direction of light is into the end of the bulb.
b. Minimum photocathode diameter.

FIGURE 1. Outline drawing of electron tube type 6467.

93070 1060

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:00Z
Check the source to verify that this is the current version before use.

FOLD

EPARTMENT OF THE NAVY
AVAL ELECTRONIC SYSTEMS COMMAND
'ASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:00Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:00Z
Check the source to verify that this is the current version before use.