INCH-POUND

MIL-PRF-1/1593C
19 July 1999
SUPERSEDING
MIL-E-1/1593B
27 June 1983

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, RECEIVING
TYPE 8233

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: Pentode, sharp cutoff.

Outline: See figure 1.

Base: E9-23.

Envelope: T9.

Cathode: Coated unipotential

Base connections:

Pin No.	1	2	3	4	5	6	7	8	9
Element	a	g3	g2	h	h	g3	k	g1	k

ABSOLUTE MAXIMUM RATINGS:

Parameter:	Ef	Ebb	Eb	Ecc2	Ec2	Ec3	Ecc1	Ec1	egk
Unit:	V	V dc	V dc	V dc	V dc	V dc	V dc	V dc	v
Maximum:	6.6	400	200	350	175	---	---	0, -55	0
Minimum:	6.0	---	---	---	---	---	---	---	-110
Test conditions:	6.3	136	---	136	---	0	+8	---	---

ABSOLUTE MAXIMUM RATINGS:

Parameter:	Ehk	Rk	Rg1	Ik	Pg2	Pp	TE	Alt
Unit:	v	Ohms	Meg	mA dc	W	W	°C	ft
Maximum:	200	---	0.125	75	1.5	10	180	60,000
Minimum:	---	---	---	---	---	---	---	---
Test conditions:	0	200	---	---	---	---	---	---

See footnotes at end of table I.

GENERAL:

Qualification: Not required.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Notes	Conditions	Acceptance level	Inspection level or code	Symbol	Limits		Unit
							Min	Max	
Conformance inspection, part 1									
Heater current	1301	---		0.65	II	If	540	660	mA dc
Heater-cathode leakage	1336	---		0.65	II	Ihk	---	15	µA dc
Total grid current	1266	---		0.65	II	Ic1	0	-1.0	µA dc
Electrode voltage (grid 1)	1261	1/		0.65	II	Ec1	2.3	3.7	V dc
Electrode current (screen)	1256	---		0.65	II	Ic2	---	7.0	mA dc
Transconductance (1)	1306	---		0.65	II	Sm	38,000	52,000	µmhos
Electrode current (anode)	1256	---	Ec1= -6 V dc; Eb = 125 V dc; Ec2 = 125 V dc	0.65	II	Ib	---	1.0	mA dc
Short and discontinuity detection	1201	---	egk = 110 v (max)	0.4	II	---	---	---	---
Conformance inspection, part 2									
Insulation of electrodes	1211	---	E (g1 to all) = -50 V dc E (a to all) = -200 V dc	2.5	I	---	---	---	---
Transconductance (2)	1306	---	Ef = 5.7 V	2.5	I	ΔSm Ef	---	10	%
Amplification factor	1316	2/		6.5	S3	Mu	26	34	---
Grid emission	1266	3/	Ef = 7.5 V; Ecc1 = -10 V dc; Rg1 = 0.1 Meg	2.5	I	Ic1	0	-2.0	µA dc
Direct-interelectrode capacitance	1331	---	No shield	6.5	Code E	Cin Cout Cgp	15 3.6 ---	21 4.4 0.15	pF pF pF
Barometric pressure, reduced	1002	---	Pressure = 55 ± 5 mmHg; voltage = 300 V ac	6.5	4/	---	---	---	---
High-frequency vibration	1031	---	Rp = 2,000 ohms; Rk = 56 ohms, unbypassed; Rg = 20,000 ohms; Cg2 = 25 µF; Ebb = Ecc2 = 225 V dc; Ec1 = 0 F = 50 Hz	2.5	Code H	Ep	---	50	mV ac

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method	Notes	Conditions	Acceptance level	Inspection level or code	Symbol	Limits		Unit
							Min	Max	
Conformance inspection, part 2 - Continued									
Shock	1041	---	450 G; no voltages applied	6.5	4/	---	---	---	---
Vibration-fatigue	1031	---		6.5	4/	---	---	---	---
Shock and vibration-fatigue-test end points:	---								
High-frequency vibration	1031	---	Rp = 2,000 ohms; Rk = 56 ohms, unbypassed; Rg2 = 20,000 ohms, Cg2 = 25 µF; Ebb = Ecc2 = 225 V dc; Ec1 = 0; F = 50 Hz	---	---	Ep	---	100	mV ac
Heater-cathode leakage	1336	---		---	---	Ihk	---	25	µA dc
Total grid current	1266	---		---	---	Ic1	0	-2.0	µA dc
Change in transconductance (1) of individual tubes	1306	---		---	---	ΔSmt	---	20	%
Envelope strain	2126	---		2.5	I	---	---	---	---
Permanence of marking	1105	---		---	---	---	---	---	---
Conformance inspection, part 3									
Heater-cycling life	1506	5/	Ef = 7.5 V; Ehk = 140 V ac; Ec1 = Ec2 = Eb = 0	---	---	---	---	---	---
Heater-cycling life-test end point:	---								
Heater-cathode leakage	1336	---		---	---	Ihk	---	25	µA dc
Stability life	1516	5/	Ehk = -200 V dc; Rg1 = 0.1 Meg; TA = room	---	---	---	---	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method	Notes	Conditions	Acceptance level	Inspection level or code	Symbol	Limits		Unit
							Min	Max	
Conformance inspection, part 3 - Continued									
Stability life-test end point:	---								
Change in transconductance (1) of individual tubes	1306	---		---	---	ΔSmt	---	10	%
Intermittent life	1501	6/	Ehk = -200 V dc; Rg1 = 0.1 Meg	---	---	---	---	---	---
Intermittent life-test end points (500 hours)	---	7/							
Total grid current	1266	---		---	---	Ic1	0	-2.0	µA dc
Heater current	1301	---		---	---	If	530	670	mA
Change in transconductance (1) of individual tubes	1306	---		---	---	ΔSmt	---	20	%
Transconductance (2)	1306	---	Ef = 5.7 V	---	---	ΔSmEf	---	15	%
Heater-cathode leakage	1336	---		---	---	Ihk	---	30	µA dc
Insulation of electrodes	1211	---	E (g1 to all) = -50 V dc E (a to all) = -200 V dc	---	---	---	---	---	---
Transconductance (1), average change	1306	---		---	---	AvgΔSmt	---	15	%
Intermittent life-test end points (1,000 hours)	---	8/							
Total grid current	1266	---		---	---	Ic1	0	-2.0	µA dc
Change of transconductance (1) of individual tubes	1306	---		---	---	ΔSmt	---	25	%
Heater-cathode leakage	1336	---		---	---	Ihk	---	30	µA dc
Insulation of electrodes	1211	---	E (g1 to all) = -50 V dc E (a to all) = -200 V dc	---	---	---	---	---	---

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ This voltage shall be read with a high-impedance voltmeter connected between grid and cathode.

2/ The screen grid shall be utilized as the anode (output is in screen grid circuit). Anode voltage = 136 V dc.

3/ Prior to this test, tubes shall be preheated 5 minutes at the conditions indicated below. The 3-minute test is not permitted. Test at specified conditions within 3 seconds after preheating. Grid emission shall be the last test performed on the sample selected for grid emission test.

Ef	Ebb	Ecc2	Ecc1	Rg1	Rk
V	V dc	V dc	V dc	Meg	Ohms
7.5	136	136	+8	0.125	200

4/ This test shall be conducted on the initial lot and thereafter on a lot approximately every 12 months. When one lot has passed, the 12-month rule shall apply. In the event of lot failure, the lot shall be rejected and the succeeding lots shall be subjected to this test until a lot passes. MIL-STD-105, sample size code letter E, shall apply.

5/ The acceptance level shall be 1.0, inspection level S3.

6/ The life-test sample shall consist of 20 tubes per lot and no tube failures shall be permitted. In the event of rejection of the first sample, a second sample of 40 tubes shall be selected from the lot. Acceptance shall then be based on the combined first and second samples and shall not exceed a total of two tube failures.

7/ No defectives per characteristic shall be allowed for the first sample. Total defectives shall be not greater than 1 for combined samples.

8/ No defectives per characteristic shall be allowed for the first sample. Total defectives shall be not greater than 2 for combined samples.

9/ Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

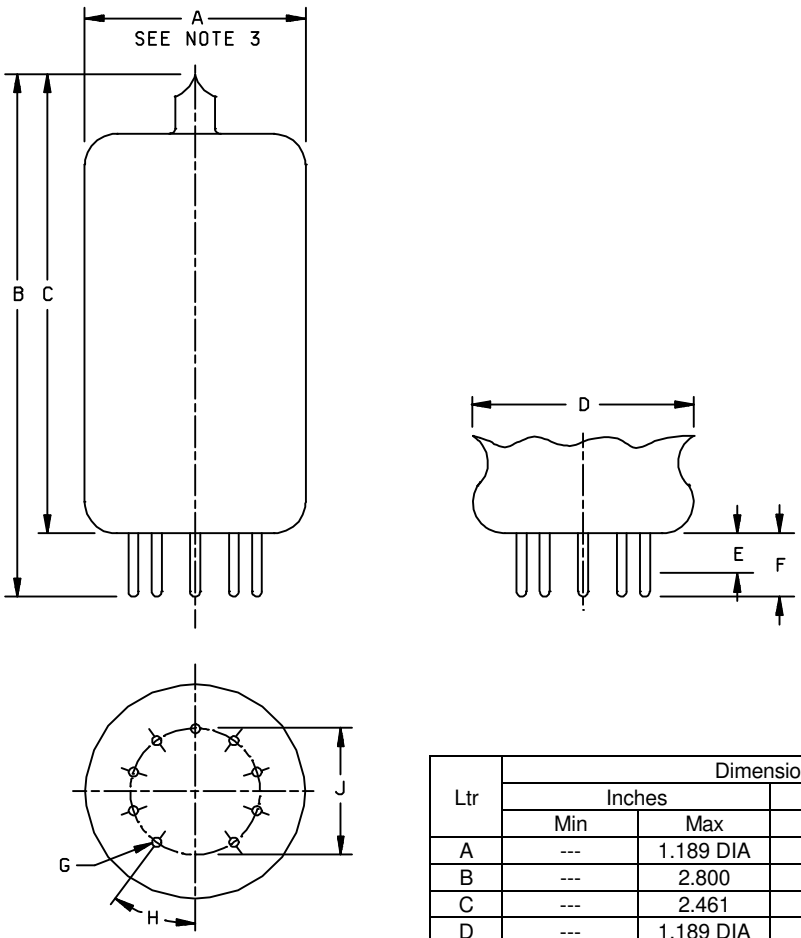

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	---	1.189 DIA	---	30.20 DIA
B	---	2.800	---	71.12
C	---	2.461	---	62.51
D	---	1.189 DIA	---	30.20 DIA
E	.250	---	6.35	---
F	---	.375	---	9.53
G	.0485 DIA	.0530 DIA	1.232 DIA	1.346 DIA
H	36° TYP		36° TYP	
J	.682 DIA	.692 DIA	17.32 DIA	17.58 DIA

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based on 1 inch = 25.4 mm.
3. The minimum measurement should be made in the area included between .375 inch (9.53 mm) from the bottom of bulb to the top of bulb body.

FIGURE 1. Outline drawing of electron tube type 8233.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - CR4
Navy - AS, CG, MC, OS, SH
Air Force - 19, 99

Preparing activity:
DLA - CC

(Project 5960-3546-23)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.