INCH-POUND
MIL-PRF-1/1593E
w/AMENDMENT 1
22 September 2022
SUPERSEDING
MIL-PRF-1/1593E
15 August 2012

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, RECEIVING

TYPE 8233

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described
herein shall consist of this document and MIL-PRF-1.

DESCRIPTION: Pentode, sharp cutoff.
Outline: See figure 1.
Base: E9-23.
Envelope: T9.
Cathode: Coated unipotential.

Base connections:

Pin No.	1	2	3	4	5	6	7	8	9
Element	a	g3	g2	h	h	g3	k	g1	k

ABSOLUTE MAXIMUM RATINGS:

Parameter:	Ef	Ebb	Eb	Ecc2	Ec2	Ec3	Ecc1	Ec1	egk
Unit:	V	V dc	V dc	V dc	V dc	V dc	V dc	V dc	v
Maximum:	6.6	400	200	350	175	---	---	0, -55	0
Minimum:	6.0	---	---	---	---	---	---	---	-110
Test conditions:	6.3	136	---	136	---	0	+8	---	---

ABSOLUTE MAXIMUM RATINGS:

Parameter:	Ehk	Rk	Rg1	Ik	Pg2	Pp	TE	Alt
Unit:	v	Ohms	MegΩ	mA dc	W	W	°C	ft
Maximum:	200	---	0.125	75	1.5	10	180	60,000
Minimum:	---	---	---	---	---	---	---	---
Test conditions:	0	200	---	---	---	---	---	---

See footnotes at end of table I.

GENERAL:

Qualification: Not required.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method MIL-STD-1311	Notes 5/	Conditions	Symbol	Limits		Unit
					Min	Max	
Conformance inspection, -part 1							
Heater current	1301	---		If	540	660	mA dc
Heater-cathode leakage	1336	---		Ihk	---	15	µA dc
Total grid current	1266	---		Ic1	0	-1.0	µA dc
Electrode voltage (grid 1)	1261	1 /		Ec1	2.3	3.7	V dc
Electrode current (screen	1256	---		Ic2	---	7.0	mA dc
Transconductance (1)	1306	---		Sm	38,000	52,000	µmhos
Electrode current (anode)	1256	---	Ec1= -6 V dc; Eb = 125 V dc; Ec2 = 125 V dc	Ib	---	1.0	mA dc
Short and discontinuity detection	1201	---	egk = 110 v (max)		---	---	---
Conformance inspection,							
part 2							
Insulation of electrodes	1211	---	E (g1 to all) = -50 V c E (a to all) = -200 V c	---	---	---	---
Transconductance (2)	1306	---	Ef = 5.7 V	ΔSm Ef	---	10	%
Amplification factor	1316	2/		Mu	26	34	---
Grid emission	1266	3/	Ef = 7.5 V; Ecc1 = -10 V dc; Rg1 = 0.1 MegΩ	Ic1	0	-2.0	µA dc
Direct-interelectrode capacitance	1331	---	No shield	Cin Cout Cgp	15 3.6 ---	21 4.4 0.15	pF pF pF
Barometric pressure , reduced	1002	---	Pressure = 55 ± 5 mmHg; voltage = 300 V ac	---	---	---	---
High-frequency vibration	1031	---	Rp = 2,000 ohms; Rk=56ohms,unbypassed; Rg = 20,000 ohms; Cg2 = 25 µF; Ebb = Ecc2 = 225 V dc; Ec1 = 0 F = 50 Hz	Ep	---	50	mV ac

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method MIL-STD-1311	Notes 5/	Conditions	Symbol	Limits		Unit
					Min	Max	
Conformance inspection part 2 - Continued							
Shock	1041	4/	450 G; no voltages applied	---	---	---	----
Vibration-fatigue	1031	4/		---	---	---	----
Shock and vibration- fatigue-test end points:	---	---					
High-frequency vibration	1031	---	Rp = 2,000 ohms; Rk = 56 ohms,unbypassed; Rg2 = 20,000 ohms, Cg2 = 25 µF; Ebb = Ecc2 = 225 V dc; Ec1 = 0; F = 50 Hz	Ep	---	100	mV ac
Heater-cathode leakage	1336	---		Ihk	---	25	µA dc
Total grid current	1266	---		Ic1	0	-2.0	µA dc
Change in transconduc-tance (1) of individual tubes	1306	---		ΔSmt	---	20	%
Envelope strain	2126	---		---	---	---	---
Permanence of marking	1105	---		---	---	---	---
Conformance inspection, part 3							
Heater-cycling life	1506	---	Ef = 7.5 V; Ehk = 140 V ac; Ec1 = Ec2 = Eb = 0	-	--	--	---
Heater-cycling life-test end point:	---						
Heater-cathode leakage	1336			Ihk	----	25	µA dc
Stability life	1516		Ehk = -200 V dc; Rg1 = 0.1 MegΩ; TA = room	---	---	---	---

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method MIL-STD-1311	Notes 5/	Conditions	Symbol	Limits		Unit
					Min	Max	
Conformance inspection, -part 3 - Continued							
Stability life-test end point:	-----						
Change in transconductance (1) of individual tubes	1306	----		ΔSmt	----	10	%
Intermittent life	1501	6/	Ehk = -200 V dc; Rg1 = 0.1 MegΩ	----	-----	----	-----
Intermittent life-test end points (500 hours)	-----	7/					
Total grid current	1266	----		Ic1	0	-2.0	μA dc
Heater current	1301	----		If	530	670	mA
Change in transconductance (1) of individual tubes	1306	----		ΔSmt	----	20	%
Transconductance (2)	1306		Ef = 5.7 V	ΔSmEf	----	15	%
Heater-cathode leakage	1336			Ihk	---	30	μA dc
Insulation of electrodes	1211	---	E (g1 to all) = -50 V dc E (a to all) = -200 V dc	----	-----	----	---
Transconductance (1), average change	1306	---		Avg ΔSmt	----	15	%
Intermittent life-test end points (1,000 hours)	----	8/					
Total grid current	1266	----		Ic1	0	-2.0	μA dc
Change of transconductance (1) of individual tubes	1306	----		ΔSmt	----	25	%
Heater-cathode leakage	1336	----		Ihk	----	30	μA dc
Insulation of electrodes	1211	----	E (g1 to all) = -50 V dc E (a to all) = -200 V dc	----	----	----	----

See footnotes at top of next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

1/ This voltage shall be read with a high-impedance voltmeter connected between grid and cathode.

2/ The screen grid shall be utilized as the anode (output is in screen grid circuit). Anode voltage = 136 V dc.

3/ Prior to this test, tubes shall be preheated 5 minutes at the conditions indicated below. The 3-minute test is not permitted. Test at specified conditions within 3 seconds after preheating. Grid emission shall be the last test performed on the sample selected for grid emission test.

Ef	Ebb	Ecc2	Ecc1	Rg1	Rk
V	V dc	V dc	V dc	MegΩ	Ohms
7.5	136	136	+8	0.125	200

4/ This test shall be conducted on the initial lot and thereafter on a lot approximately every 12 months. When one lot has passed, the 12-month rule shall apply. In the event of lot failure, the lot shall be rejected and the succeeding lots shall be subjected to this test until a lot passes (see 5/).

5/ This specification sheet uses accept on zero defect sampling in accordance with MIL-PRF-1, table III.


6/ The life-test sample shall consist of 20 tubes per lot and no tube failures shall be permitted. In the event of rejection of the first sample, a second sample of 40 tubes shall be selected from the lot. Acceptance shall then be based on the combined first and second samples and shall not exceed a total of two tube failures.

7/ No defectives per characteristic shall be allowed for the first sample. Total defectives shall be not greater than 1 for combined samples.

8/ No defectives per characteristic shall be allowed for the first sample. Total defectives shall be not greater than 2 for combined samples.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

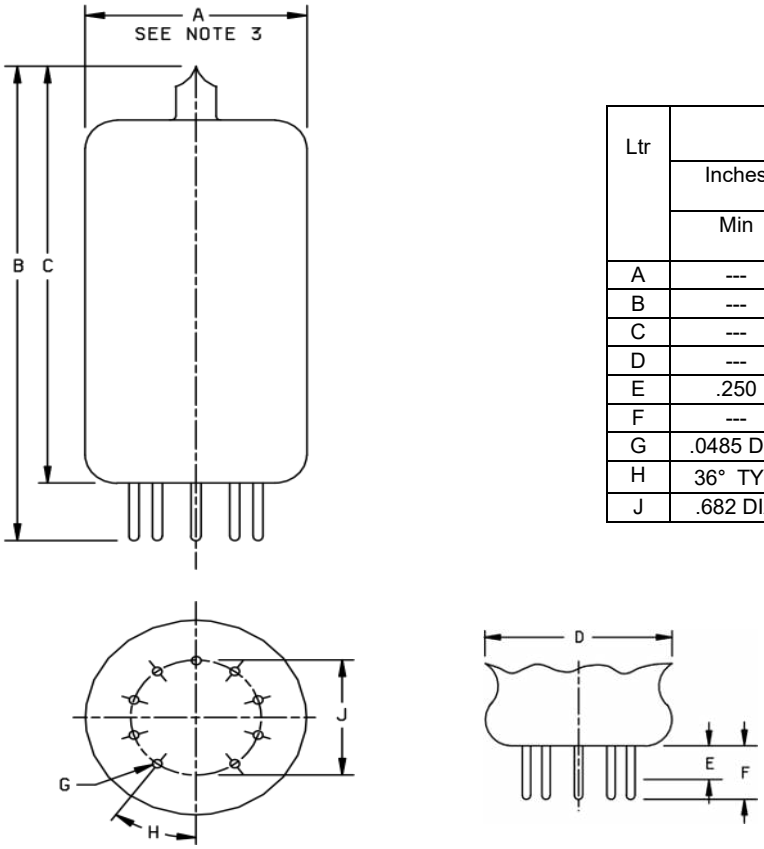

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
A	---	1.189 DIA	---	30.20 DIA
B	---	2.800	---	71.12
C	---	2.461	---	62.51
D	---	1.189 DIA	---	30.20 DIA
E	.250	---	6.35	---
F	---	.375	---	9.53
G	.0485 DIA	.0530 DIA	1.232 DIA	1.346 DIA
H	36° TYP		36° TYP	
J	.682 DIA	.692 DIA	17.32 DIA	17.58 DIA

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based on 1 inch = 25.4 mm.
3. The minimum measurement should be made in the area included between .375 inch (9.53 mm) from the bottom of bulb to the top of bulb body.

FIGURE 1. Outline drawing of electron tube type 8233.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-PRF-1, this specification sheet references MIL-STD-1311.

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Army – CR
Navy – EC
Air Force - 85
DLA – CC

Preparing activity:
DLA - CC
(Project 5960-2022-023)

Review activities:
Army - CR4
Navy – AS, CG, MC, OS, SH
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:03Z
Check the source to verify that this is the current version before use.