
MILITARY SPECIFICATION SHEET

SWITCHES SENSITIVE, SPDT, 5 AMPERES, UNSEALED


INACTIVE FOR NEW DESIGN AFTER 30 JUNE 1970

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense

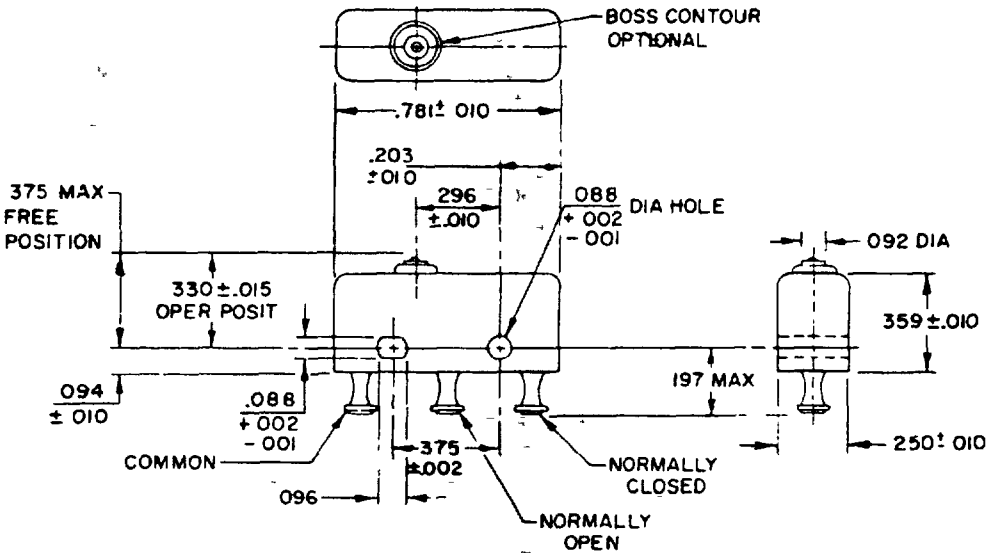

INCHES	MM	INCHES	MM
.001	.03	.203	5.16
.002	.05	.224	5.69
.010	.25	.250	6.35
.015	.38	.296	7.52
.088	2.24	.328	8.33
.092	2.34	.330	8.38
.094	2.39	.359	9.12
.096	2.44	.375	9.53
.197	5.00	.781	19.84



DOUBLE TURRET TYPE

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is ±.005 (.13 mm).
3. Mounting holes will accept .087 (2.21 mm) maximum diameter pins or screws on .375±.002 (9.53±.05 mm) centers.
4. Terminal contour and facing direction optional within maximum dimensions shown
5. Cylindrical or flat type optional when double turret is specified. Must accept AN-20 wire (2)
6. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm

© denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration	See figure
Enclosure design	1 (Unsealed).
Temperature characteristics	2 (-65° to +125°C).
Shock type	M (100G)
Vibration grade	2 (10 to 2,000 Hz)
Weight	.006 pound maximum
Operating characteristics	
Actuating force	5 ounces maximum
Releasing force	1 ounce minimum
Movement differential	.005 inch maximum
Pretravel	.025 inch maximum
Overtravel	.003 inch minimum
Contact resistance	Not applicable
Dielectric withstanding voltage	
Sea level	1,000 vrms
Altitude	50,000 ft - 400 vrms
	In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable
Minimum current	25,000 cycles
Mechanical endurance	500,000 cycles
Electrical endurance	25,000 cycles
Electrical ratings	See table I
Qualification	
Group submission	See table II
©Quality assurance	
Group B	Not applicable
Group C	Not applicable

TABLE I Electrical ratings

Load	Sea level		50,000 feet
	28 VDC	115 VAC 60 Hz	28 VDC
	amperes	amperes	amperes
Resistive - - - -	5	5	5
Inductive- - - - -	3	5	2.5
Lamp - - - - - -	2.4	1.5	2.4

TABLE II Qualification inspection

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805	M8805/22-001 (all sample units)	M8805/22-002 (2 sample units) 1. Terminal strength 2. Dielectric withstanding voltage 3. Visual and mechanical examination	All

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

Part number	Terminal style	Terminal strength
M8805/22-001	Single turret	5 pounds
M8805/22-002	Double turret	5 pounds

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - EL, MU
Navy - SH, AS, OS
Air Force - 17, 85
DSA - ES

User activities
Army - MI, AV
Navy - MC
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0715)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS. In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department of the NAvy
Washington DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.