MILITARY SPECIFICATION SHEET

SWITCH ASSEMBLIES, SENSITIVE, PUSH, MOMENTARY, 5 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch assemblies described herein shall consist of this document and the latest issue of Specification MIL-S-8805.


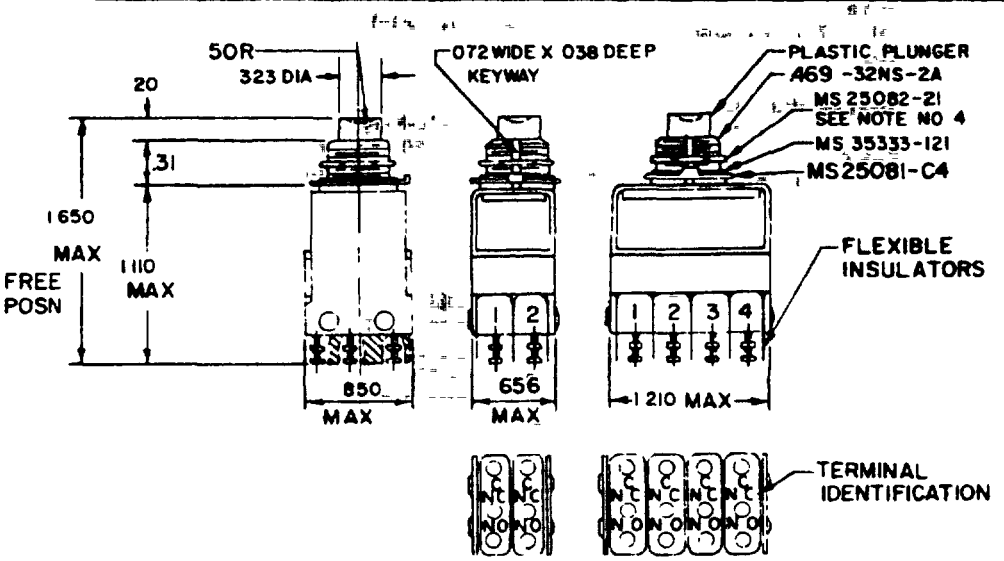


FIGURE 1 FIGURE 2

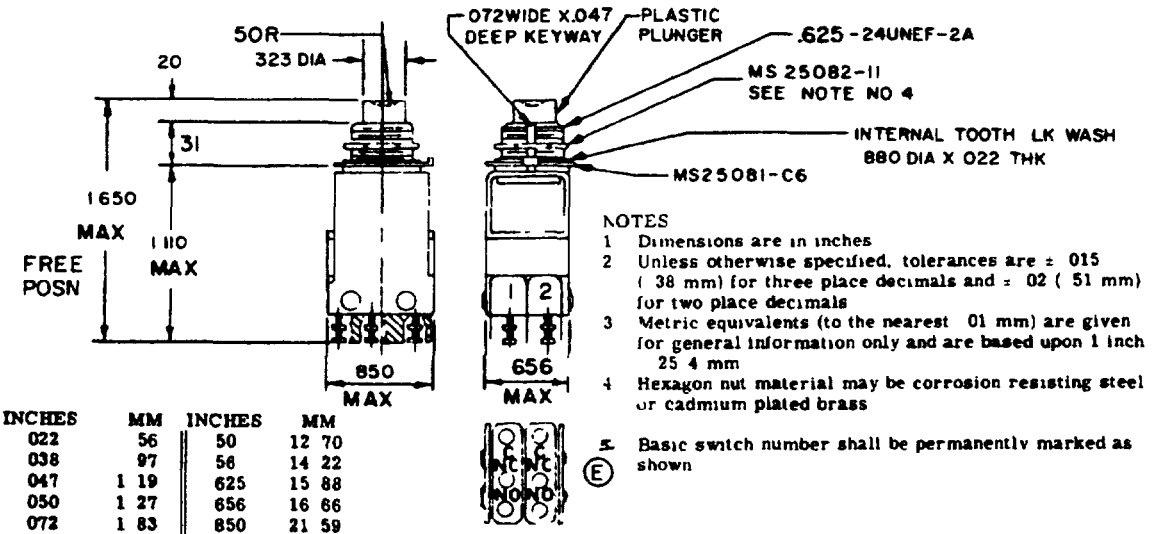

INCHES	MM	INCHES	MM
022	56	50	12 70
038	97	56	14 22
047	1 19	625	15 88
050	1 27	656	16 66
072	1 83	850	21 59
20	5 08	880	22 35
31	7 87	1 110	28 19
323	8 20	1 210	30 73
469	11 91	1 650	41 91

FIGURE 3

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerances are ± 015 (38 mm) for three place decimals and ± 02 (51 mm) for two place decimals
3. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
4. Hexagon nut material may be corrosion resisting steel or cadmium plated brass
5. Basic switch number shall be permanently marked as shown (E)

(E) denotes change.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

REQUIREMENTS.

Dimensions and configuration: See figures
Enclosure design: 1 (Unsealed).
Temperature characteristic 1 (-55° to +85°C).
Shock type. M (100G, test condition I, method 213 of MIL-STD-202).
Vibration grade: 1 (10 to 500 Hz).
Weight: See table III.
Operating characteristics:
Coincidence of operating and releasing points: All poles shall have transferred within .010 inch of plunger travel.
Total plunger travel: .075 inch approximately (information only).
Operating force: See table III.
Material:
Bracket: Corrosion-resistant steel.
(E) Plunger cap In accordance with L-P-410 or type CFG of MIL-M-14
(E) Switch assembly Basic switch shall be MS25085-2 (MIL-S-8805/2) switch listed on QPL-8805, except that terminal markings shall be in accordance with identification as shown on figure
Mechanical endurance: 50,000 cycles.
Electrical endurance: 25,000 cycles.
Electrical ratings: See table I.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - -	5	5	5
Inductive - -	3	5	2.5
Lamp - - - -	2.4	1.5	2.4

Qualification inspection (group submission) See table II.

Part numbers and characteristics See table III

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE II. Qualification inspection (group submission).

Examination or test	Basic switch assembly	Additional sample units for combined submission	Extent of approval
Group I Visual and mechanical examination Operating characteristics	M8805/23-004 (12 sample units)	(2 sample units each) M8805/23-001 M8805/23-002 M8805/23-003 M8805/23-005 (tested to group I only)	All
Group II Strength of actuating means 1/ Strength of mounting bushing 1/ Thermal shock Vibration Shock Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group III Salt spray (corrosion) Visual and mechanical examination	(2 sample units from group I)	---	
Group IV Low temperature operation (2 sample units only) Mechanical endurance at low temperature (2 units) 2/ Mechanical endurance at high temperature (2 units) Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group V Electrical endurance Inductive load, dc	(2 sample units from group I)	---	

1/ Two sample units only.
2/ Same sample units as for low temperature operation

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE III. Part numbers and characteristics.

Part number	Figure	Circuit characteristic	Operating force	Weight	Button color
			lb max	lb max	
M8805/23-001	1	2PDT	4 5	055	Black
M8805/23-002	1	2PDT	4 5	.055	Red
M8805/23-003	2	4PDT	5 5	.075	Black
M8805/23-004	2	4PDT	5.5	.075	Red
M8805/23-005 1/	3	2PDT	4 5	055	Black

1/ M8805/23-005 - Inactive for new design

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army -
Navy -
Air Force - 17, 80
DSA - ES

User activities
Army - MI, AV, WC
Navy - AS, MC, OS
Air Force - 19

Preparing activity
Navy - EC

Agent.
DSA - ES

(Project 5930-0873-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department of the Navy
Washington DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:03Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil/online/start/ 2026-04-27T11:03Z
Check the source to verify that this is the current version before use.