
MILITARY SPECIFICATION SHEET

SWITCH ASSEMBLY, SENSITIVE, PUSH, ALTERNATE, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805

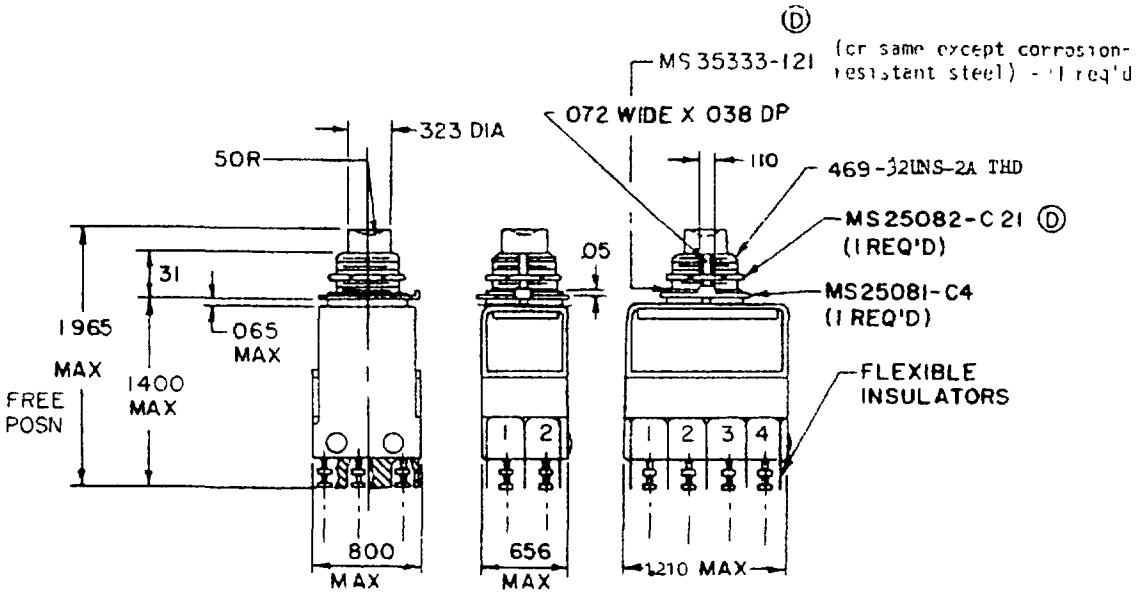

INCHES	MM	INCHES	MM
038	97	50	12 70
065	1 65	656	16 66
072	1 83	800	20 32
110	2 79	1 210	30 73
31	7 87	1 400	35 56
323	8 20	1 965	49 91
469	11 91		

NOTES
1. Dimensions are in inches
2. Unless otherwise specified tolerance is ± 015 (38 mm)
3. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm
4. Basic switch number shall be permanently marked as shown

Ⓓ Part 1 Dimensions and configuration
(D) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1
Enclosure design 1 (Unsealed)
Temperature characteristic 1 (-55 to +85 C)
(D) Shock type M (100 G test condition I method 213 of MIL-STD-202)
Vibration grade 1 (10 to 500 Hz)
Weight See table I
Operating characteristics
Operation Alternate action
Coincidence of operation or releasing points All poles shall have transferred within .010 inch of plunger travel
Total plunger travel .085 inch approximately (information only)
Operating force See table I

TABLE I Part numbers and characteristics

Part number	Type	Circuit characteristic	Operating force	Weight	Button color
			lb max	lb max	
M8805/25-001	I	2PDT	6	.060	Black
M8805/25-002	I	2PDT	6	.060	Red
M8805/25-003	II	4PDT	7	.100	Black
M8805/25-004	II	4PDT	7	.100	Red

Material
Bracket Corrosion-resistant steel
(D) Plunger cap In accordance with L-P-410 or type CFG of MIL-M-14
(D) Switch assembly Basic switch shall be MS25085-2 (MIL-S-8805/2) switch listed on QPL-8805 and may have integral leaf actuator
Mechanical endurance 50,000 cycles
Electrical endurance 25,000 cycles
Electrical ratings See table II
Qualification inspection (group submission) See table III

TABLE II Electrical ratings

Load	Sea level		50,000 feet
	28 Vdc	115 Vac 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive		5	3
Inductive	3	5	2.5
Lamp	2	1.5	2.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

Ⓓ TABLE III Qualification inspection (group submission)

Examination or test	Basic switch assembly	Additional sample units for combined submission	Extent of approval
Group I Visual and mechanical examination Operating characteristics	M8805/25-004 (12 sample units)	(2 sample units each) M8805/25-001 M8805/25-002 M8805/25-003 (tested to group I only)	All
Group II Strength of actuating means 1/ Strength of mounting bushing 1/ Thermal shock Vibration Shock Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group III Salt spray (corrosion) Visual and mechanical examination	(2 sample units from group I)	---	
Group IV Low temperature operation (2 sample units only) Mechanical endurance at low temperature (2 units) 2/ Mechanical endurance at high temperature (2 sample units only) Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group V Electrical endurance Inductive load, dc	(2 sample units from group I)	---	

1/ Two sample units only
2/ Same sample units as for low temperature operation

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army -
Navy -
Air Force - 17, 80
DSA - ES

User activities
Army - MI, AV, WC
Navy - AS, MC, OS
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0873-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO

DATE

DD FORM 1 JAN 7, 1426

PREVIOUS EDITION IS [illegible] OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.