NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-8805/26F
19 December 1980
SUPERSEDING
MIL-S-8805/26E
23 July 1973

PERFORMANCE SPECIFICATION SHEET

SWITCH ASSEMBLIES, SENSITIVE,
TOGGLE LEVER (WITH INTEGRAL LEAF),
5 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

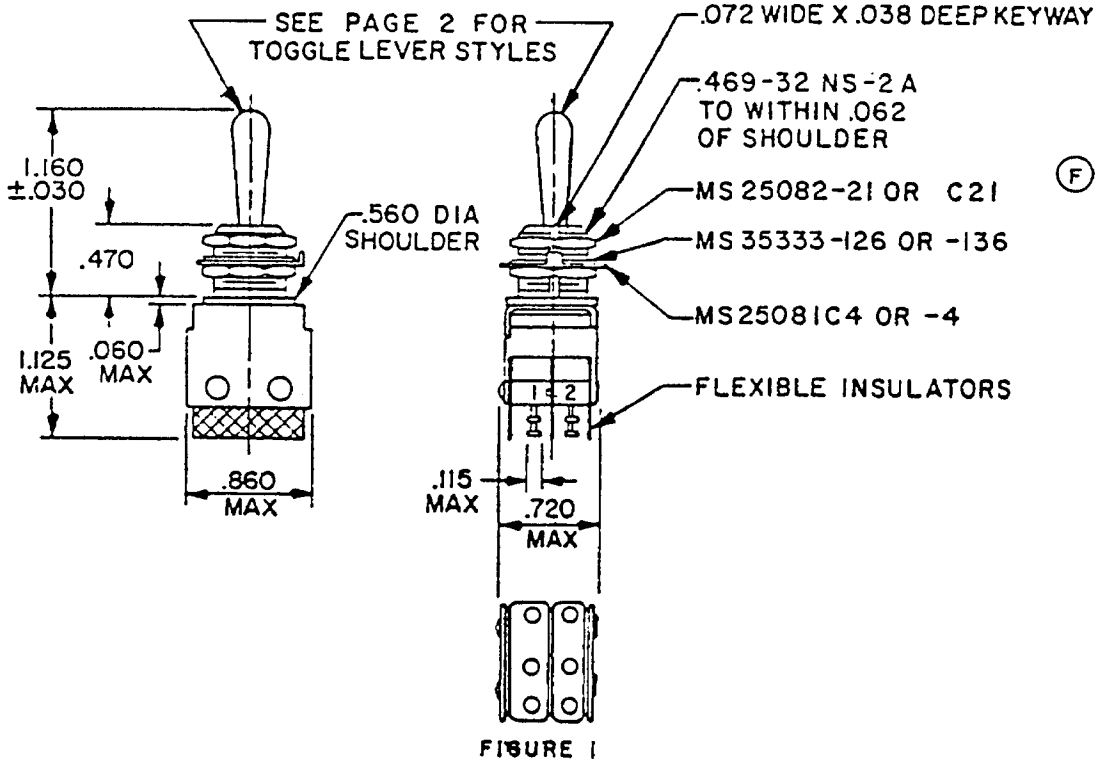


FIGURE 1

(F) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Enclosure design: 1 (Unsealed).

Temperature characteristic: 1 (-55°C to +85°C).

Shock type: M (100G, test condition I, method 213 of MIL-STD-202).

Vibration grade: 1 (10-500 Hz).

Weight: See table III.

Operating characteristics:

Coincidence of operating and releasing points: All poles shall transfer within 10° of lever travel.

Material:

Bracket and lever: Corrosion-resistant steel.

Switch assembly: Basic switch shall be MS25085-2 (MIL-S-8805/2) switch listed on QPL-8805.

Contact resistance: Not applicable.

Dielectric withstanding voltage:

Sea level: 1,000 Vrms.
Altitude: 50,000 ft - 400 Vrms.

In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

Mechanical endurance: 100,000 cycles.

Electrical endurance: 25,000 cycles.

Electrical ratings: See table I.

Qualification inspection (group submission): See table II.

Military part numbers: See table III.

Circuit configuration: See table IV.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 Vdc	115 Vac, 60 Hz	28 Vdc
	amperes	amperes	amperes
Resistive - -	5	5	5
Inductive - -	3	5	2.5
Lamp- - - -	2.4	1.5	2.4

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

TABLE II. Qualification inspection (group submission).

Examination or test	Basic switch assembly	Additional sample units for combined submission	Extent of approval
Group I			
Visual and mechanical examination Operating characteristics	M8805/26-002 (12 sample units)	(2 sample units each) M8805/26-003 M8805/26-012 (tested to group I only)	All
Group II			
Strength of actuating means 1/ Strength of mounting bushing 1/ Thermal shock Vibration Shock Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group III			
Salt spray (corrosion) Visual and mechanical examination	(2 sample units from group I)	---	
Group IV			
Low temperature operation (2 sample units only) Mechanical endurance at low temperature (2 units) 2/ Mechanical endurance at high temperature (2 units) Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	(4 sample units from group I)	---	
Group V			
Electrical endurance Inductive load, dc	(2 sample units from group I)	---	

1/ Two sample units only.
2/ Same sample units as for low temperature operation.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:04Z
Check the source to verify that this is the current version before use.

TABLE III. Part numbers and characteristics.

Part number	Figure number	Lever style	Table IV circuit configuration	Switch action			Weight
				Opposite keyway	Center	Keyway	lb max
M8805/26-001	1	A	1	Main	None	Main	.075
M8805/26-003		B					.075
M8805/26-002	3	A	4				.100
M8805/26-004		B					.100
M8805/26-005	1	A	2	Mom	Main	Mom	.075
M8805/26-006		B					.075
M8805/26-007		A		Main	Main	Main	.075
M8805/26-008		B					.075
M8805/26-009		A		Mom	Main	Main	.075
M8805/26-010		B					.075
M8805/26-011	2	A	3	Mom	Main	Mom	.090
M8805/26-012		B					.090
M8805/26-013		A		Main	Main	Main	.090
M8805/26-014		B					.090

TABLE IV. Circuit configuration.

Circuit Configuration	Switch pole number	Circuit closed with toggle lever in		
		Opposite keyway side	Center	Keyway side
1	1	C-NC	None	C-NO
	2	C-NC		C-NO
2	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
3	1	C-NO	C-NC	C-NC
	2	C-NC	C-NC	C-NO
	3	C-NO	C-NC	C-NC
4	1	C-NC	None	C-NO
	2	C-NC		C-NO
	3	C-NC		C-NO
	4	C-NC		C-NO

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy - AS
Air Force - 17, 99, 11
DLA - ES

User activities:
Army - AR
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1161)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:04Z
Check the source to verify that this is the current version before use.

TABLE IV. Shear strength requirements for spot welds in foil

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-8805/26F

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:04Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Department of the Navy, ELEX 5043
Washington, DC 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:04Z
Check the source to verify that this is the current version before use.