NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-8805/28E
10 March 1987
SUPERSEDING
MIL-S-8805/28D
11 July 1972

PERFORMANCE SPECIFICATION SHEET

SWITCH, SENSITIVE, MOMENTARY, SPDT, 7.5 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switch described herein shall consist of this specification and the latest issue of MIL-S-8805.

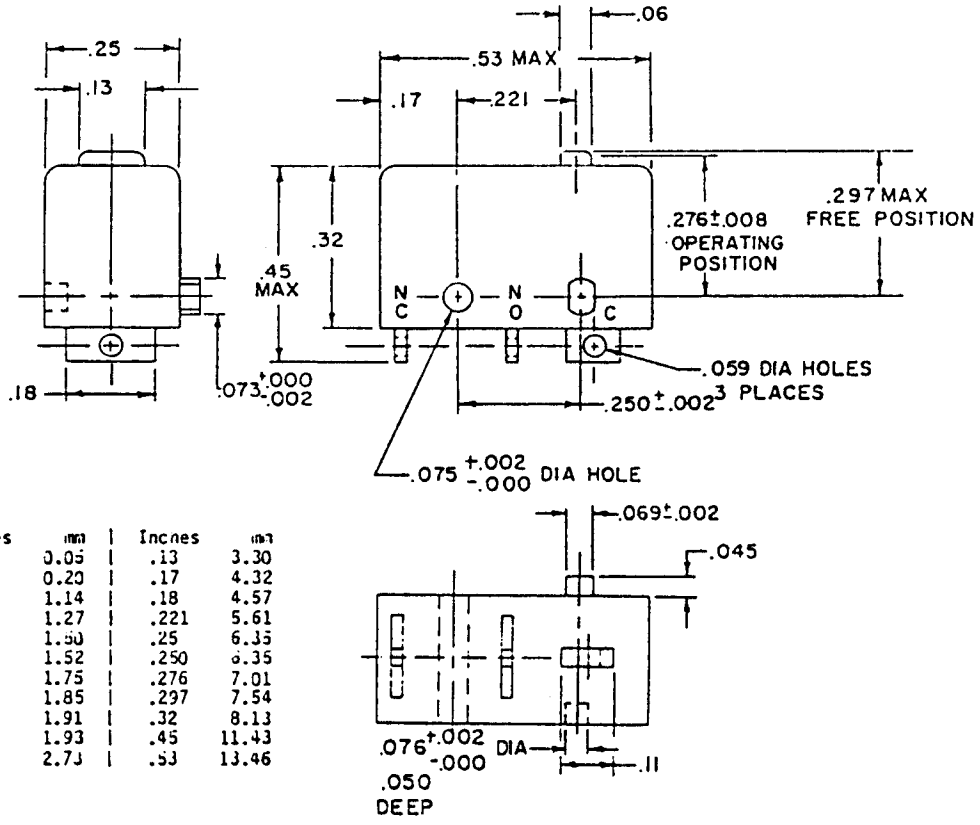

Inches	mm	Inches	mm
.002	0.05	.13	3.30
.008	0.20	.17	4.32
.045	1.14	.18	4.57
.050	1.27	.221	5.61
.059	1.50	.25	6.35
.06	1.52	.250	6.35
.069	1.75	.276	7.01
.073	1.85	.297	7.54
.075	1.91	.32	8.13
.076	1.93	.45	11.43
.11	2.79	.53	13.46

Notes:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.02 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals.
3. Exact shape of switch optional, provided dimensions specified are not exceeded.
4. Terminal designations NO, NC and C shall be permanently molded or hot stamped on adjacent areas of the switch.
5. Metric eqivalents are given for general information only.

FIGURE 1. Configuration and dimensions.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1.
Enclosure design: 1 (Unsealed).
Temperature characteristic. 1 (-55°C to +85°C).
Shock type Method 213, test condition A, MIL-STD-202 (50 G).
(E) Sinusoidal vibration grade: 1 (10 to 500 Hz).
Weight .060 ounce maximum.
Operating characteristics
Actuating force .7.05 ounces maximum.
Movement differential: .003 inch maximum.
Pretravel. .015 inch maximum.
Overtravel .005 inch minimum.
Strength of actuating means. 25 pounds.
Terminal strength. 5 pounds.
Material
(E) Plunger May be glass filled nylon.
Mechanical endurance 50,000 cycles at .005 $^{+.001}_{-.000}$ inch overtravel.
Electrical endurance 25,000 cycles.
Electrical ratings. See table I.
(E) Contact resistance (following electrical endurance): Shall not exceed 2 percent of load impedance.

TABLE I. Electrical ratings.

Load	Sea level	
	28 V dc	115 V ac, 400 Hz
	amperes	amperes
Resistive - - - - -	7.5	7.5
Inductive - - - - -	2.5	7.5
(E) Motor - - - - - - -	1.0	1.0

Part number: MS28134-1

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - AR
Navy - OS, SH
Air Force - 11, 99
DLA - ES

User activities:
Army - AV, MI, WC
Navy - AS, MC
Air Force - 19

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5930-1339-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:05Z
Check the source to verify that this is the current version before use.